



## Typical Performance Curves


**GAIN vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.5V

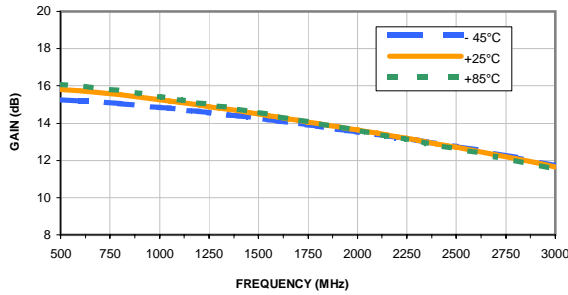


**OUTPUT IP3 vs. FREQUENCY & TEMPERATURE**  
OUTPUT POWER = 5 dBm/1tone, Vd = 5.5V

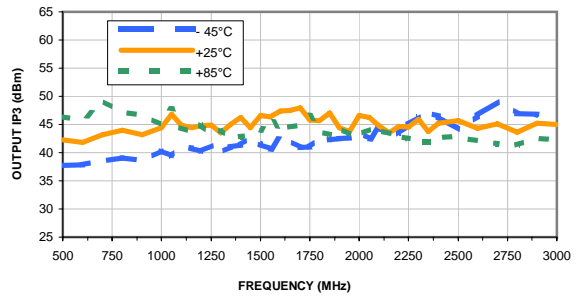


**ISOLATION vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.5V

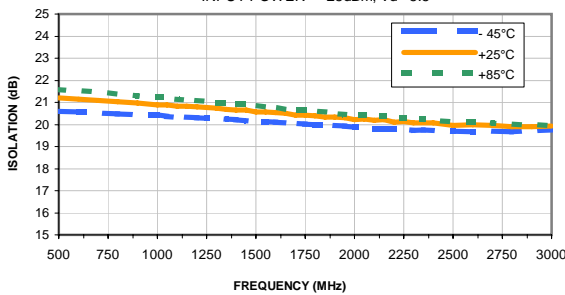


**P1dB vs. FREQUENCY & TEMPERATURE**  
Vd = 5.5V

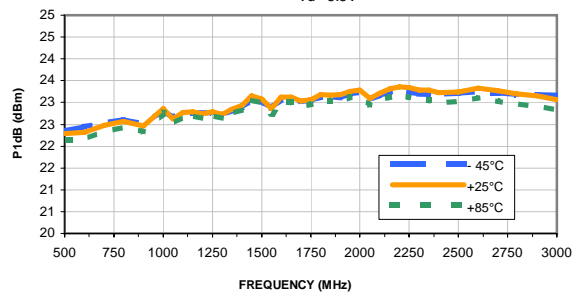


**INPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.5V

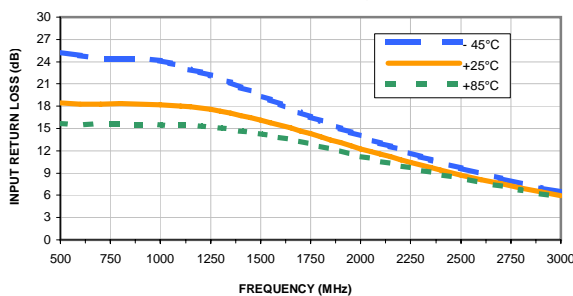

**NOISE FIGURE vs. FREQUENCY & TEMPERATURE**  
Vd = 5.5V

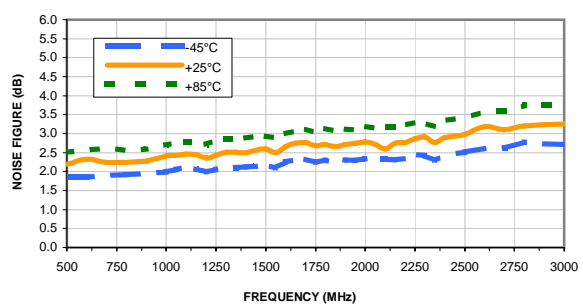

**OUTPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.5V

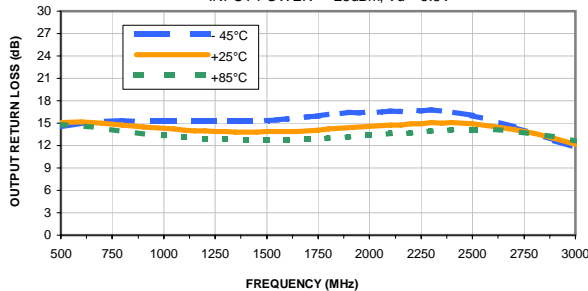

**GAIN VARIATION vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.5V

