


REVISIONS											
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH						
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ						
A	M102713	MODIFIED PATTERN, UPDATED DIM,	01/16/06	GT	IL						

## SUGGESTED MOUNTING CONFIGURATION FOR BK276 CASE STYLE, "Iu" PIN CONNECTION

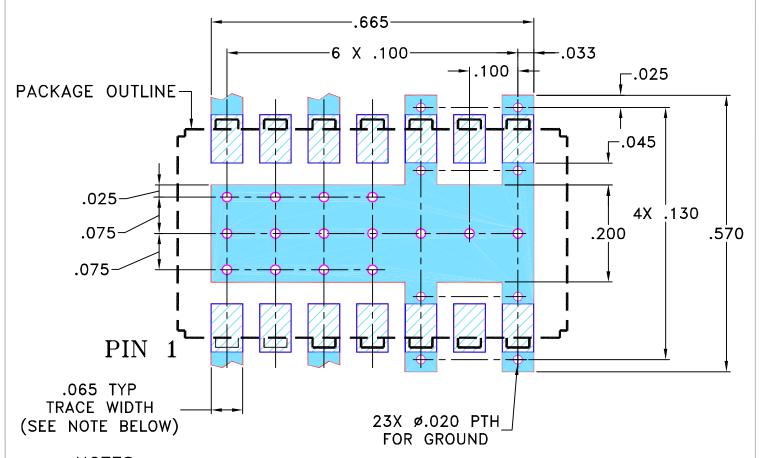

## NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS  $.030" \pm .002"$ . COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE							
DIMENSIONS ARE IN INCHES	DRAWN	MMG	07/18/02	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11236						
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	HY	08/01/02							
3 PL DECIMALS ± .005	APPROVED	DJ	08/05/02							
FRACTIONS ±				] I	PL, lu, BK276, JSPQ, TE			TB-	-59	
☐ Mini-Circuits ®					,,,,					
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	code ident 15542	DRAWING NO:	PL-061		REV:		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					98PL061	SCALE: 5:1	SHEET:	1	OF 1	