


THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M156950	CHANGE PIN CONNECTION CODE	06/16	DK	YB
B	M159071	CHANGE MATERIAL, THICK & COP WEIGHT	12/16	ZV	HH
C	M163058	CHANGE CONDUCTOR WIDTH TO 0.071"	08/17	DK	YB
C	R92292	CHANGE CONDUCTOR WIDTH TO 0.071"	08/17	DK	YB

SUGGESTED MOUNTING CONFIGURATION

FOR PQ2098 /2098-1/2098-2 CASE STYLES 04DC01 PIN CONNECTION, 50 OHM

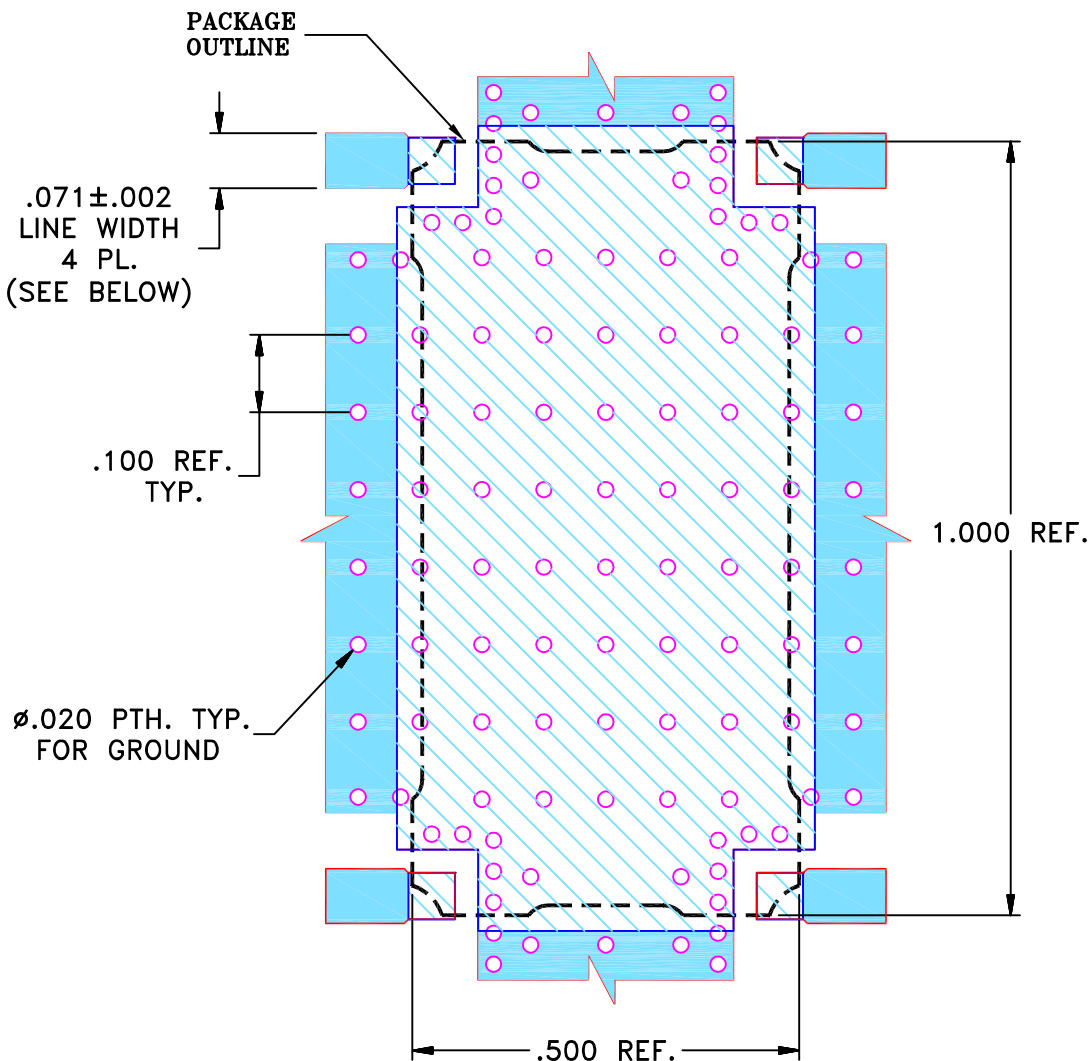

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS R04003C WITH DIELECTRIC THICKNESS. 0.032"±.0015". COPPER: 1 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± 1° FRACTIONS ±	DRAWN	DK (RAVON) 29 DEC 15
	CHECKED	HH (RAVON) 29 DEC 15
	APPROVED	YB (RAVON) 29 DEC 15



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL FOR MBD PQ2098
TB-863+ (50 Ω)

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-469	REV: C
FILE: 98PL469(C)		SCALE: 4:1	SHEET: 1 OF 1