THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M91565	NEW RELEASE	04/16/04	AV	IG
A	M102713	ADDED "...WITH SMOBC"	01/12/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR AT224 CASE STYLE, "pp/kp" PIN CONNECTION

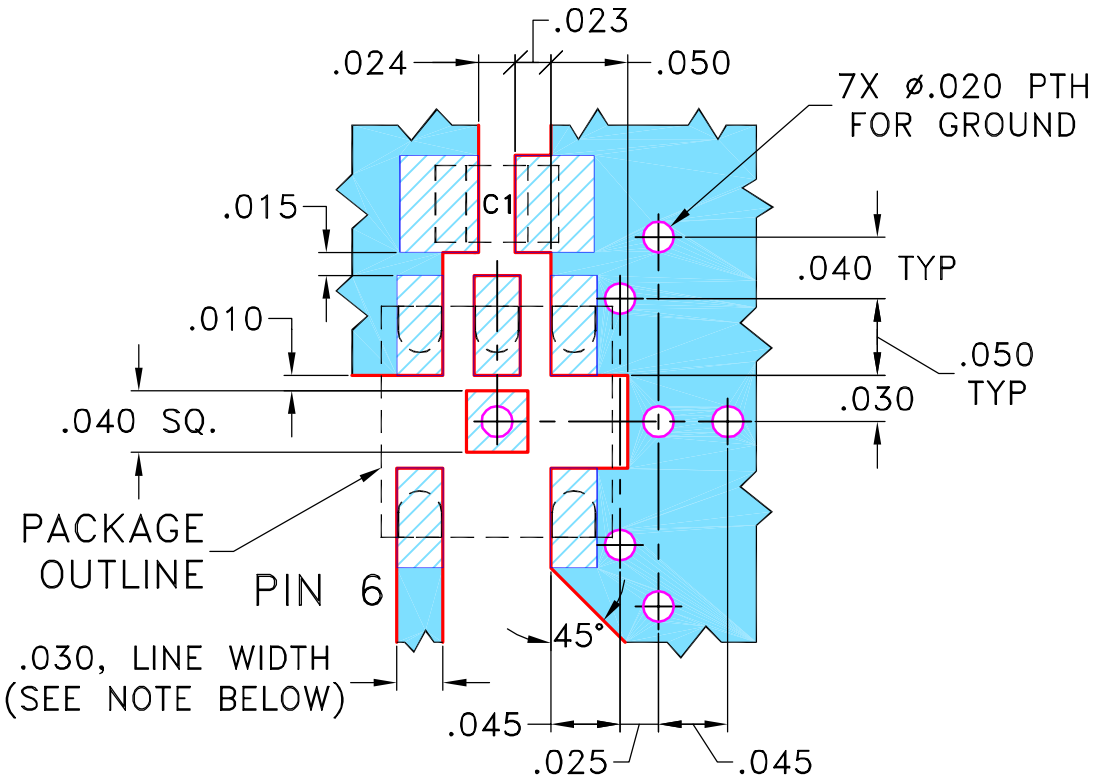

CAPACITOR C1: 0805 SIZE, FOR VALUE SEE CATALOG.

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	03/23/04
TOLERANCES ON:	CHECKED	IL	04/16/04
2 PL DECIMALS ±	APPROVED	IG	04/16/04
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, pp/kp, 75, AT224, TC9, TB-276

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-155	A

FILE:	SCALE:	SHEET:
98PL155	8:1	1 OF 1