


## Outline Dimensions

## NL1008C-7

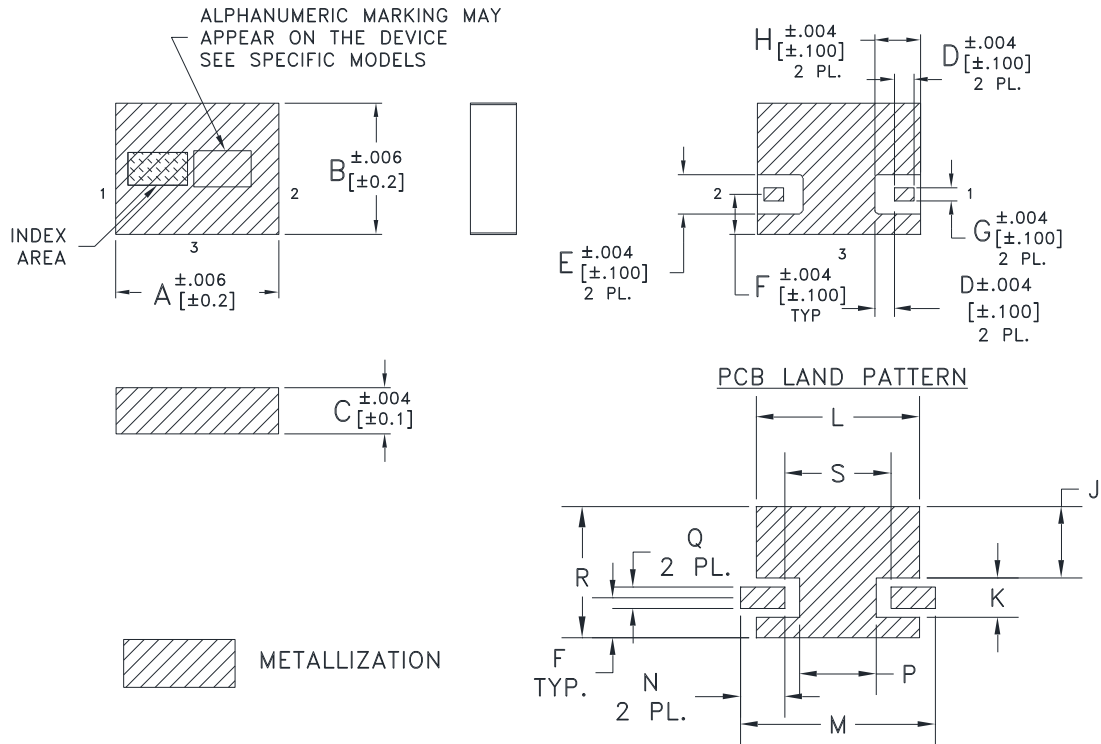

SUGGESTED LAYOUT FOR PCB LAND PATTERN  
TOLERANCE TO BE WITHIN  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L
NL1008C-7	.098 (2.50)	.079 (2.00)	.028 (.70)	.012 (.30)	.024 (.61)	.024 (.61)	.008 (.20)	.028 (.70)	.043 (1.09)	.024 (.60)	.098 (2.50)

CASE#	M	N	P	Q	R	S	WT, GRAM
NL1008C-7	.118 (3.00)	.027 (.70)	.046 (1.20)	.013 (.30)	.079 (2.00)	.064 (1.63)	.019

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

1. Open style, ceramic base.
2. Termination finish:

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

3. Pad tolerance is non-cumulative. Minimum spacing between each pad is .004.
4. Line width should be designed to match 50 $\Omega$  characteristic depending on PCB material and thickness.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified