

X3 Frequency Multiplier

RMK-3-212+

50Ω Output 1200 to 2100 MHz



CASE STYLE: TT1224

The Big Deal

- Wide bandwidth, 1200 to 2100 MHz output
- Wide input power range, +12 to +17 dBm
- Low conversion loss, 14 dB typ.
- Good harmonic suppression: F2, 50 dBc; F4, 53 dBc

Product Overview

Mini-Circuits' RMK-3-212+ frequency multiplier provides a multiplication factor of 3, converting input frequencies from 400 to 700 MHz into output frequencies from 1200 to 2100 MHz, supporting applications such as synthesizers, local oscillators, satellite up and down converters and more. The unit provides an input power range from +12 to +17 dBm, low conversion loss of 14 dB and good harmonic suppression. The multiplier comes housed in a miniature, surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

Feature	Advantages
Low conversion loss, 14 dB typ.	With a low conversion loss, the unit produces higher output power, reducing the need for amplification.
Very good harmonic suppression <ul style="list-style-type: none">• F2, 50 dBc• F4, 53 dBc	Reduces spurious signals and the need for additional filtering.
Wide bandwidth	With an output frequency range spanning 1200 to 2100 MHz, this multiplier covers a wide range of applications.
Wide input power range, +12 to +17 dBm	Wide input power signal range accommodates different input signal levels while still maintaining low conversion loss.
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size	Measuring only 0.25 x 0.31 x 0.16", the RMK-3-212+ saves space in crowded PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X3 Frequency Multiplier

50Ω Output 1200 to 2100 MHz

RMK-3-212+



Generic photo used for illustration purposes only
CASE STYLE: TT1224

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- broadband
- low conversion loss, 14 dB typ.
- high rejection F2, 50 dBc typ; F4, 53 dBc typ
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

Electrical Specifications at 25°C


Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		3		
Frequency Range, Input (F1)	400	—	700	MHz
Frequency Range, Output (F3)	1200	—	2100	MHz
Input Power	12	—	17	dBm
Conversion Loss		14	19	dB
Harmonic Output*	F1	-10	-1.4	—
	F2	33	50	—
	F4	30	53	—

* Harmonics of input frequency below the power level of F3

Typical Performance Data

Frequency		Conv. Loss (dB) F3	Harmonic Rejection Below F3, (dBc) at RF Input Power 17 dBm		
Input (MHz)	Output (MHz)		F1	F2	F4
400.00	1200.00	15.96	-6.10	-54.79	-54.66
420.00	1260.00	15.48	-5.64	-65.42	-56.75
450.00	1350.00	15.10	-4.87	-58.81	-57.48
500.00	1500.00	15.14	-3.10	-56.70	-60.08
540.00	1620.00	14.36	-2.26	-55.71	-59.08
600.00	1800.00	14.85	-0.09	-53.88	-55.14
620.00	1860.00	15.16	0.64	-52.35	-55.34
640.00	1920.00	14.68	1.07	-53.47	-53.53
660.00	1980.00	15.22	1.82	-53.78	-51.42
700.00	2100.00	14.91	2.75	-53.19	-50.71


Outline Drawing

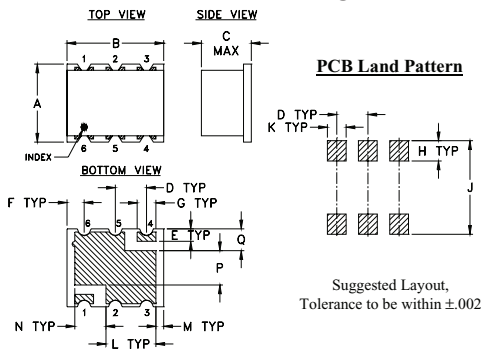

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.25	.31	.16	.100	.040	.055	.060	.065	
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65	
J	K	L	M	N	P	Q	wt.	
.300	.060	.160	.025	.100	.110	.070	grams	
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16	

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

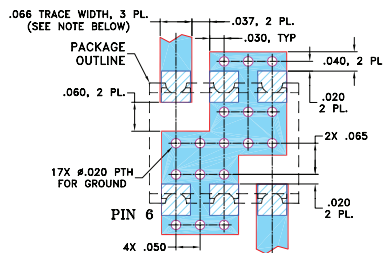

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

