

Ceramic Balun RF Transformer

50Ω 4900 to 5875 MHz 1:2 Ratio

BLGE2-542R+



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-9

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature*	-55°C to 100°C
Input RF Power	2W

*Refer to product storage temperature after installation.
Suggestion for T&R unused product storage condition: +5~+35°C,
Humidity 45~75%RH, 12 Month max.
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND) or DC Feed	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND Externally)	5


Outline Drawing

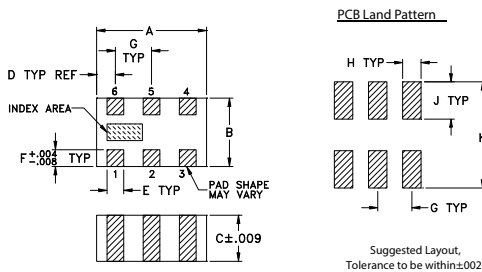

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.0	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

Evaluation Board MCL P/N: TB-BLGE2-542R+ Suggested PCB Layout (PL-264)

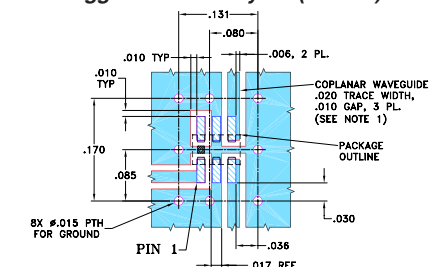

- NOTES:
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- COPLANAR WAVEGUIDE
.020 TRACE WIDTH
.010 GAP, 3 PL.
(SEE NOTE 1)
- PACKAGE OUTLINE
- 8X .015 PTH FOR GROUND
- PIN 1
- COPLANAR WAVEGUIDE
.010 TYP
.006, 2 PL.
.030
.036
.017 REF
- COPLANAR WAVEGUIDE
.010 TYP
.006, 2 PL.
.030
.036
.017 REF
- COPLANAR WAVEGUIDE
.010 TYP
.006, 2 PL.
.030
.036
.017 REF

Features

- low phase unbalance, 6.5 deg. and amplitude unbalance, 0.6 dB typ.
- miniature size 0805 (2.0x1.2 mm)
- LTCC construction
- low cost
- aqueous washable

Applications

- ISM Band
- WLAN/Wi-Fi
- Bluetooth

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			2		
Frequency Range		4900	—	5875	MHz
Insertion Loss*	4900 - 5875	—	0.8	2.0	dB
Amplitude Unbalance	4900 - 5875	—	0.6	2.0	dB
Phase Unbalance†	4900 - 5875	—	6.5	15	Degree
Unbalance Return Loss	4900 - 5875	6.7	14	—	dB




* Tested on Evaluation Board TB-BLGE2-542R+

† Relative to 180°


Typical Performance Data at 25°C**

FREQUENCY (GHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
4.90	1.02	10.14	0.87	11.83
5.00	0.95	10.73	0.77	11.19
5.10	0.90	11.36	0.70	10.50
5.20	0.84	12.12	0.66	9.80
5.30	0.79	12.89	0.58	8.78
5.40	0.76	13.69	0.59	8.02
5.50	0.74	14.56	0.61	7.04
5.60	0.73	15.04	0.66	6.00
5.70	0.73	15.14	0.76	4.90
5.80	0.76	15.15	0.92	3.24
5.875	0.79	14.83	1.12	2.34

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

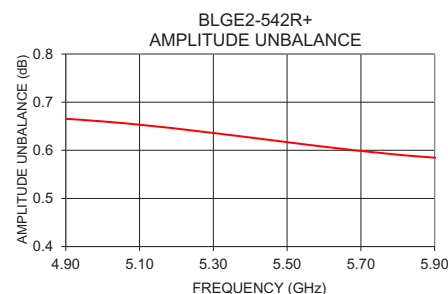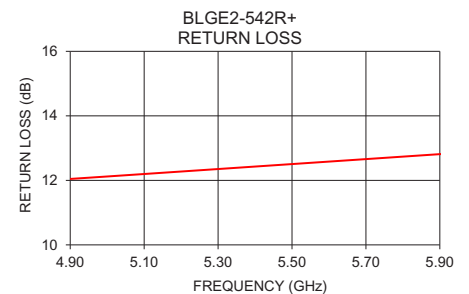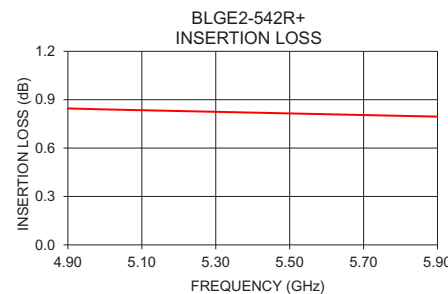

Configuration R

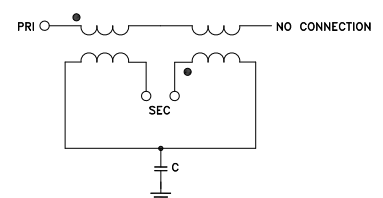

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M172548
BLGE2-542R+
AV/CP/AM
200918


Typical Performance Data

FREQUENCY (MHz)	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE ⁽¹⁾ (deg.)
4900	1.14	10.25	0.14	1.48
5000	1.09	10.70	0.01	1.35
5100	1.04	11.22	0.10	1.19
5200	1.00	11.79	0.20	0.96
5300	0.96	12.44	0.28	0.64
5400	0.92	13.19	0.35	0.25
5500	0.88	14.06	0.40	0.21
5600	0.84	15.05	0.43	0.71
5700	0.81	16.19	0.44	1.27
5800	0.79	17.41	0.43	1.91
5875	0.78	18.30	0.41	2.45


⁽¹⁾Relative to 180°

Typical Performance Data


Average Insertion Loss

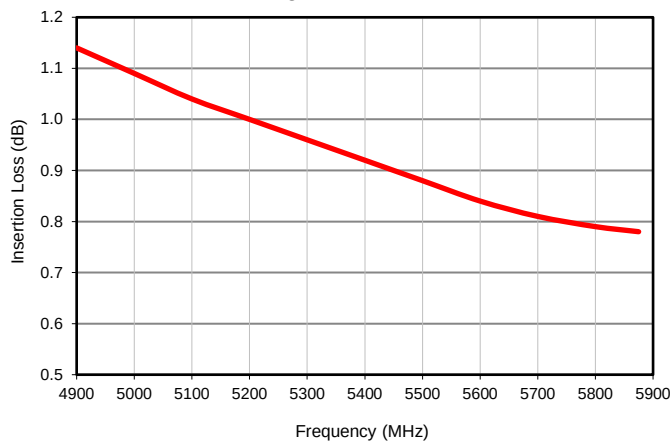


Input Return Loss

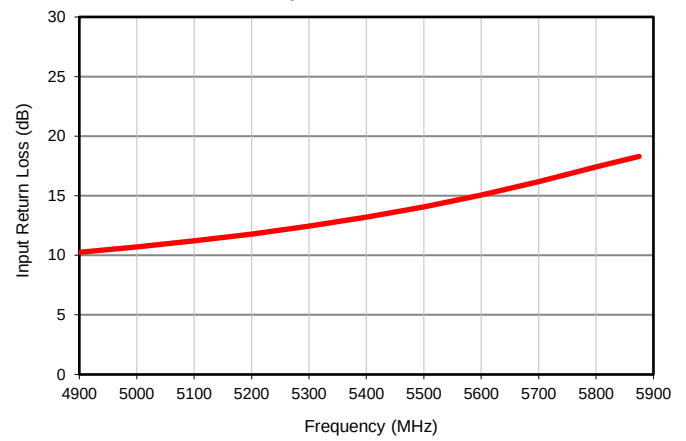


Amplitude Unbalance

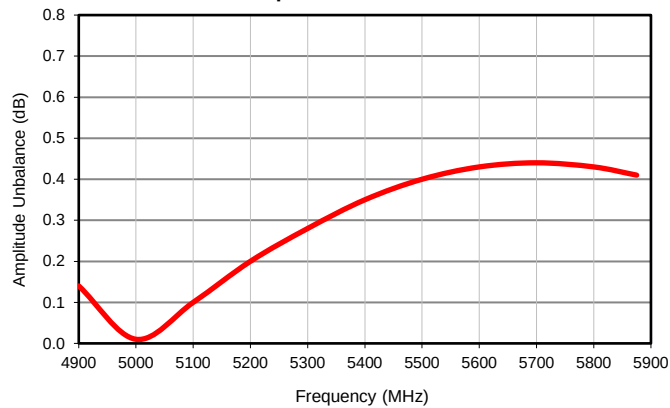


Phase Unbalance

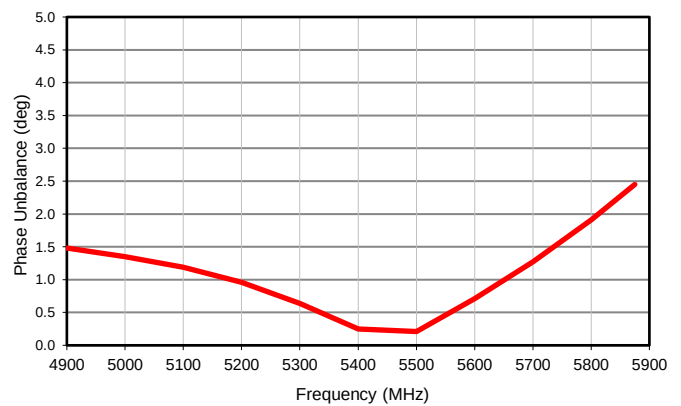

Outline Dimensions

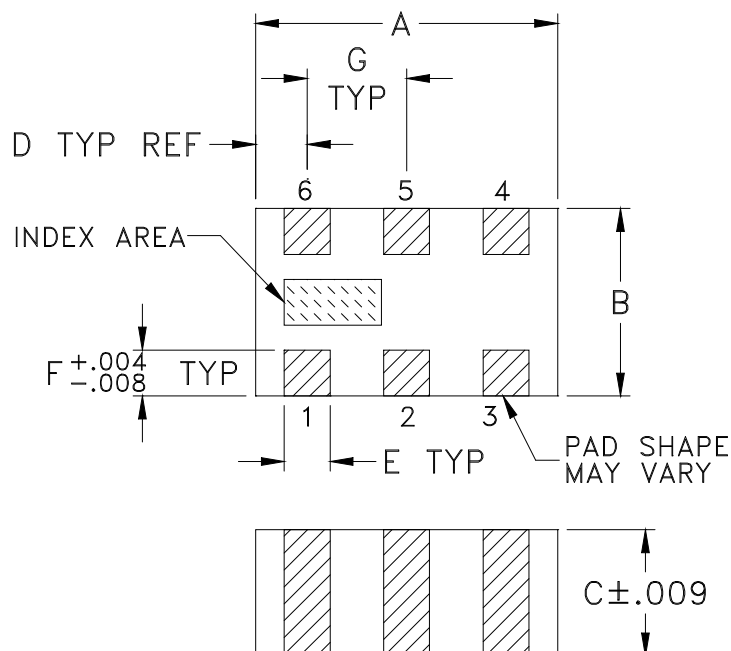

PCB Land Pattern

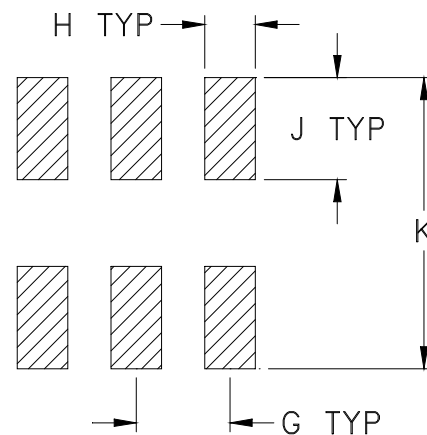

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT.GRAM
GE0805C-9	.079 (2.00)	.049 (1.25)	.037 (0.95)	.014 (0.35)	.012 (0.30)	.012 (0.30)	.026 (0.65)	.014 (0.35)	.039 (1.00)	.110 (2.80)	.008

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish: For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate over Nickel plate. All models, no (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R

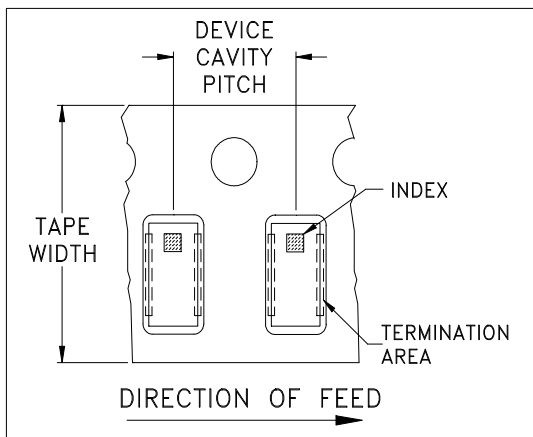


ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

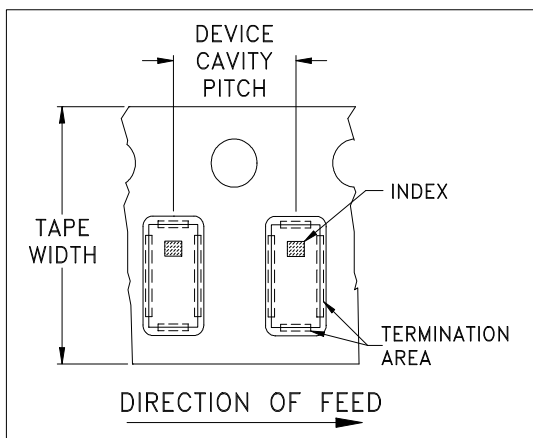


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	JV1210C-1
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION		REVISIONS				
		REV	ECN No.	DESCRIPTION	DATE	DR
		OR	M109549	NEW RELEASE	01/31/07	PW

**SUGGESTED MOUNTING CONFIGURATION
FOR GE0805C-1 CASE STYLE, "ry" PIN CONNECTION.**

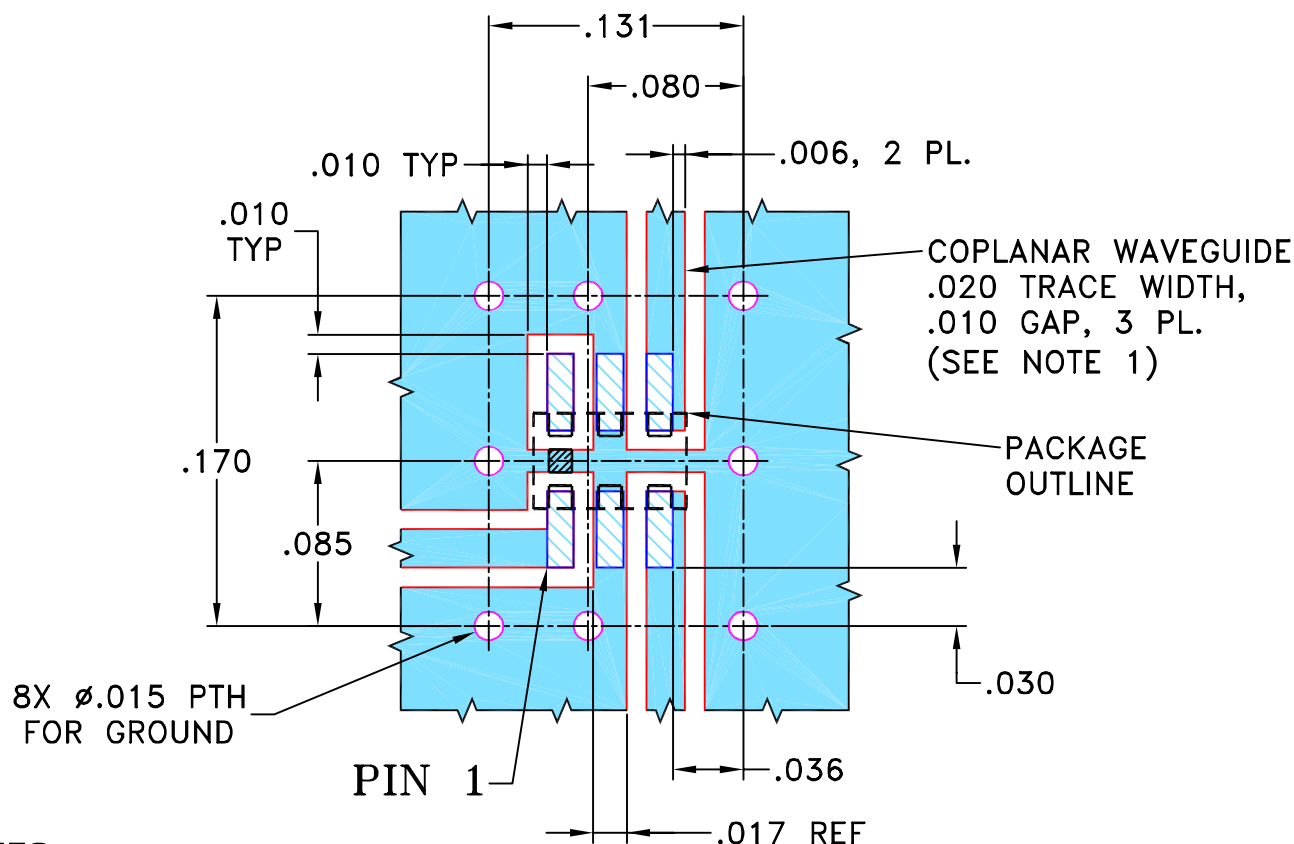


NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.





DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE		Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235			
DIMENSIONS ARE IN INCHES		DRAWN	PW	01/30/07		PL, ry, GE0805C-1, NCS, TB-419+			
TOLERANCES ON:		CHECKED	IL	01/31/07					
2 PL DECIMALS ±		APPROVED	DJ	01/31/07					
3 PL DECIMALS ± .005									
ANGLES ±									
FRACTIONS ±									
Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.									
ASHEETA1.DWG REV:A DATE:01/12/95									
SIZE A		CODE IDENT 15542		DRAWING NO: 98-PL-264		REV: OR			
FILE: 98PL264		SCALE: 10:1		SHEET: 1 OF 1					

Evaluation Board and Circuit

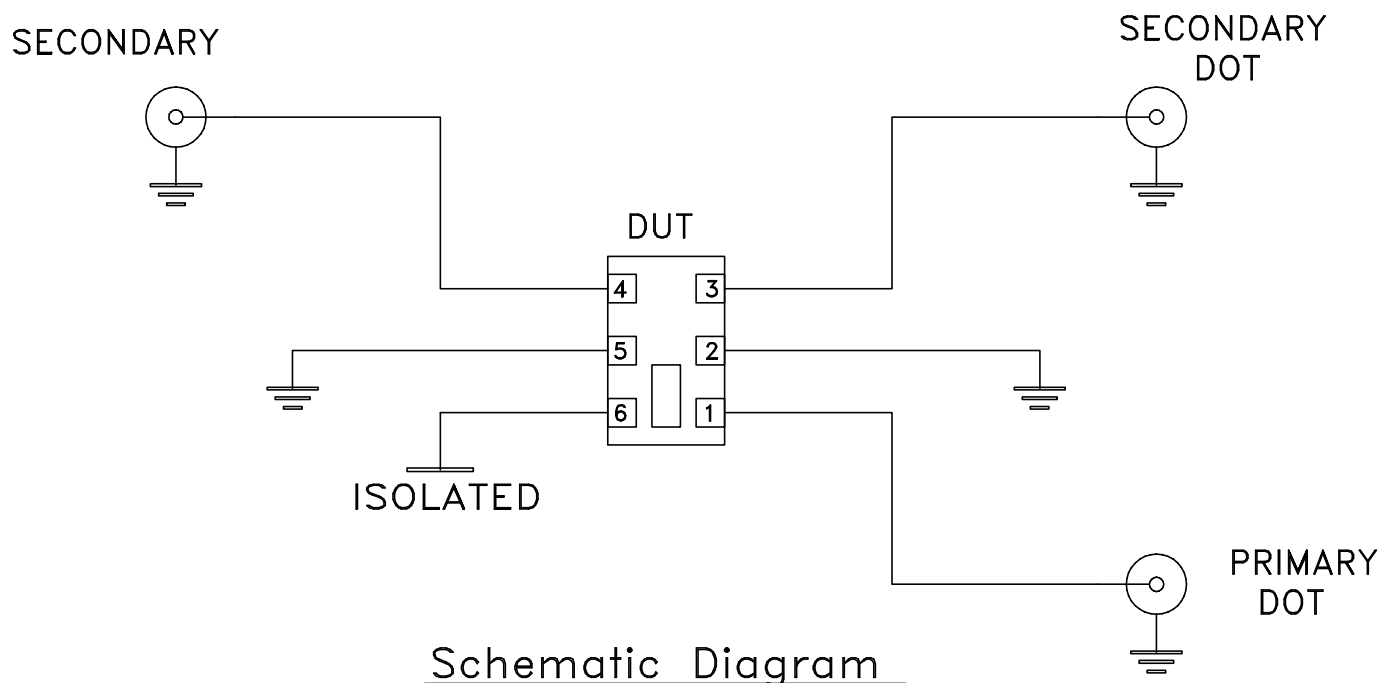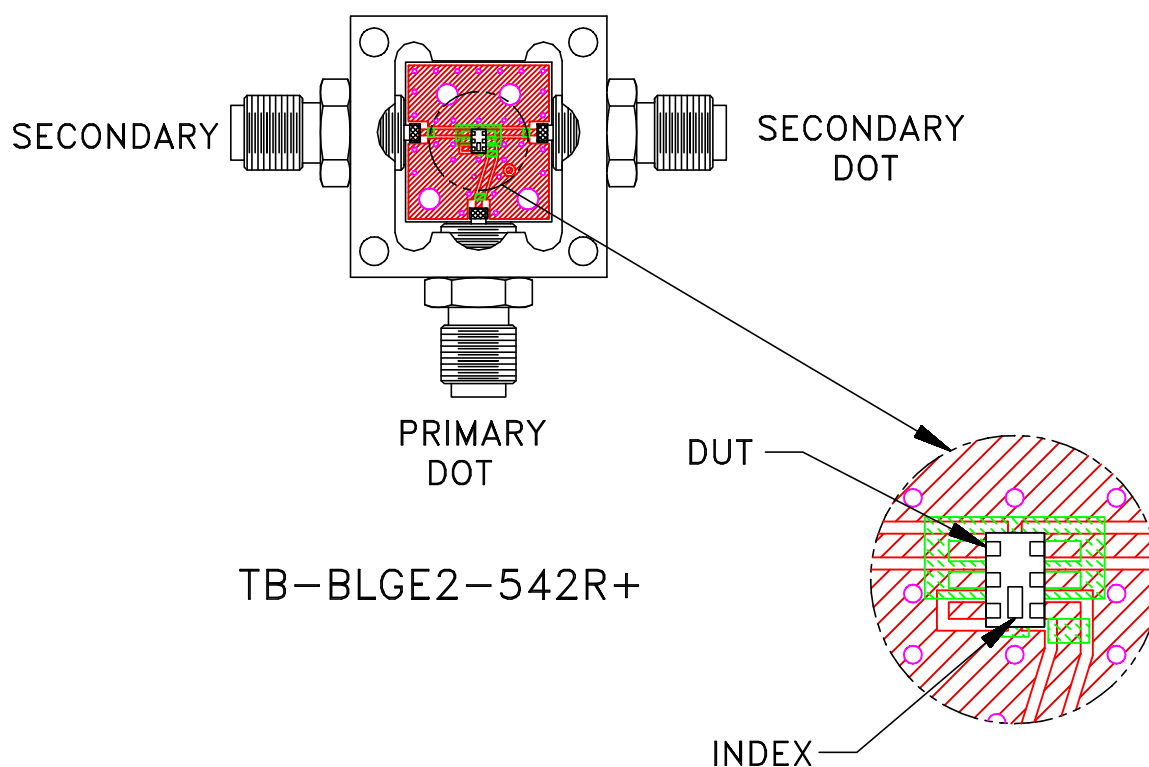

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A