

Surface Mount Phase Shifter

50Ω 180° Voltage Variable 300 to 400 MHz

JSPHS-42+



Generic photo used for illustration purposes only

CASE STYLE: BK276

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm max.
Control Voltage	20V


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

IN	14
OUT	8
BIAS	1,7^
GROUND	2,3,4,5,6,9,10,11,12,13

^ proper operation is achieved with pins 1 or 7 or both connected to BIAS.


Outline Drawing

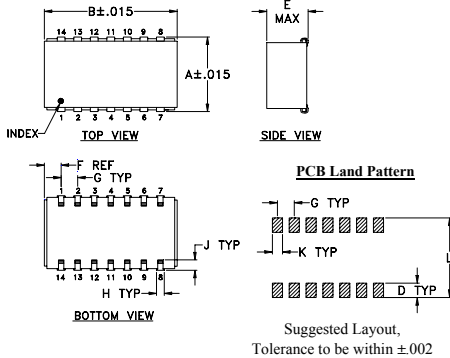

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.450	.803	--	.100	.250	.102	.100
11.43	20.40	--	2.54	6.35	2.59	2.54
H	J	K	L	wt		
.047	.065	.065	.470	grams		
1.19	1.65	1.65	11.94	3.0		

Demo Board MCL P/N: TB-152+ Suggested PCB Layout (PL-214)

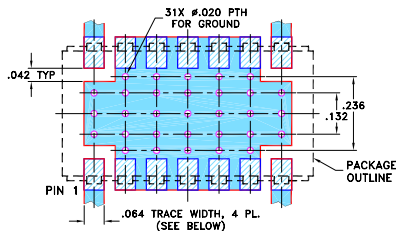

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 1.4 dB typ.
- good VSWR, 1.3:1 typ.
- J-leads for excellent solderability and strain relief
- aqueous washable

Applications

- signal processing

Phase Shifter Electrical Specifications




FREQUENCY (MHz)	PHASE RANGE (Degrees)	INSERTION LOSS (dB)		CONTROL VOLTAGE (V)	CONTROL BANDWIDTH (kHz)	VSWR (:1)	
	Min.	Typ.	Max.			Typ.	Max.
300-400	180	1.4	2.8	0-12	DC-50	1.3	1.9

Maximum operating power, 0 dBm


Typical Performance Data

Control Voltage (V)	Phase Shift* (Degrees)			VSWR (:1)			Insertion Loss (dB)		
	300 MHz	350 MHz	400 MHz	300 MHz	350 MHz	400 MHz	300 MHz	350 MHz	400 MHz
0.00	0.01	0.02	0.02	1.30	1.09	1.38	1.14	0.94	1.02
1.00	22.50	13.98	8.78	1.37	1.07	1.34	1.31	1.01	1.03
2.00	46.51	29.67	18.50	1.44	1.08	1.30	1.47	1.10	1.05
3.00	72.10	48.35	30.23	1.49	1.13	1.24	1.57	1.21	1.08
4.00	98.30	70.96	45.18	1.50	1.18	1.18	1.57	1.34	1.13
5.00	123.35	97.49	64.79	1.46	1.22	1.12	1.46	1.43	1.21
6.00	145.56	126.14	90.15	1.40	1.22	1.08	1.31	1.43	1.32
7.00	163.78	153.25	120.11	1.34	1.17	1.08	1.16	1.34	1.41
8.00	177.71	175.50	150.07	1.30	1.12	1.07	1.04	1.22	1.41
9.00	187.93	191.88	174.89	1.26	1.08	1.08	0.96	1.12	1.35
10.00	195.19	203.50	193.48	1.24	1.07	1.12	0.91	1.05	1.29
11.00	200.36	211.60	206.55	1.22	1.07	1.17	0.88	1.00	1.24
12.00	204.05	217.31	215.68	1.21	1.08	1.21	0.85	0.97	1.20

* Normalized at control voltage = 0V

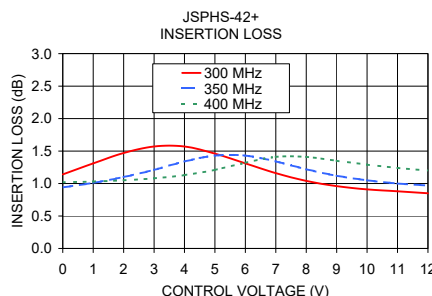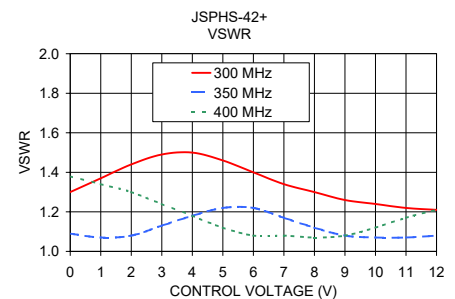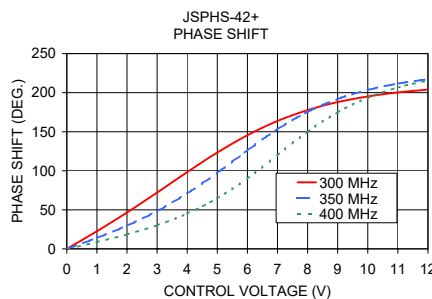

electrical schematic

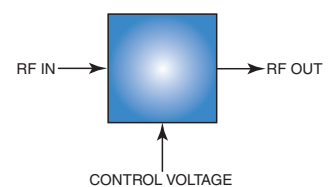

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
JSPHS-42+
ED-12108B/1
WZ/CP/AM
200428