

# Xtra Long Life SP4T Switch

## MSP4TA-18+

50Ω DC to 18 GHz, 24 Volt, Absorptive

### The Big Deal

- Extra long life - 10 million cycles
- Low insertion loss, 0.2 dB
- High isolation, 90 dB
- Absorptive
- Reliable sleep mode switching



CASE STYLE: HJ1768

### Product Overview

Mini-Circuits' MSP4TA-18+ is an ultra-reliable, rugged-duty absorptive fail-safe SP4T switch designed in break-before-make configuration offering an Ultra long switching life. Powered by +24VDC, the device has a typical switching speed of 20 milliseconds, insertion loss of 0.2 dB and high isolation of 90 dB. The MSP4TA-18+ is suitable for use across a wide range of applications, including switching for automated test equipment and redundancy switching.

### Key Features

Feature	Advantages
Extra long service life	Exceptionally long service life improves system reliability and reduces the need to replace switches often, making it ideal for automatic test systems.
High isolation, 90 dB typ.	Prevents interference from unwanted signals, ensuring signal integrity and accuracy of testing.
Reliable sleep-mode switching	Offers dependable performance even after being set at a fixed position for prolonged periods. Highly-reliable sleep mode switching averts failures due to "wake up," making it suitable for automatic testing as well as redundancy switching applications.
High repeatability between switching cycles	High repeatability of insertion loss between switching cycles ensures reliable performance critical for automated testing and other measurement applications.

# Xtra Long Life SP4T Switch

50Ω DC to 18 GHz, 24 Volt, Absorptive

## MSP4TA-18+

### Maximum Ratings

Operating Temperature	-15°C to +45°C
Storage Temperature	-15°C to +85°C
RF Power	20W
Control Voltage	26V

Permanent damage may occur if any of these limits are exceeded.

### Features

- ultra-reliable, 10 million cycles
- low insertion loss, 0.2 dB typ.
- high isolation, 90 dB typ
- break-before-make configuration
- absorptive fail-safe switch
- reliable "sleep-time" switching
- protected by US Patents 5,272,458; 6,414,577; 7,633,361; 7,843,289 and 6,650,210

### Applications

- (ATE) automatic test equipment
- redundancy switching for microwave radio




front view back view  
CASE STYLE: HJ1768  
Connectors Model  
SMA MSP4TA-18+

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

HT-Series  
Tight Spot  
SMA Wrench  
From \$24.95  
[Click Here](#)

### Outline Drawing

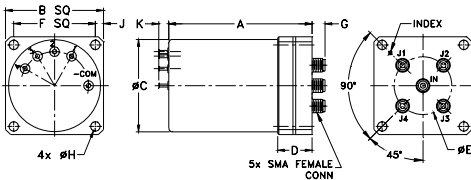

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
2.63	1.80	1.70	.63	1.06	1.500
66.80	45.72	43.18	16.00	26.92	38.10
G	H	J	K	wt	
.24	.172	.15	.19	grams	
6.10	4.37	3.81	4.83	160	

### Electrical Specifications at 25°C

Parameter	Condition	Min.	Typ. (Note 1)	Max.	Unit
Frequency Range		DC	—	18	GHz
Insertion Loss	DC - 1 GHz	—	0.10	0.20	dB
	1 - 8	—	0.15	0.30	
	8 - 12	—	0.25	0.40	
	12 - 18	—	0.50	0.80	
Isolation	DC - 1 GHz	85	105	—	dB
	1 - 8	80	100	—	
	8 - 12	75	95	—	
	12 - 18	60	80	—	
VSWR (Note 2,3)	DC - 1 GHz	—	1.05	1.10	:1
	1 - 8	—	1.20	1.40	
	8 - 12	—	1.20	1.40	
	12 - 18	—	1.30	1.60	
Control Signal (Note 4)	24V	—	85	125	mA
Switching Lifetime Hot Switching	0.1W	10 million	—	—	cycles
	1.0W	—	1 million	—	
RF Power Cold Switching	—	—	—	20	W


#### Notes

1. The performance values represents a common value for the frequency range. For typical performance across the frequency band, see performance graphs in the next page.
2. All ports, all states
3. For port IN in Energized state only.
4. +24 Volt applied to energized port, COM is negative.


### Additional Specifications

Operating Voltage Range	24V (nom) ±0.5V
Switching Time (Typ.)	20ms

### Marking Drawing




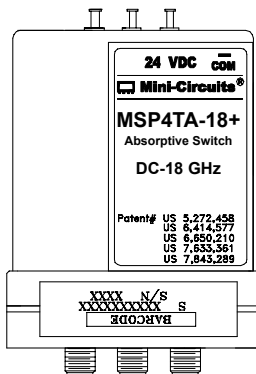


### Switching Position (Non-Energized)

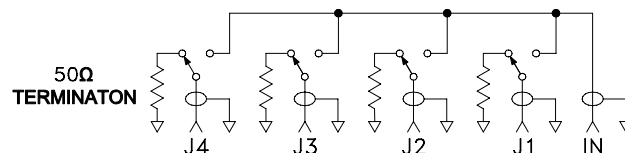

## Typical Performance Data

FREQ. (MHz)	ON INSERTION LOSS (dB)				ISOLATION (dB)				VSWR					
	IN-J1	IN-J2	IN-J3	IN-J4	IN	J1-ON	J2-ON	J3-ON	J4-ON	J1-OFF	J2-OFF	J3-OFF	J4-OFF	
500	0.03	0.04	0.03	0.04	99.27	1.01	1.01	1.00	1.00	1.00	1.02	1.02	1.01	1.01
1000	0.03	0.04	0.04	0.04	106.89	1.02	1.02	1.01	1.01	1.01	1.03	1.02	1.01	1.02
2050	0.05	0.05	0.06	0.06	107.43	1.03	1.03	1.03	1.02	1.03	1.05	1.03	1.03	1.03
3100	0.06	0.07	0.07	0.08	106.24	1.06	1.06	1.08	1.08	1.07	1.10	1.05	1.06	1.07
4150	0.08	0.10	0.10	0.10	107.40	1.11	1.12	1.14	1.14	1.12	1.13	1.08	1.11	1.10
5200	0.11	0.12	0.14	0.13	108.76	1.16	1.17	1.18	1.21	1.16	1.14	1.09	1.14	1.11
6250	0.13	0.14	0.16	0.15	104.65	1.19	1.19	1.20	1.25	1.18	1.12	1.09	1.14	1.11
7300	0.14	0.16	0.18	0.17	104.41	1.21	1.19	1.19	1.24	1.17	1.07	1.06	1.10	1.08
8000	0.15	0.17	0.18	0.18	103.35	1.21	1.18	1.18	1.22	1.16	1.04	1.04	1.06	1.04
9000	0.15	0.19	0.17	0.18	105.69	1.20	1.18	1.17	1.20	1.13	1.03	1.04	1.03	1.03
10000	0.16	0.21	0.17	0.20	106.75	1.20	1.18	1.18	1.19	1.14	1.06	1.04	1.08	1.07
12000	0.17	0.24	0.21	0.28	102.29	1.22	1.18	1.19	1.25	1.16	1.14	1.08	1.11	1.14
14000	0.21	0.31	0.25	0.37	96.97	1.32	1.24	1.29	1.29	1.26	1.13	1.06	1.11	1.11
16000	0.32	0.42	0.30	0.44	95.38	1.45	1.37	1.40	1.36	1.36	1.05	1.07	1.05	1.01
18000	0.34	0.48	0.33	0.51	90.58	1.36	1.31	1.31	1.35	1.33	1.25	1.20	1.25	1.19

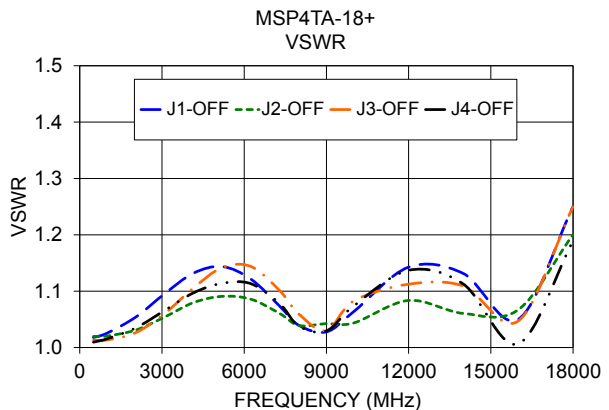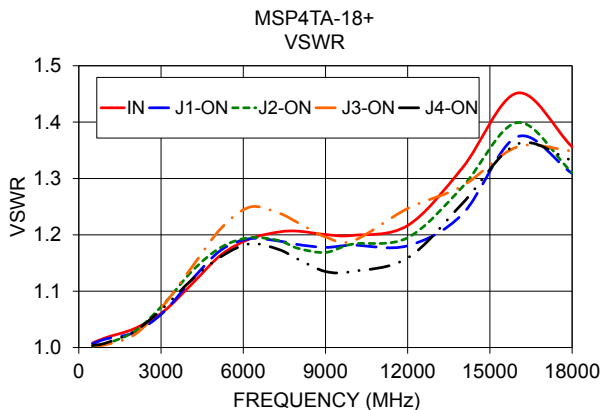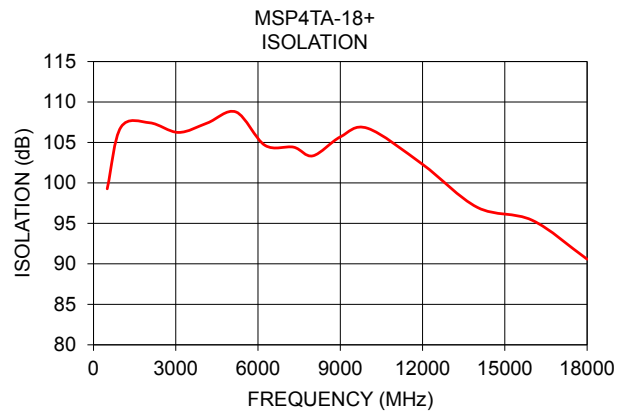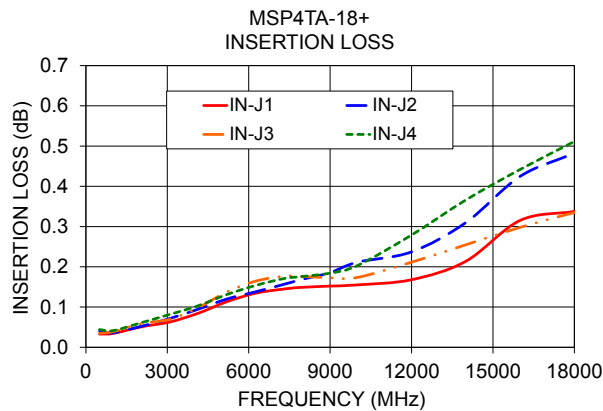

### Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)