

# Cavity Bandpass Filters

50Ω DC to 27.125 GHz



## The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 27.125 GHz
- Stopbands up to 37 GHz

## Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

## ZVBP-10R7G-S+

50Ω 10450 to 10950 MHz



Generic photo used for illustration purposes only

CASE STYLE: UY3145

Connectors SMA-F Model ZVBP-10R7G-S+

### Features

- Low insertion loss, 0.6 dB typ.
- Broad stopband up to 20 GHz.
- High rejection, 67dB typ.
- Good VSWR, 1.2:1 typ.

### Applications

- Satellite communication
- Mobile communication
- Radiolocation
- Space research
- Radio Astronomy

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	Fc	-	10700	-	MHz
	Insertion Loss	F1-F2	10450 - 10950	0.6	1.0	dB
	VSWR	F1-F2	10450 - 10950	1.2	1.5	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 9300	60	66	dB
Stop Band, Upper	Insertion Loss	F4-F5	12300 - 20000	60	67	dB

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	10W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

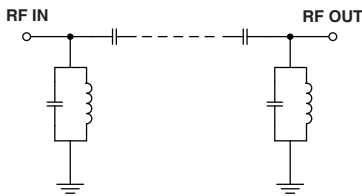

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
100	84.89	1767.02	10450	2.14
500	115.61	208.84	10480	2.01
3000	110.27	311.17	10510	1.92
9300	67.60	161.65	10550	1.82
10065	30.28	104.84	10580	1.77
10180	20.03	67.59	10600	1.75
10265	10.39	21.92	10630	1.72
10330	3.01	4.30	10650	1.71
10450	0.42	1.09	10680	1.70
10600	0.39	1.16	10700	1.70
10700	0.36	1.04	10720	1.70
10800	0.38	1.12	10740	1.70
10950	0.42	1.11	10760	1.70
11080	3.17	4.58	10780	1.71
11145	10.13	21.92	10800	1.72
11240	20.11	80.47	10830	1.76
11365	30.28	111.17	10860	1.80
12300	68.46	164.85	10890	1.86
15000	95.88	169.12	10920	1.93
20000	90.79	71.09	10950	2.05

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

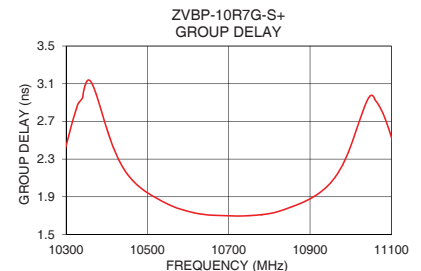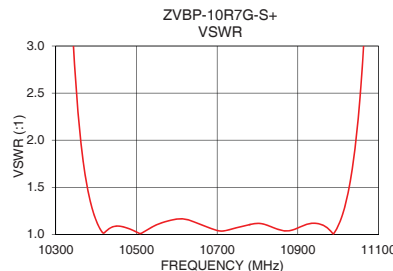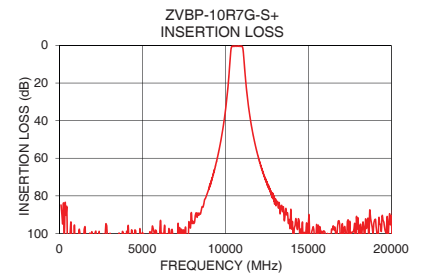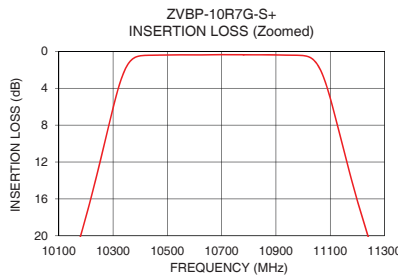

#### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Coaxial Connections

PORT-1	SMA-Female
PORT-2	SMA-Female

## Outline Drawing

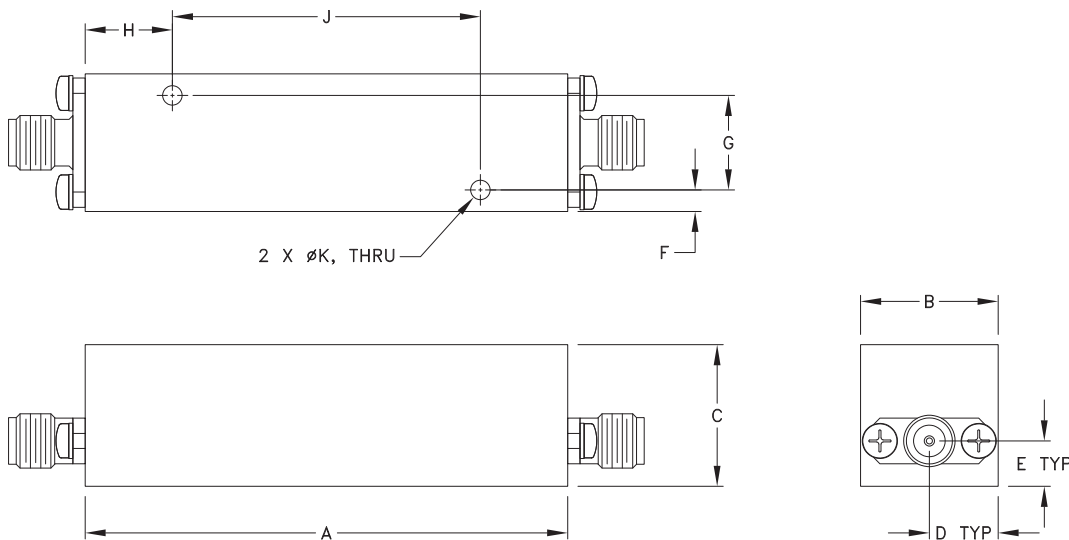

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

A	B	C	D	E	F
<b>2.35</b>	<b>.67</b>	<b>.69</b>	<b>.34</b>	<b>.22</b>	<b>.11</b>
59.7	17.0	17.5	8.5	5.6	2.7
G	H	J	K	Wt.	
<b>.460</b>	<b>.43</b>	<b>1.500</b>	<b>.095</b>	grams	
11.68	10.8	38.10	2.41	<b>130</b>	

Note: Please refer to case style drawing for details

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)