



Coaxial Cable

141 SMRSM Model Series

50Ω DC to 18 GHz



CASE STYLE: KQ1612-XX

XX= cable length in inches

The Big Deal

- Hand formable with tight bend radius
- 18 GHz Right-Angle connector
- Excellent Return Loss and Insertion Loss
- Ideal for interconnect of assembled systems

Product Overview

The 141 Series Hand-Flex Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body and Silver Plated Copper Steel center conductor.

Key Features

Feature	Advantages
Hand-Formable RF Cables	The 141 Series Hand-Flex cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 8mm bend radius, the 141 Hand Flex series is able to make connections in tight spaces making these cables ideal for dense system integration.
18 GHz Right-Angle Connector	Using a custom right-angle connector, the 141 SMRSM Series is able to meet system requirements of 90° connections without bending and sacrificing high frequency performance up to 18 GHz.
Excellent Return loss	Supporting typical return loss of 26 dB to 6 GHz and 19 dB to 18 GHz, the 141 Series Hand-Flex Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: • 546W at 0.5 GHz • 90W at 18 GHz	Mini-Circuits 141 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. (power rating is at sea-level altitudes)
Built in Anti-torque nut	Mini-Circuits 141 Series Hand Flex cables include an anti-torque feature to support the straight SMA connector body during installation alleviating risk of stress to the connector/cable interface.
Jacketed and Unjacketed options	Standard 141 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. Un-jacketed versions are available upon request.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Cable


50Ω 6 inch DC to 18 GHz

Maximum Ratings

Operating Temperature	-55°C to 105°C
Storage Temperature	-55°C to 105°C
Power Handling at 25°C, Sea Level	546W at 0.5 GHz 387W at 1 GHz 273W at 2 GHz 156W at 6 GHz 121W at 10 GHz 90W at 18 GHz

Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

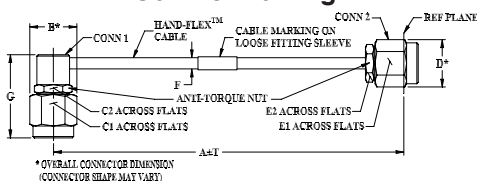

Outline Dimensions (inch mm)

A	B	C1	C2	D	E1
6.0	.36	.313	.250	.36	.313
152.40	9.14	7.95	6.35	9.14	7.95
E2	F	G	T	wt	
.250	.141±.003 .163±.004	.728±.02	.05	grams	
6.35	(3.58±0.07) (4.14±0.10)	18.50±0.5	1.27	12.26	

Cable Construction

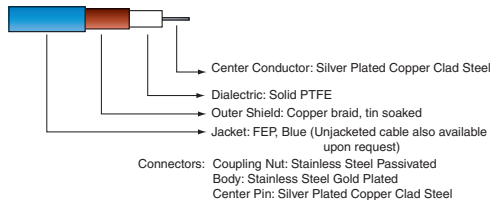

Features

- Right-Angle connection capable of DC to 18 GHz
- Low Loss, 0.50 dB at 18 GHz
- Excellent Return Loss, 20 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 8mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard¹
- **Ideal for interconnect of assembled systems**

Applications

- Replacement for custom bent 0.141" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

141-6SMRSM+



CASE STYLE: KQ1612-6

Connectors	Model ¹
Conn1	Conn2
Right Angle SMA-Male	SMA-Male 141-6SMRSM+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C



Parameter	Condition (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC		18	GHz
Length ²			6		inches
Insertion Loss	DC - 2	—	0.19	0.4	dB
	2 - 6	—	0.27	0.6	
	6 - 10	—	0.34	0.8	
	10 - 18	—	0.50	1.1	
Return Loss	DC - 2	20	35	—	dB
	2 - 6	20	29	—	
	6 - 10	16	27	—	
	10 - 18	16	20	—	

1. Unjacketed cable also available upon request.

2. Custom sizes available, consult factory.

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
		SMA-Male Right Angle SMA-Male
10.0	0.00	49.0 48.9
1000.0	0.07	35.1 34.6
1800.0	0.10	35.2 35.2
2400.0	0.12	36.8 36.4
4000.0	0.15	44.8 48.5
5000.0	0.17	34.0 33.0
6000.0	0.20	39.3 40.1
7000.0	0.22	29.8 28.9
8000.0	0.24	30.1 28.8
9000.0	0.26	33.2 31.0
10000.0	0.28	31.0 30.7
12000.0	0.33	28.3 33.8
14000.0	0.37	31.1 32.1
16000.0	0.47	24.6 23.9
18000.0	0.49	22.9 23.5

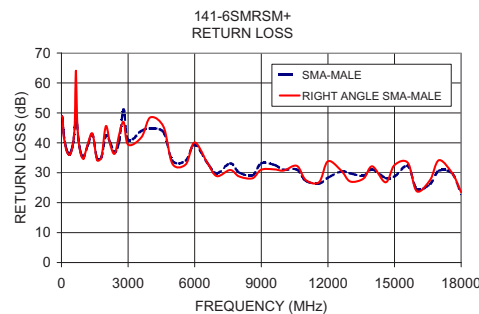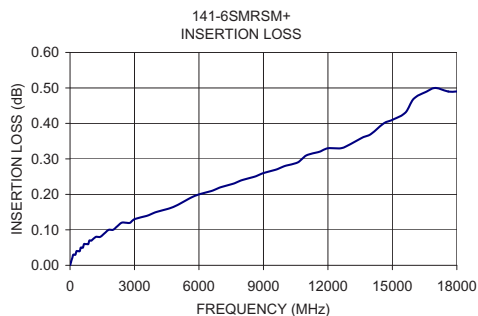

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Proper Cable Connection Using Anti-Torque Nut

Mini-Circuits 141-series HandFlex™ interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torqueing and twisting when tightening the cable connector.


To properly tighten the cable connector:

- 1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

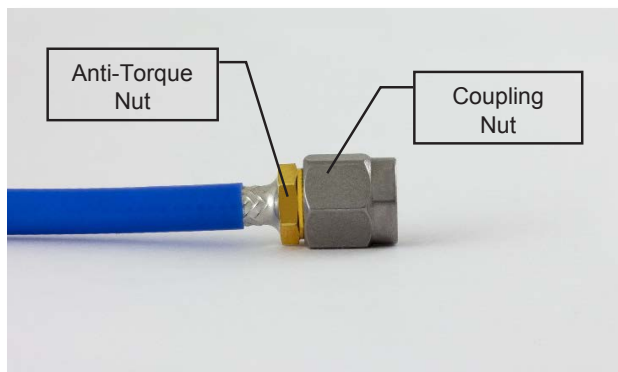

- 2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

- 3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

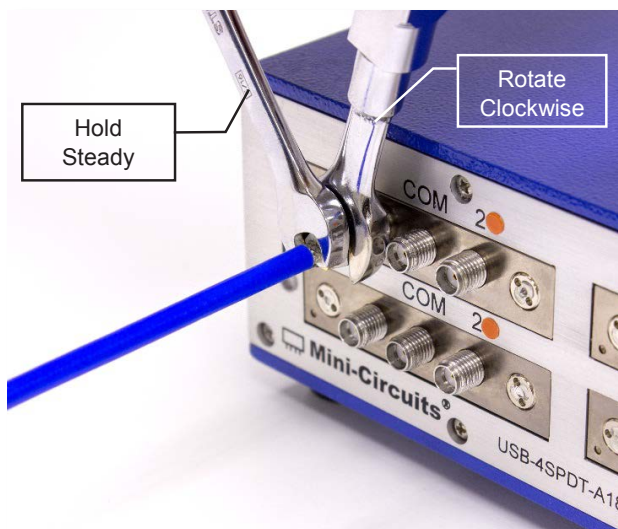

***NOTE:** Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torqueing the connector.

Notes



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-MALE RETURN LOSS (dB)	RIGHT ANGLE SMA-MALE RETURN LOSS (dB)
10.0	0.00	49.0	48.9
50.0	0.01	47.7	48.6
100.0	0.02	43.2	42.3
150.0	0.03	40.4	40.3
200.0	0.03	38.6	38.0
250.0	0.03	37.3	37.0
300.0	0.04	36.5	36.3
350.0	0.04	36.3	35.9
400.0	0.04	36.6	36.2
450.0	0.04	37.5	37.2
500.0	0.05	38.9	38.7
550.0	0.05	41.2	41.4
600.0	0.05	45.2	46.5
650.0	0.06	48.9	64.1
700.0	0.06	46.5	48.6
750.0	0.06	42.2	42.3
800.0	0.06	39.2	38.9
850.0	0.06	37.3	37.0
900.0	0.07	35.9	35.5
950.0	0.07	35.3	34.9
1000.0	0.07	35.1	34.6
1200.0	0.08	39.5	40.0
1400.0	0.08	42.7	43.0
1600.0	0.09	34.7	34.2
1800.0	0.10	35.2	35.2
2000.0	0.10	42.4	45.6
2200.0	0.11	39.9	39.2
2400.0	0.12	36.8	36.4
2600.0	0.12	40.6	42.9
2800.0	0.12	51.1	46.9
3000.0	0.13	40.9	39.4
3600.0	0.14	44.0	41.9
4000.0	0.15	44.8	48.5
4600.0	0.16	43.5	45.3
5000.0	0.17	34.0	33.0
5600.0	0.19	34.1	32.8
6000.0	0.20	39.3	40.1
6600.0	0.21	32.9	32.9
7000.0	0.22	29.8	28.9
7600.0	0.23	33.1	30.9
8000.0	0.24	30.1	28.8
8600.0	0.25	29.1	28.1
9000.0	0.26	33.2	31.0
9600.0	0.27	32.6	31.1
10000.0	0.28	31.0	30.7
10600.0	0.29	31.1	32.3
11000.0	0.31	27.3	27.6
11600.0	0.32	26.4	26.9
12000.0	0.33	28.3	33.8
12600.0	0.33	30.4	30.7
13000.0	0.34	29.8	27.1
13600.0	0.36	29.0	28.0
14000.0	0.37	31.1	32.1
14600.0	0.40	28.2	26.8
15000.0	0.41	28.8	32.6
15600.0	0.43	32.2	33.3
16000.0	0.47	24.6	23.9
16600.0	0.49	26.2	27.6
17000.0	0.50	30.7	34.2
17600.0	0.49	29.7	29.8
18000.0	0.49	22.9	23.5

Typical Performance Curves

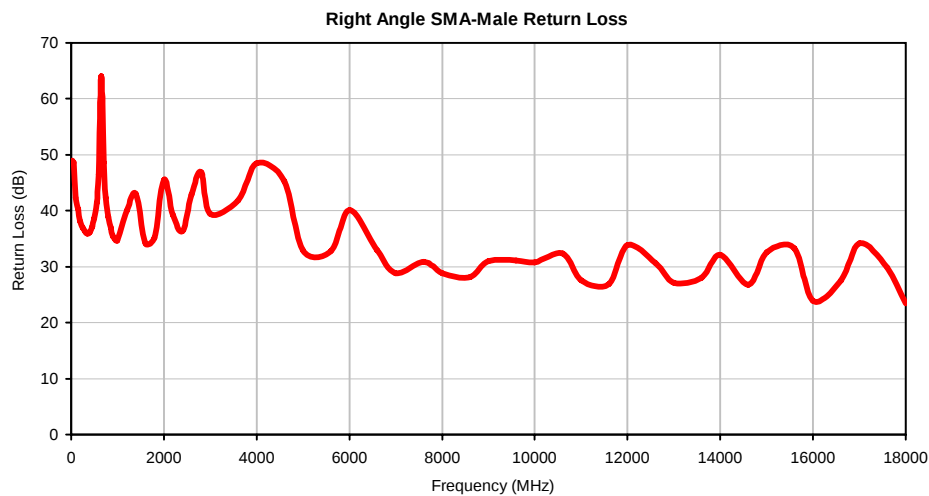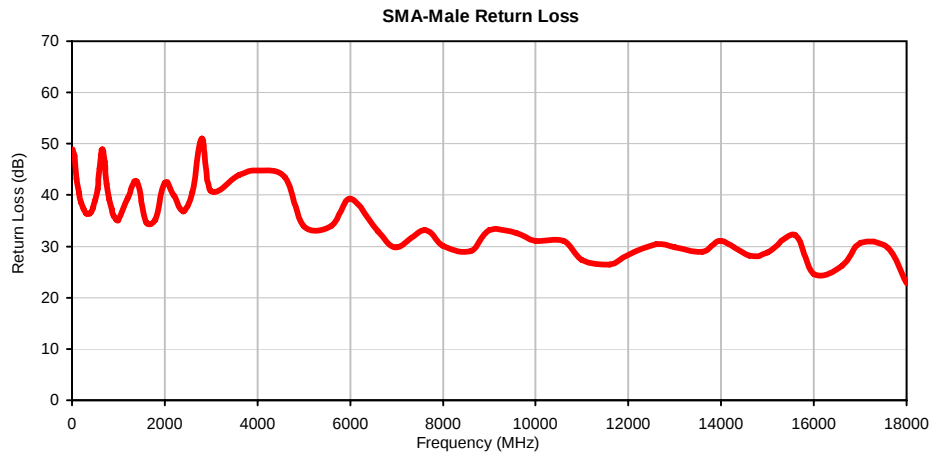

Outline Dimensions

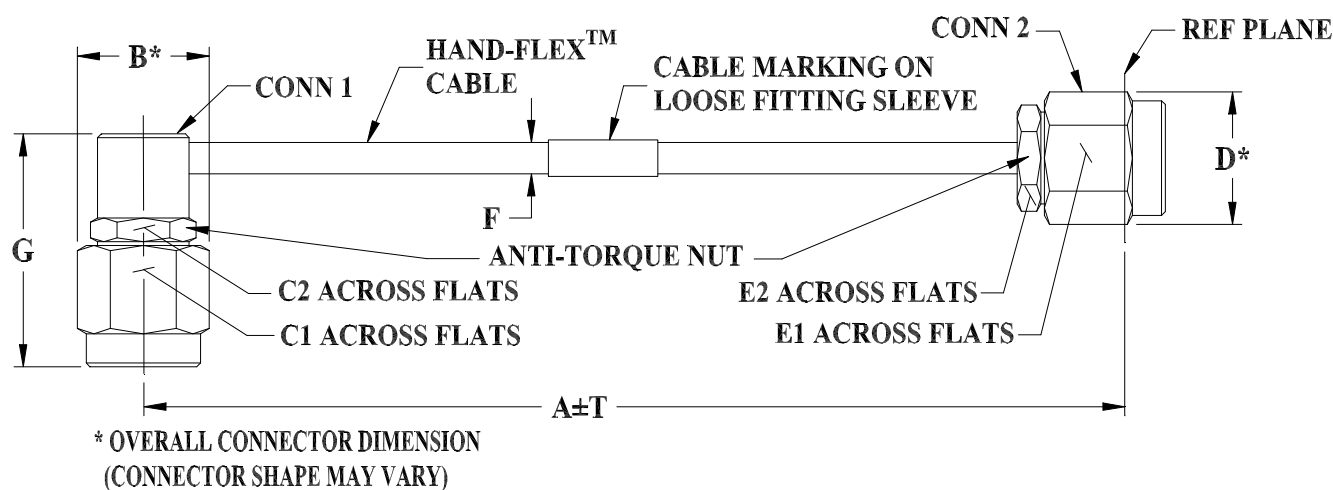

KQ1612 SERIES
RIGHT ANGLE SMA MALE (CONN-1)
SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		G	H	T		WEIGHT GRAMS +/- 2gms
	INCH	MM							141U- ASMRSM+	141- ASMRSM+			INCH	MM	
KQ1612-3	3.00	76.20	.36 (9.14)	.313 (7.95)	.250 (6.35)	.36 (9.14)	.313 (7.95)	.250 (6.35)	.141±.003 (3.58±0.07)	.163±.004 (4.14±0.10)	.728±.020 (18.50±0.50)	-- --	.05	1.27	10.13
KQ1612-4	4.00	101.60											.05	1.27	11.27
KQ1612-5	5.00	127.00											.05	1.27	12.42
KQ1612-.5.5	5.50	139.70											.05	1.27	12.99
KQ1612-6	6.00	152.40											.05	1.27	13.56
KQ1612-7	7.00	177.80											.10	2.54	14.70
KQ1612-8	8.00	203.20											.10	2.54	15.84
KQ1612-9	9.00	228.60											.10	2.54	16.99
KQ1612-10	10.00	254.00											.10	2.54	18.13
KQ1612-11	11.00	279.40											.10	2.54	19.27
KQ1612-12	12.00	304.80											.10	2.54	20.42
KQ1612-13	13.00	330.20											.15	3.81	21.56
KQ1612-14	14.00	355.60											.15	3.81	22.70

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. 141 Hand-Flex™ Coaxial Cable.
2. "A" represents length of cable.



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

Outline Dimensions

KQ1612 SERIES
RIGHT ANGLE SMA MALE (CONN-1)
SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		G	H	T		WEIGHT GRAMS +/- 2gms
	INCH	MM							141U- ASMRSM+	141- ASMRSM+			INCH	MM	
KQ1612-15	15.00	381.00	.36 (9.14)	.313 (7.95)	.250 (6.35)	.36 (9.14)	.313 (7.95)	.250 (6.35)	.141 $\pm$.003 (3.58 $\pm$ 0.07)	.163 $\pm$.004 (4.14 $\pm$ 0.10)	.728 $\pm$.020 (18.50 $\pm$ 0.50)	-- --	.15	3.81	23.85
KQ1612-16	16.00	406.40											.15	3.81	24.99
KQ1612-17	17.00	431.80											.15	3.81	26.13
KQ1612-18	18.00	457.20											.15	3.81	27.27
KQ1612-20	20.00	508.00											.15	3.81	29.56
KQ1612-24	24.00	609.60											.15	3.81	34.13
KQ1612-32	32.00	812.80											.20	5.08	43.28
KQ1612-36	36.00	914.40											.20	5.08	47.85

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. $\pm$.03; 3Pl. $\pm$.015



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	