

Frequency Mixer

ADE-12MH

Level 13 (LO Power +13 dBm) 10 to 1200 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

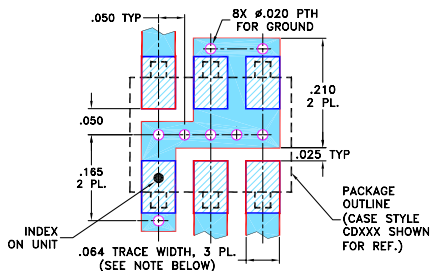Demo Board MCL P/N: TB-03
Suggested PCB Layout (PL-052)

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.3 dB typ.
- good L-R isolation, 45 dB typ.;
- L-I isolation, 42 dB typ.
- low profile package
- aqueous washable
- protected by U.S. Patent 6,133,525

Applications

- cellular
- VHF/UHF receivers



Generic photo used for illustration purposes only

CASE STYLE: CD542

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)
		L	M	U	L	M	U	
LO/RF f_L - f_U	Mid-Band m $\bar{X}$ σ Max.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ.
10-1200 DC-1200	6.3 0.10 8.0 8.5	62 45	45 32	40 26	68 40	42 27	30 20	22


1 dB COMP.: +9 dBm typ.







L = low range [f_L to $10 f_L$]
m = mid band [$2f_L$ to $f_U/2$]M = mid range [$10 f_L$ to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
10.00	40.00	6.42	66.67	60.68	1.54	1.59
15.00	45.00	6.45	65.33	59.84	1.52	1.59
20.00	50.00	6.41	64.50	59.34	1.54	1.56
40.00	70.00	6.40	62.00	56.67	1.55	1.52
70.00	100.00	6.50	58.50	54.67	1.52	1.46
105.74	135.74	6.48	56.16	53.17	1.54	1.48
150.00	180.00	6.56	53.49	52.50	1.56	1.50
210.97	240.97	6.44	51.17	55.51	1.56	1.50
316.21	346.21	6.49	48.50	49.00	1.61	1.50
421.45	451.45	6.61	47.17	44.16	1.62	1.49
526.68	556.68	6.63	45.33	39.67	1.65	1.51
570.00	600.00	6.78	44.67	38.33	1.74	1.56
600.00	630.00	6.77	44.67	38.01	1.73	1.54
737.16	767.16	7.05	45.33	37.17	1.77	1.49
842.40	872.40	7.74	43.17	35.66	1.95	1.46
947.63	977.63	6.98	40.83	32.34	2.07	1.45
1000.00	1030.00	6.54	40.33	30.99	2.10	1.36
1052.87	1082.87	6.37	39.50	29.83	2.13	1.28
1170.00	1200.00	6.60	37.67	29.34	2.28	1.12
1200.00	1230.00	6.70	37.00	29.34	2.41	1.09

Electrical Schematic

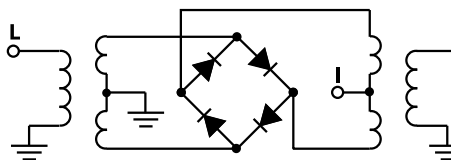

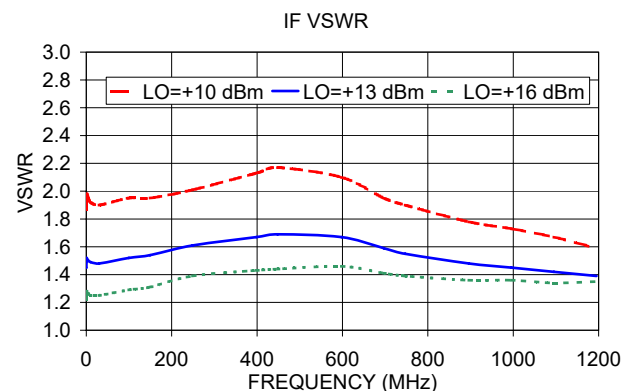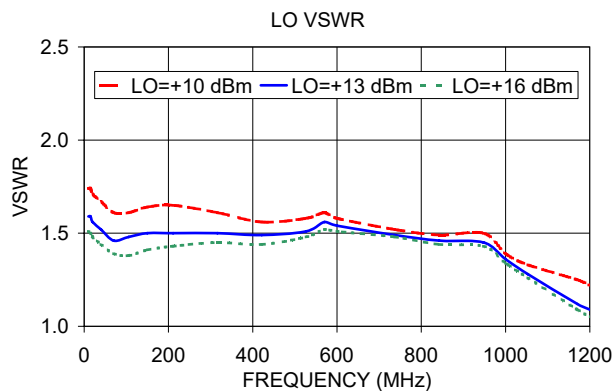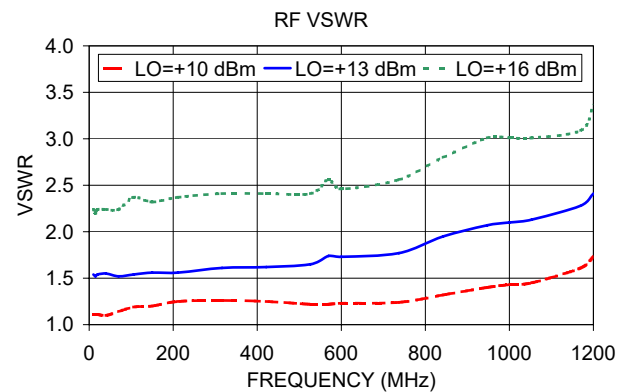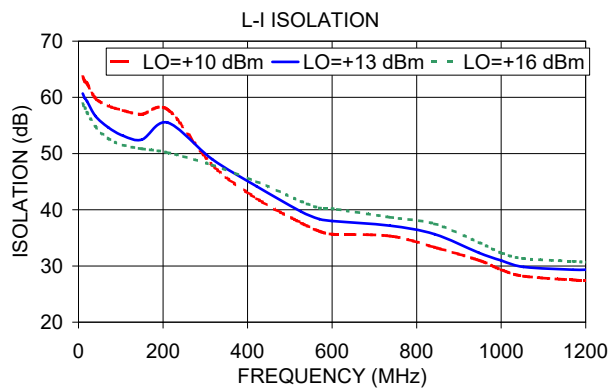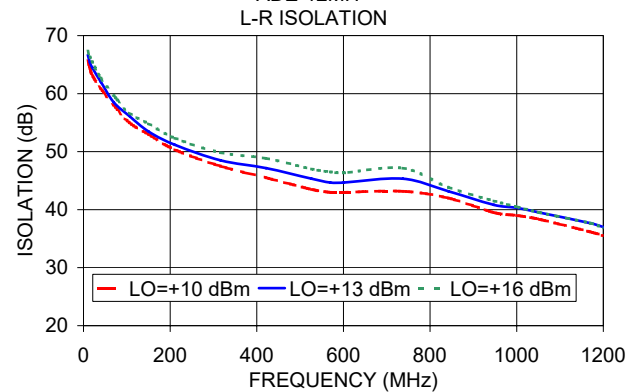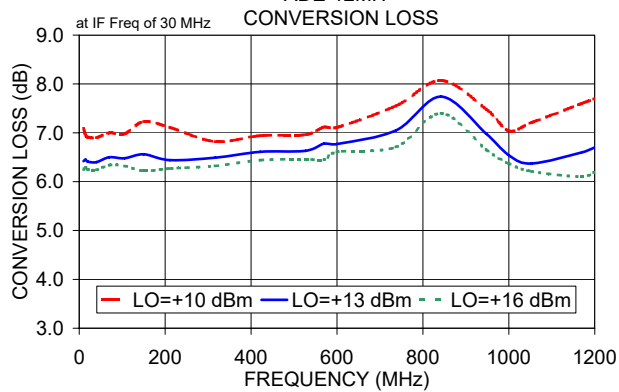

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADE-12MH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	7.07	6.52	6.24
50.3	80.3	7.34	6.80	6.53
90.5	120.5	7.37	6.78	6.49
130.8	160.8	7.32	6.71	6.45
171.0	201.0	7.25	6.68	6.45
211.2	241.2	7.15	6.62	6.44
251.4	281.4	7.10	6.65	6.45
291.7	321.7	7.04	6.61	6.46
331.9	361.9	6.98	6.63	6.44
372.1	402.1	6.98	6.60	6.46
412.3	442.3	6.90	6.58	6.40
452.6	482.6	6.95	6.59	6.41
492.8	522.8	6.89	6.51	6.31
533.0	563.0	6.89	6.53	6.31
573.2	603.2	6.88	6.54	6.35
613.5	643.5	6.87	6.52	6.34
653.7	683.7	6.90	6.51	6.33
693.9	723.9	6.96	6.54	6.33
734.1	764.1	7.08	6.65	6.38
794.5	824.5	7.17	6.77	6.49
834.7	864.7	7.23	6.80	6.50
895.0	925.0	7.13	6.65	6.37
935.3	965.3	7.01	6.49	6.21
995.6	1025.6	6.93	6.35	6.08
1035.8	1065.8	7.00	6.32	6.04
1096.2	1126.2	7.14	6.40	6.07
1136.4	1166.4	7.24	6.53	6.17
1196.7	1226.7	7.45	6.81	6.37
1237.0	1267.0	7.59	7.00	6.55
1297.3	1327.3	7.95	7.47	7.05
1337.5	1367.5	8.18	7.83	7.47
1397.9	1427.9	8.45	8.17	7.96
1438.1	1468.1	8.56	8.35	8.17
1498.4	1528.4	8.87	8.66	8.45
1538.6	1568.6	9.11	8.88	8.72
1599.0	1629.0	9.53	9.32	9.17
1639.2	1669.2	9.83	9.64	9.53
1699.5	1729.5	10.37	10.21	10.10
1739.8	1769.8	10.76	10.62	10.49
1800.1	1830.1	11.36	11.20	11.10

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	18.31	21.97	24.50
50.3	80.3	18.01	21.57	24.53
90.5	120.5	18.21	21.66	26.10
130.8	160.8	18.54	22.84	22.82
171.0	201.0	18.69	23.48	23.02
211.2	241.2	19.73	21.57	25.15
251.4	281.4	20.73	20.98	26.87
291.7	321.7	20.13	22.83	29.38
331.9	361.9	19.46	23.33	27.72
372.1	402.1	18.67	24.71	26.63
412.3	442.3	18.46	22.54	27.63
452.6	482.6	19.86	24.22	25.40
492.8	522.8	20.85	22.46	22.01
533.0	563.0	20.91	24.57	22.34
573.2	603.2	22.14	25.17	24.08
613.5	643.5	21.59	22.21	23.52
653.7	683.7	23.94	23.54	25.03
693.9	723.9	19.98	25.76	24.11
734.1	764.1	17.37	23.35	24.32
794.5	824.5	16.36	19.69	24.98
834.7	864.7	17.67	20.48	23.70
895.0	925.0	19.66	20.32	20.23
935.3	965.3	17.69	18.34	18.58
995.6	1025.6	15.89	16.18	17.00
1035.8	1065.8	15.52	15.32	16.30
1096.2	1126.2	14.25	14.57	15.21
1136.4	1166.4	13.35	14.05	14.91
1196.7	1226.7	12.70	13.38	14.41
1237.0	1267.0	12.60	13.35	14.26
1297.3	1327.3	12.91	13.52	14.39
1337.5	1367.5	13.28	13.72	14.53
1397.9	1427.9	14.35	14.30	14.84
1438.1	1468.1	15.37	14.96	15.30
1498.4	1528.4	17.94	16.61	17.20
1538.6	1568.6	20.03	18.89	19.59
1599.0	1629.0	20.38	22.50	23.02
1639.2	1669.2	19.25	22.50	24.42
1699.5	1729.5	19.92	22.88	25.25
1739.8	1769.8	20.68	23.19	25.18
1800.1	1830.1	19.71	22.95	27.19

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	0.67	0.59	0.50
50.3	80.3	0.64	0.55	0.46
90.5	120.5	0.62	0.55	0.45
130.8	160.8	0.59	0.55	0.45
171.0	201.0	0.58	0.54	0.43
211.2	241.2	0.71	0.59	0.47
251.4	281.4	0.74	0.58	0.47
291.7	321.7	0.75	0.57	0.48
331.9	361.9	0.74	0.56	0.47
372.1	402.1	0.78	0.60	0.50
412.3	442.3	0.76	0.59	0.50
452.6	482.6	0.72	0.57	0.49
492.8	522.8	0.73	0.59	0.52
533.0	563.0	0.78	0.64	0.56
573.2	603.2	0.89	0.69	0.61
613.5	643.5	0.98	0.80	0.66
653.7	683.7	1.08	0.89	0.77
693.9	723.9	1.19	1.06	0.93
734.1	764.1	1.20	1.11	0.98
794.5	824.5	1.35	1.24	1.15
834.7	864.7	1.53	1.36	1.26
895.0	925.0	1.78	1.61	1.50
935.3	965.3	2.04	1.83	1.66
995.6	1025.6	2.29	2.07	1.87
1035.8	1065.8	2.36	2.19	1.95
1096.2	1126.2	2.38	2.26	2.03
1136.4	1166.4	2.39	2.29	2.07
1196.7	1226.7	2.35	2.27	2.12
1237.0	1267.0	2.27	2.24	2.10
1297.3	1327.3	1.93	1.87	1.86
1337.5	1367.5	1.68	1.59	1.58
1397.9	1427.9	1.47	1.31	1.24
1438.1	1468.1	1.40	1.19	1.09
1498.4	1528.4	1.22	0.98	0.86
1538.6	1568.6	1.11	0.84	0.70
1599.0	1629.0	0.82	0.56	0.41
1639.2	1669.2	0.63	0.39	0.30
1699.5	1729.5	0.46	0.24	0.20
1739.8	1769.8	0.38	0.20	0.16
1800.1	1830.1	0.26	0.14	0.10

Frequency Mixer

ADE-12MH

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=600.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1200.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
590.0	10.1	6.78	10.0	20.1	6.84	1190.0	10.1	7.83
575.1	25.0	6.72	50.0	60.1	6.59	1150.0	50.1	7.65
560.3	39.8	6.68	90.0	100.1	6.59	1110.0	90.1	7.52
545.4	54.7	6.65	110.0	120.1	6.61	1090.0	110.1	7.44
530.5	69.6	6.63	150.0	160.1	6.60	1050.0	150.1	7.34
515.6	84.5	6.59	170.0	180.1	6.62	1030.0	170.1	7.33
500.8	99.3	6.52	210.0	220.1	6.62	990.0	210.1	7.22
485.9	114.2	6.46	230.0	240.1	6.61	970.0	230.1	7.20
471.0	129.1	6.39	270.0	280.1	6.68	930.0	270.1	7.15
456.2	143.9	6.37	290.0	300.1	6.69	910.0	290.1	7.11
441.3	158.8	6.33	330.0	340.1	6.75	870.0	330.1	7.04
426.4	173.7	6.31	350.0	360.1	6.75	850.0	350.1	7.02
411.5	188.6	6.27	390.0	400.1	6.88	810.0	390.1	6.98
396.7	203.4	6.26	410.0	420.1	6.83	790.0	410.1	6.94
381.8	218.3	6.26	450.0	460.1	6.93	750.0	450.1	6.86
366.9	233.2	6.23	470.0	480.1	6.94	730.0	470.1	6.80
352.1	248.0	6.26	510.0	520.1	6.95	690.0	510.1	6.72
337.2	262.9	6.26	530.0	540.1	7.01	670.0	530.1	6.68
322.3	277.8	6.29	570.0	580.1	7.18	630.0	570.1	6.62
307.4	292.7	6.25	590.0	600.1	7.23	610.0	590.1	6.58
292.6	307.5	6.25	630.0	640.1	7.39	570.0	630.1	6.47
277.7	322.4	6.27	650.0	660.1	7.41	550.0	650.1	6.42
262.8	337.3	6.26	690.0	700.1	7.46	510.0	690.1	6.29
247.9	352.2	6.29	710.0	720.1	7.50	490.0	710.1	6.25
233.1	367.0	6.27	750.0	760.1	7.53	450.0	750.1	6.25
218.2	381.9	6.31	770.0	780.1	7.52	430.0	770.1	6.25
203.3	396.8	6.30	810.0	820.1	7.45	390.0	810.1	6.23
188.5	411.6	6.30	830.0	840.1	7.43	370.0	830.1	6.27
173.6	426.5	6.30	870.0	880.1	7.34	330.0	870.1	6.25
158.7	441.4	6.32	890.0	900.1	7.28	310.0	890.1	6.20
143.8	456.3	6.36	930.0	940.1	7.15	270.0	930.1	6.06
129.0	471.1	6.34	950.0	960.1	7.10	250.0	950.1	5.97
114.1	486.0	6.33	990.0	1000.1	7.07	210.0	990.1	5.87
99.2	500.9	6.31	1010.0	1020.1	7.08	190.0	1010.1	5.86
84.4	515.7	6.33	1050.0	1060.1	7.14	150.0	1050.1	5.93
69.5	530.6	6.34	1070.0	1080.1	7.18	130.0	1070.1	6.01
54.6	545.5	6.38	1110.0	1120.1	7.20	90.0	1110.1	6.15
39.7	560.4	6.42	1130.0	1140.1	7.22	70.0	1130.1	6.29
24.9	575.2	6.45	1170.0	1180.1	7.26	30.0	1170.1	6.53
10.0	590.1	6.68	1190.0	1200.1	7.28	10.0	1190.1	6.73

Frequency Mixer

ADE-12MH

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
10.1	75.62	76.70	77.70	74.83	66.15	64.02
50.3	62.03	64.14	65.87	61.22	57.91	55.94
90.5	57.15	59.01	60.86	57.81	54.47	52.08
130.8	53.91	56.03	57.87	56.31	52.20	50.69
171.0	51.69	53.48	55.57	54.59	51.85	49.91
211.2	49.73	51.71	54.17	53.42	51.72	48.71
251.4	47.99	50.44	52.82	52.05	50.55	47.39
291.7	46.67	49.20	51.67	48.72	48.45	46.60
331.9	45.53	48.16	50.72	45.19	46.16	45.34
372.1	44.98	47.74	50.34	42.82	44.55	44.40
412.3	44.19	47.08	49.95	41.17	42.95	43.19
452.6	43.11	45.56	48.25	38.91	41.12	42.25
492.8	42.09	44.56	47.06	37.48	39.27	40.88
533.0	41.43	44.15	47.21	36.39	38.10	39.19
573.2	41.31	43.97	47.10	35.81	38.03	39.33
613.5	41.66	43.92	46.35	35.31	37.63	39.45
653.7	42.47	45.04	47.38	34.88	36.82	38.83
693.9	42.62	46.06	49.03	34.60	36.16	37.94
734.1	42.25	45.53	48.52	34.01	35.82	37.26
794.5	40.67	43.24	45.41	32.20	34.44	36.24
834.7	39.07	41.16	43.00	30.87	33.07	35.11
895.0	37.41	39.08	40.22	29.14	31.03	32.94
935.3	36.55	38.47	39.80	27.94	29.65	31.59
995.6	35.22	37.30	38.46	26.80	28.62	30.61
1035.8	34.12	36.26	37.33	26.27	28.10	30.06
1096.2	32.93	35.13	36.39	26.20	27.97	29.86
1136.4	32.32	34.45	35.71	26.11	27.93	29.76
1196.7	31.47	33.41	34.47	25.92	27.78	29.49
1237.0	30.93	32.74	33.58	25.86	27.81	29.45
1297.3	30.32	31.96	32.64	25.60	27.65	29.28
1337.5	30.00	31.60	32.28	25.20	27.22	28.83
1397.9	28.95	30.45	31.17	24.62	26.22	27.60
1438.1	27.92	29.29	30.05	24.10	25.27	26.39
1498.4	26.90	28.02	28.61	23.30	23.85	24.24
1538.6	26.44	27.44	28.05	22.92	23.10	23.39
1599.0	25.87	26.77	27.33	22.40	22.51	22.78
1639.2	25.64	26.37	26.65	22.30	22.38	22.45
1699.5	25.68	26.15	26.21	23.00	22.81	22.51
1739.8	25.89	26.11	26.03	23.64	23.09	22.47
1800.1	26.11	26.03	25.68	24.73	23.60	22.61

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	50.62	53.11	48.82
50.3	80.3	35.48	35.60	35.64
90.5	120.5	30.72	30.80	30.90
130.8	160.8	27.91	27.95	28.00
171.0	201.0	25.92	26.00	26.04
211.2	241.2	24.50	24.62	24.67
251.4	281.4	23.42	23.59	23.64
291.7	321.7	22.67	22.72	22.79
331.9	361.9	22.06	22.21	22.28
372.1	402.1	21.63	21.86	21.99
412.3	442.3	21.23	21.51	21.59
452.6	482.6	20.68	20.87	21.04
492.8	522.8	20.30	20.57	20.84
533.0	563.0	20.22	20.61	20.93
573.2	603.2	20.23	20.81	21.14
613.5	643.5	20.12	20.70	21.03
653.7	683.7	19.41	19.81	20.01
693.9	723.9	18.44	18.56	18.59
734.1	764.1	17.40	17.34	17.24
794.5	824.5	16.03	15.99	15.86
834.7	864.7	15.51	15.51	15.40
895.0	925.0	15.06	15.06	15.10
935.3	965.3	14.94	15.09	15.19
995.6	1025.6	14.80	14.96	15.09
1035.8	1065.8	14.85	14.87	14.91
1096.2	1126.2	15.42	15.19	15.02
1136.4	1166.4	15.82	15.63	15.32
1196.7	1226.7	16.39	16.30	15.99
1237.0	1267.0	16.50	16.51	16.25
1297.3	1327.3	16.03	16.05	15.88
1337.5	1367.5	15.33	15.25	15.04
1397.9	1427.9	14.02	13.75	13.44
1438.1	1468.1	13.14	12.73	12.36
1498.4	1528.4	11.81	11.25	10.79
1538.6	1568.6	10.82	10.15	9.68
1599.0	1629.0	9.21	8.65	8.28
1639.2	1669.2	8.32	7.79	7.54
1699.5	1729.5	7.23	6.81	6.59
1739.8	1769.8	6.69	6.30	6.09
1800.1	1830.1	6.04	5.67	5.47

REV. X2
ADE-12MH
100817
Page 3 of 5

Frequency Mixer

ADE-12MH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1200.5MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+10	+13	+16		+10	+13	+16		+10	+13	+16
10.1	40.1	1.52	1.41	1.34	10.1	1.04	1.52	2.26	10.0	2.24	1.75	1.50
50.3	80.3	1.52	1.40	1.33	50.3	1.09	1.66	2.49	50.3	2.18	1.79	1.55
90.5	120.5	1.53	1.40	1.32	90.5	1.06	1.60	2.36	90.7	2.23	1.83	1.61
130.8	160.8	1.52	1.39	1.31	130.8	1.11	1.61	2.39	110.8	2.32	1.88	1.64
171.0	201.0	1.51	1.38	1.31	171.0	1.12	1.61	2.36	151.2	2.25	1.83	1.61
211.2	241.2	1.50	1.37	1.31	211.2	1.13	1.60	2.36	171.4	2.15	1.76	1.54
251.4	281.4	1.49	1.37	1.32	251.4	1.15	1.63	2.40	211.7	2.36	1.92	1.70
291.7	321.7	1.48	1.37	1.33	291.7	1.14	1.60	2.34	231.9	2.27	1.84	1.61
331.9	361.9	1.47	1.38	1.34	331.9	1.14	1.63	2.39	272.2	2.25	1.83	1.63
372.1	402.1	1.47	1.38	1.34	372.1	1.14	1.63	2.37	292.4	2.28	1.85	1.64
412.3	442.3	1.46	1.39	1.34	412.3	1.13	1.65	2.40	332.7	2.25	1.83	1.61
452.6	482.6	1.44	1.38	1.34	452.6	1.12	1.67	2.42	352.9	2.22	1.81	1.61
492.8	522.8	1.41	1.35	1.31	492.8	1.12	1.67	2.41	393.2	2.25	1.84	1.64
533.0	563.0	1.38	1.32	1.29	533.0	1.12	1.70	2.45	413.4	2.31	1.88	1.66
573.2	603.2	1.35	1.31	1.29	573.2	1.13	1.71	2.45	453.7	2.14	1.75	1.56
613.5	643.5	1.33	1.29	1.28	613.5	1.15	1.75	2.49	473.9	2.20	1.82	1.63
653.7	683.7	1.32	1.29	1.28	653.7	1.16	1.76	2.49	514.2	2.23	1.84	1.65
693.9	723.9	1.32	1.29	1.29	693.9	1.18	1.78	2.51	534.4	2.18	1.81	1.62
734.1	764.1	1.33	1.30	1.29	734.1	1.21	1.82	2.55	574.7	2.19	1.84	1.67
794.5	824.5	1.31	1.27	1.26	794.5	1.24	1.85	2.57	594.9	2.18	1.84	1.67
834.7	864.7	1.27	1.24	1.23	834.7	1.28	1.89	2.61	635.3	2.10	1.80	1.64
895.0	925.0	1.18	1.15	1.14	895.0	1.30	1.90	2.61	655.4	2.07	1.79	1.65
935.3	965.3	1.12	1.07	1.08	935.3	1.33	1.93	2.64	695.8	2.15	1.88	1.72
995.6	1025.6	1.10	1.04	1.08	995.6	1.37	1.95	2.64	715.9	2.09	1.83	1.68
1035.8	1065.8	1.16	1.12	1.14	1035.8	1.43	2.02	2.71	756.3	2.02	1.81	1.70
1096.2	1126.2	1.29	1.26	1.27	1096.2	1.47	2.04	2.70	776.4	2.04	1.83	1.72
1136.4	1166.4	1.41	1.38	1.38	1136.4	1.53	2.11	2.79	816.8	1.95	1.78	1.68
1196.7	1226.7	1.63	1.62	1.61	1196.7	1.57	2.13	2.77	836.9	1.94	1.79	1.71
1237.0	1267.0	1.81	1.80	1.79	1237.0	1.62	2.20	2.86	877.3	1.94	1.81	1.73
1297.3	1327.3	2.06	2.08	2.07	1297.3	1.65	2.20	2.83	897.5	1.91	1.78	1.71
1337.5	1367.5	2.21	2.25	2.26	1337.5	1.70	2.26	2.91	937.8	1.78	1.70	1.66
1397.9	1427.9	2.34	2.39	2.43	1397.9	1.72	2.25	2.87	958.0	1.83	1.76	1.73
1438.1	1468.1	2.43	2.47	2.51	1438.1	1.75	2.28	2.91	998.3	1.80	1.72	1.69
1498.4	1528.4	2.57	2.59	2.61	1498.4	1.73	2.24	2.84	1018.5	1.70	1.65	1.64
1538.6	1568.6	2.67	2.69	2.71	1538.6	1.74	2.25	2.86	1058.8	1.76	1.73	1.74
1599.0	1629.0	2.77	2.76	2.76	1599.0	1.70	2.18	2.78	1079.0	1.75	1.71	1.71
1639.2	1669.2	2.77	2.74	2.73	1639.2	1.74	2.23	2.84	1119.3	1.59	1.58	1.60
1699.5	1729.5	2.70	2.67	2.65	1699.5	1.81	2.26	2.85	1139.5	1.60	1.62	1.66
1739.8	1769.8	2.64	2.60	2.57	1739.8	1.92	2.35	2.93	1179.8	1.68	1.68	1.70
1800.1	1830.1	2.53	2.48	2.45	1800.1	2.03	2.40	2.93	1200.0	1.74	1.80	1.88

REV. X2
ADE-12MH
100817
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	11	22	11	29	22	30	22	45	41	70
1	-	14	+0	36	12	32	30	43	50	37	62	54
2	97	65	57	61	57	66	58	67	64	65	59	78
3	>100	67	70	66	63	68	59	69	75	85	84	84
4	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
5	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 600.1 MHz; -6.00 dBm.

LO IN: 630.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -12.54 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	21	33	22	42	33	41	34	58	62	73
1	-	15	+0	32	12	33	30	48	57	43	68	61
2	81	54	51	62	45	53	46	54	54	61	51	66
3	>100	44	45	53	49	48	40	54	63	59	60	54
4	>100	78	67	60	66	60	72	59	61	74	79	71
5	>100	71	73	71	57	60	55	64	54	58	69	75
6	>100	95	96	85	74	74	73	75	67	71	77	80
7	>100	91	94	>97	84	76	77	77	75	70	73	82
8	>100	96	92	97	97	95	92	81	82	82	79	76
9	>100	>97	>97	96	>97	>97	>97	89	81	83	82	80
10	>100	>97	>97	>97	>97	>97	>97	96	89	87	90	88
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 600.1 MHz; 4.00 dBm.

LO IN: 630.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -2.57 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



REV. X2

ADE-12MH

100817


Page 5 of 5

Frequency Mixer


ADE-12MH

Typical Performance Curves


Conversion Loss @ IF=30MHz

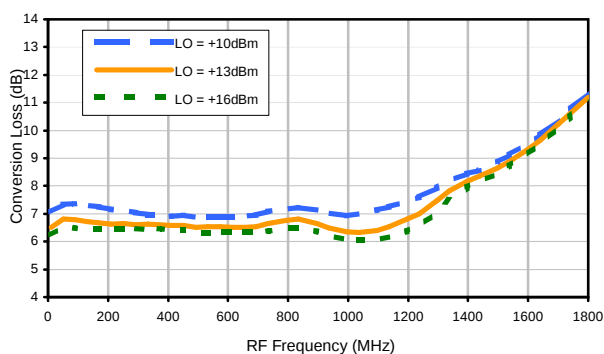


Conversion Loss vs. IF @ RF=600.1MHz

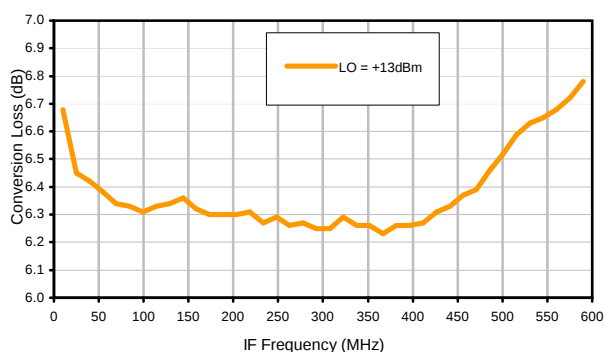


Conversion Loss vs. IF @ RF=10.1MHz

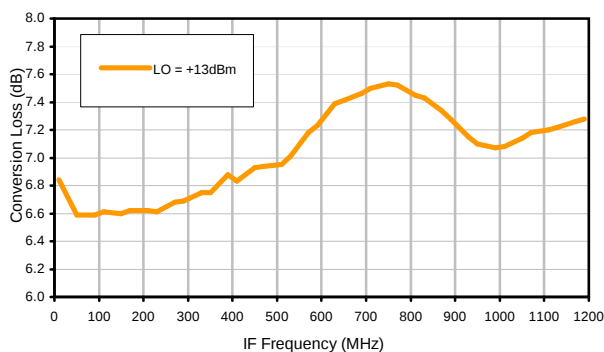


Conversion Loss vs. IF @ RF=1200.1MHz

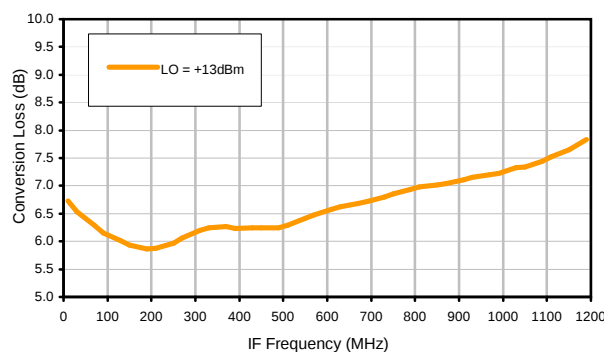

IP3 Input

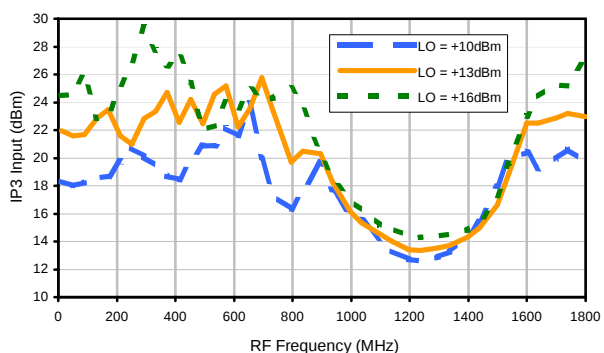

Compression @ RF IN=+9dBm

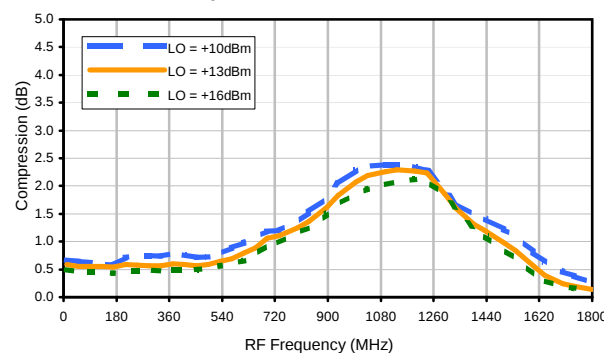

REV. X2
ADE-12MH
100817
Page 1 of 3

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

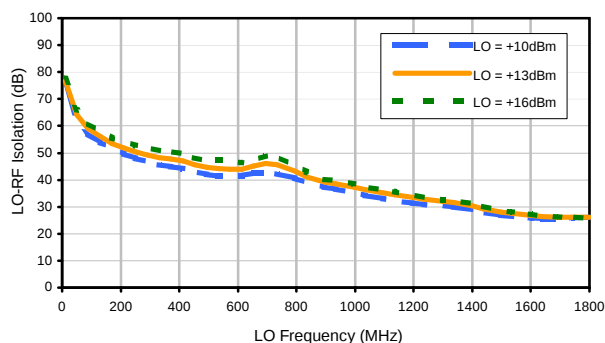


LO-IF Isolation

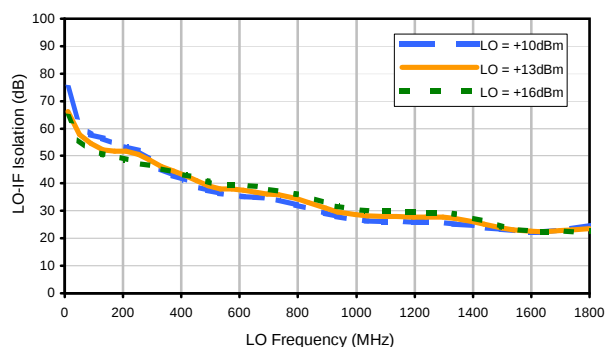


RF-IF Isolation

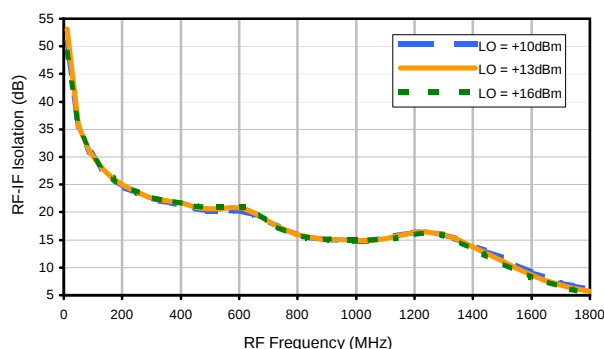


RF VSWR

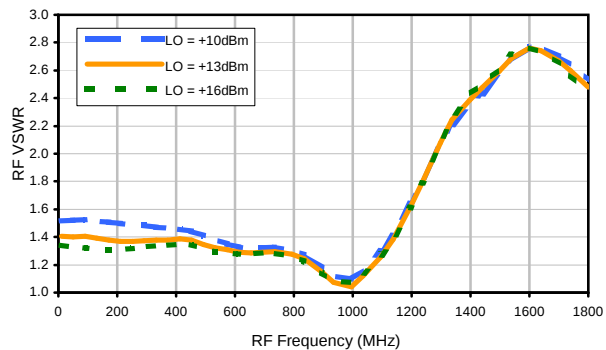

LO VSWR

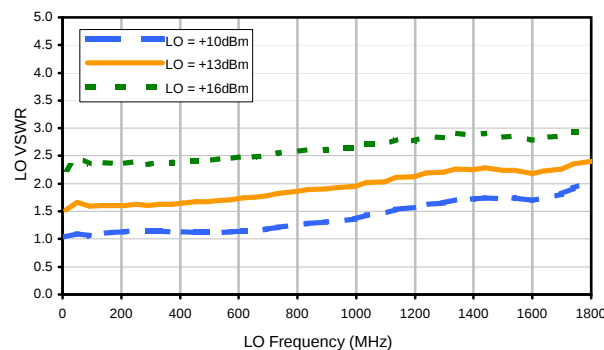

IF VSWR

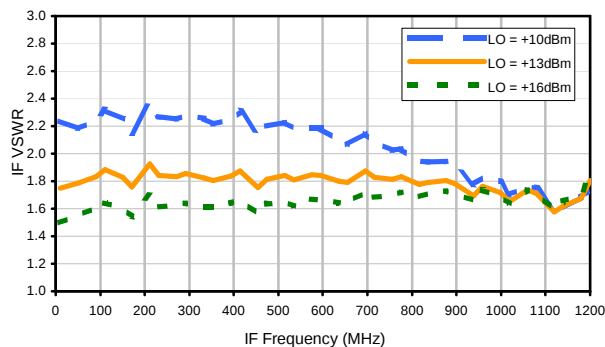

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	11	22	11	29	22	30	22	45	41	70
1	-	14	+0	36	12	32	30	43	50	37	62	54
2	97	65	57	61	57	66	58	67	64	65	59	78
3	>100	67	70	66	63	68	59	69	75	85	84	84
4	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
5	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
6	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
8	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>100	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 600.1 MHz; -6.00 dBm.

LO IN: 630.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -12.54 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	21	33	22	42	33	41	34	58	62	73
1	-	15	+0	32	12	33	30	48	57	43	68	61
2	81	54	51	62	45	53	46	54	54	61	51	66
3	>100	44	45	53	49	48	40	54	63	59	60	54
4	>100	78	67	60	66	60	72	59	61	74	79	71
5	>100	71	73	71	57	60	55	64	54	58	69	75
6	>100	95	96	85	74	74	73	75	67	71	77	80
7	>100	91	94	>97	84	76	77	77	75	70	73	82
8	>100	96	92	97	97	95	92	81	82	82	79	76
9	>100	>97	>97	96	>97	>97	>97	89	81	83	82	80
10	>100	>97	>97	>97	>97	>97	>97	96	89	87	90	88
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 600.1 MHz; 4.00 dBm.

LO IN: 630.01 MHz; +13.00 dBm

IF OUT: 29.91 MHz; -2.57 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



REV. X2

ADE-12MH

100817

Page 3 of 3

CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS ±

3 PL DECIMALS ± .005

ANGLES ±

FRACTIONS ±

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

 13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:

1 OF 1

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT



Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215