

Surface Mount Frequency Mixer

Level 7 (LO Power +7 dBm) 10 to 1000 MHz

ADEX-10+


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing




PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

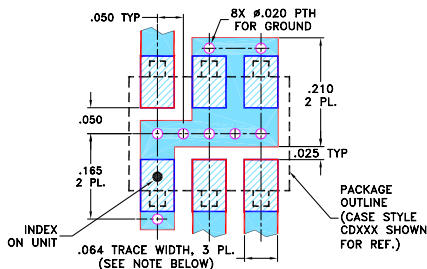

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- excellent L-R isolation, 60 dB typ.
- flat conversion loss, ±0.2dB typ over entire band
- low conversion loss, 6.8 dB typ.
- good VSWR, 2:1 typ. for LO, 1.4:1 typ. for RF, 1.8:1 typ. for IF
- good performance to 1500 MHz
- aqueous washable
- protected by U.S. Patents 6,133,525 and 6,947,717

Applications

- cellular
- PCN

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band			Total Range Max.	L	M		U	L	M		U					
		$\bar{X}$	σ	Max.			Typ.	Min.			Typ.	Min.		Typ.	Min.			
		f_L - f_U																
10-1000	DC-800	6.8	0.10	7.8†	8.3†	80	55	60	40	47	37	40	26	33	20	24	13	16

1 dB COMP.: +1 dBm typ.

[†]Conversion loss increases 0.5 dB when IF is above 150 MHz

L = low range [f_L to 10 f_L]

m = mid band [$2f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
10.00	40.00	6.86	80.91	62.86	1.43	1.59
25.00	55.00	6.73	80.18	55.33	1.43	1.62
40.00	70.00	6.78	78.88	51.04	1.41	1.56
55.00	85.00	6.77	77.53	47.55	1.40	1.55
70.00	100.00	6.72	77.00	45.78	1.41	1.61
85.00	115.00	6.74	75.52	44.15	1.40	1.62
100.00	130.00	6.76	75.63	42.50	1.39	1.61
200.00	230.00	6.72	76.11	36.93	1.36	1.61
300.00	330.00	6.69	77.57	34.10	1.35	1.64
400.00	430.00	6.64	62.74	33.06	1.35	1.66
500.00	530.00	6.65	56.43	32.02	1.35	1.72
600.00	630.00	6.71	53.73	30.71	1.34	1.77
700.00	730.00	6.89	50.35	29.89	1.36	1.91
800.00	830.00	6.68	47.01	28.37	1.34	1.83
900.00	930.00	6.59	48.15	26.00	1.23	2.02
1000.00	1030.00	6.66	52.10	23.48	1.11	2.09

Electrical Schematic

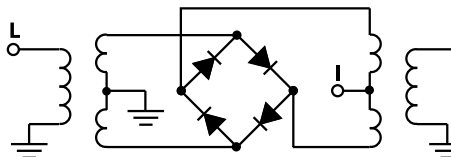

Generic photo used for illustration purposes only

CASE STYLE: CD542

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications









Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M158496
ADEX-10+
ED-9623/2
DJ/TD/CP/AM
200415
Page 1 of 2

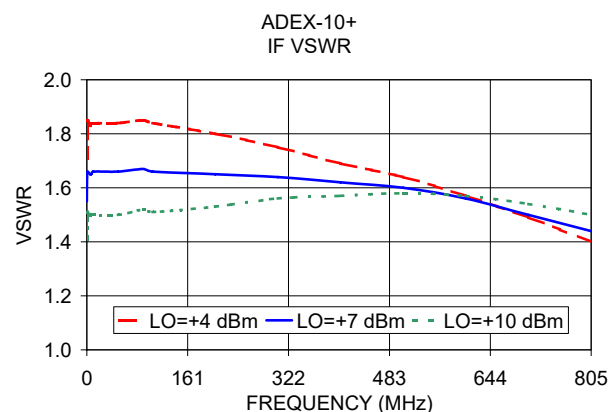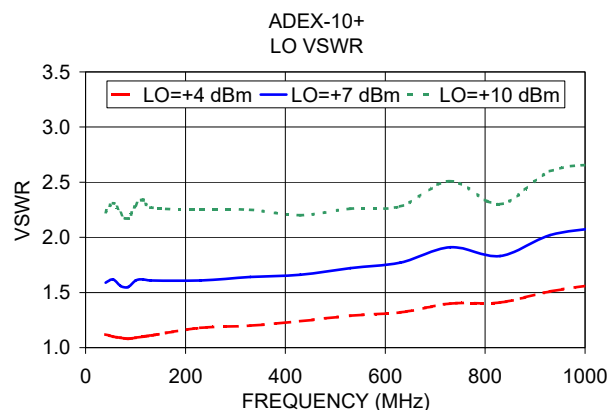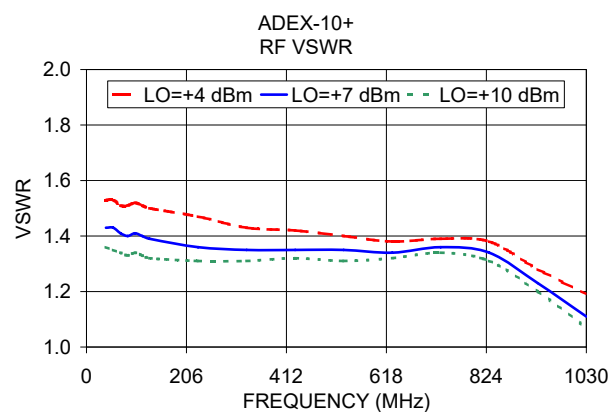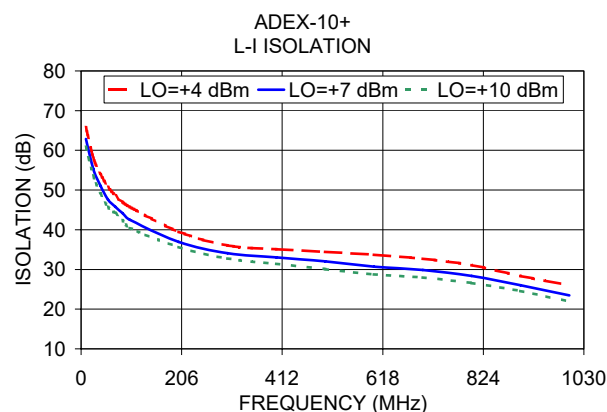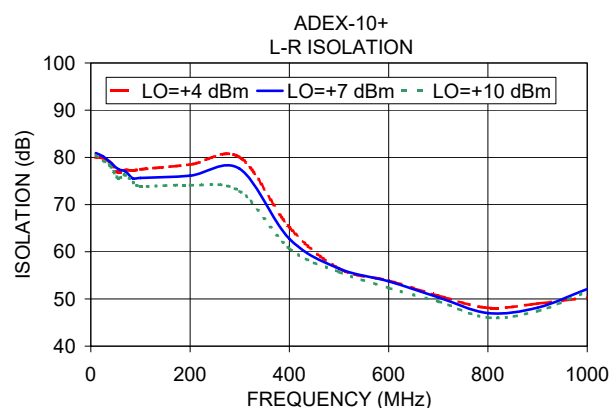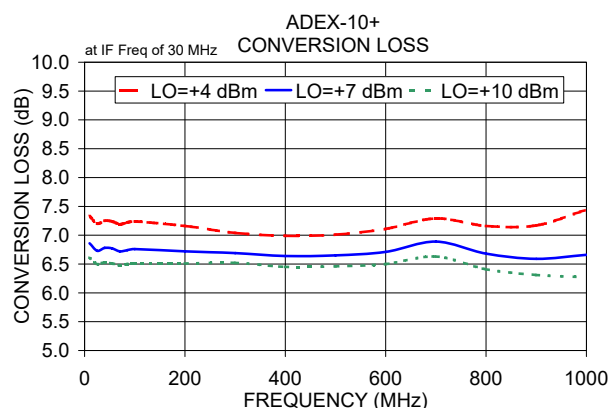

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADEX-10+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	6.92	6.38	6.15
70.4	100.4	7.24	6.65	6.40
130.7	160.7	7.34	6.77	6.51
190.9	220.9	7.28	6.75	6.52
251.2	281.2	7.19	6.72	6.53
311.5	341.5	7.21	6.81	6.54
371.8	401.8	7.25	6.83	6.61
432.0	462.0	7.24	6.80	6.55
492.3	522.3	7.32	6.86	6.62
552.6	582.6	7.34	6.84	6.55
612.9	642.9	7.34	6.88	6.61
673.1	703.1	7.49	7.05	6.77
733.4	763.4	7.54	7.02	6.69
793.7	823.7	7.42	6.86	6.58
854.0	884.0	7.48	6.90	6.57
914.2	944.2	7.53	6.81	6.43
974.5	1004.5	7.53	6.78	6.37
1034.8	1064.8	7.54	6.80	6.29
1095.1	1125.1	7.58	6.91	6.42
1155.3	1185.3	7.44	6.92	6.49
1215.6	1245.6	7.26	6.69	6.35
1275.9	1305.9	7.05	6.58	6.22
1336.2	1366.2	6.92	6.51	6.24
1396.4	1426.4	6.89	6.58	6.40
1436.6	1466.6	6.93	6.70	6.57
1496.9	1526.9	7.06	6.86	6.74
1537.1	1567.1	7.07	6.92	6.83
1597.3	1627.3	7.27	7.06	6.96
1637.5	1667.5	7.38	7.18	7.12
1697.8	1727.8	7.58	7.37	7.28
1738.0	1768.0	7.76	7.54	7.46
1798.3	1828.3	8.05	7.81	7.68
1838.4	1868.4	8.25	7.99	7.90
1898.7	1928.7	8.55	8.31	8.15
1938.9	1968.9	8.77	8.46	8.34
1999.2	2029.2	9.14	8.75	8.64
2039.4	2069.4	9.37	8.91	8.79
2099.6	2129.6	9.85	9.38	9.33
2139.8	2169.8	10.16	9.63	9.59
2200.1	2230.1	10.78	10.35	10.73

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	14.85	17.54	19.82
70.4	100.4	14.22	18.49	16.32
130.7	160.7	14.79	14.39	16.57
190.9	220.9	12.18	15.01	18.51
251.2	281.2	12.18	16.49	21.68
311.5	341.5	13.95	18.08	22.29
371.8	401.8	14.66	17.96	18.93
432.0	462.0	14.76	17.55	25.29
492.3	522.3	14.65	16.99	18.41
552.6	582.6	15.00	16.23	16.36
612.9	642.9	15.78	15.83	17.47
673.1	703.1	14.29	15.82	20.44
733.4	763.4	14.45	19.05	21.12
793.7	823.7	16.97	16.48	15.87
854.0	884.0	15.93	13.33	13.01
914.2	944.2	12.78	12.05	10.76
974.5	1004.5	10.62	10.01	8.83
1034.8	1064.8	8.55	8.07	6.63
1095.1	1125.1	7.44	7.39	6.35
1155.3	1185.3	8.16	9.92	11.11
1215.6	1245.6	10.00	13.70	15.29
1275.9	1305.9	11.56	13.61	13.81
1336.2	1366.2	12.41	13.61	14.66
1396.4	1426.4	11.66	13.20	13.92
1436.6	1466.6	12.53	13.12	14.66
1496.9	1526.9	13.21	13.56	13.32
1537.1	1567.1	12.33	13.07	13.75
1597.3	1627.3	14.35	18.01	14.70
1637.5	1667.5	13.38	17.12	16.79
1697.8	1727.8	13.94	16.97	17.86
1738.0	1768.0	13.55	15.21	15.91
1798.3	1828.3	13.09	14.62	15.99
1838.4	1868.4	13.62	15.17	14.26
1898.7	1928.7	12.99	14.39	14.79
1938.9	1968.9	12.72	15.69	15.60
1999.2	2029.2	13.12	13.83	13.00
2039.4	2069.4	12.96	14.38	11.46
2099.6	2129.6	10.52	10.42	10.05
2139.8	2169.8	9.07	10.13	9.05
2200.1	2230.1	7.99	8.71	8.64

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	0.39	0.21	0.14
70.4	100.4	0.52	0.28	0.13
130.7	160.7	0.55	0.34	0.18
190.9	220.9	0.53	0.30	0.30
251.2	281.2	0.47	0.34	0.23
311.5	341.5	0.48	0.36	0.26
371.8	401.8	0.45	0.28	0.22
432.0	462.0	0.52	0.32	0.34
492.3	522.3	0.53	0.33	0.32
552.6	582.6	0.51	0.44	0.33
612.9	642.9	0.46	0.35	0.35
673.1	703.1	0.71	0.59	0.55
733.4	763.4	0.75	0.59	0.56
793.7	823.7	1.00	0.92	0.83
854.0	884.0	1.30	1.19	1.02
914.2	944.2	1.42	1.41	1.31
974.5	1004.5	1.46	1.44	1.50
1034.8	1064.8	1.37	1.45	1.52
1095.1	1125.1	1.58	1.44	1.39
1155.3	1185.3	1.67	1.48	1.20
1215.6	1245.6	1.88	1.57	1.30
1275.9	1305.9	2.09	1.66	1.35
1336.2	1366.2	2.14	1.75	1.43
1396.4	1426.4	1.88	1.52	1.31
1436.6	1466.6	1.72	1.47	1.26
1496.9	1526.9	1.47	1.26	1.09
1537.1	1567.1	1.41	0.97	0.96
1597.3	1627.3	1.22	0.90	0.86
1637.5	1667.5	1.22	0.96	0.79
1697.8	1727.8	1.16	0.84	0.84
1738.0	1768.0	1.12	0.85	0.82
1798.3	1828.3	1.10	0.83	0.78
1838.4	1868.4	1.14	0.81	0.83
1898.7	1928.7	1.18	0.77	0.75
1938.9	1968.9	1.09	0.85	0.67
1999.2	2029.2	1.01	0.96	0.83
2039.4	2069.4	1.07	0.84	0.90
2099.6	2129.6	1.17	1.04	1.04
2139.8	2169.8	1.28	1.28	1.21
2200.1	2230.1	1.22	1.15	0.81

REV. X2

ADEX-10+

100817

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ADEX-10+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
480.0	20.1	7.02	10.0	20.1	6.37	800.0	200.1	7.10
467.9	32.2	7.03	30.0	40.1	6.50	779.7	220.4	7.07
455.9	44.2	7.03	50.0	60.1	6.58	759.5	240.6	7.05
443.8	56.3	6.99	70.0	80.1	6.54	739.2	260.9	7.02
431.8	68.3	6.97	90.0	100.1	6.56	719.0	281.1	7.00
419.7	80.4	6.97	110.0	120.1	6.62	698.7	301.4	6.97
407.7	92.4	6.98	130.0	140.1	6.57	678.5	321.6	6.94
395.6	104.5	6.95	150.0	160.1	6.58	658.2	341.9	6.93
383.6	116.5	6.93	170.0	180.1	6.59	637.9	362.2	6.91
371.5	128.6	6.86	190.0	200.1	6.62	617.7	382.4	6.87
359.5	140.6	6.84	210.0	220.1	6.63	597.4	402.7	6.85
347.4	152.7	6.85	230.0	240.1	6.61	577.2	422.9	6.84
335.4	164.7	6.83	250.0	260.1	6.65	556.9	443.2	6.82
323.3	176.8	6.81	270.0	280.1	6.72	536.7	463.4	6.81
311.3	188.8	6.80	290.0	300.1	6.76	516.4	483.7	6.83
299.2	200.9	6.79	310.0	320.1	6.76	496.2	503.9	6.78
287.2	212.9	6.78	330.0	340.1	6.81	475.9	524.2	6.80
275.1	225.0	6.76	350.0	360.1	6.80	455.6	544.5	6.81
263.1	237.0	6.73	370.0	380.1	6.88	435.4	564.7	6.78
251.0	249.1	6.71	390.0	400.1	6.93	415.1	585.0	6.79
239.0	261.1	6.67	410.0	420.1	6.91	394.9	605.2	6.79
226.9	273.2	6.65	430.0	440.1	6.96	374.6	625.5	6.80
214.9	285.2	6.74	450.0	460.1	7.03	354.4	645.7	6.83
202.8	297.3	6.74	470.0	480.1	7.08	334.1	666.0	6.88
190.8	309.3	6.74	490.0	500.1	7.13	313.8	686.3	6.85
178.7	321.4	6.73	510.0	520.1	7.13	293.6	706.5	6.90
166.7	333.4	6.68	530.0	540.1	7.14	273.3	726.8	6.88
154.6	345.5	6.67	550.0	560.1	7.20	253.1	747.0	6.84
142.6	357.5	6.72	570.0	580.1	7.28	232.8	767.3	6.70
130.5	369.6	6.75	590.0	600.1	7.31	212.6	787.5	6.69
118.5	381.6	6.79	610.0	620.1	7.40	192.3	807.8	6.63
106.4	393.7	6.76	630.0	640.1	7.46	172.1	828.0	6.54
94.4	405.7	6.75	650.0	660.1	7.62	151.8	848.3	6.54
82.3	417.8	6.74	670.0	680.1	7.68	131.5	868.6	6.48
70.3	429.8	6.78	690.0	700.1	7.76	111.3	888.8	6.51
58.2	441.9	6.78	710.0	720.1	7.74	91.0	909.1	6.48
46.2	453.9	6.77	730.0	740.1	7.81	70.8	929.3	6.52
34.1	466.0	6.83	750.0	760.1	7.87	50.5	949.6	6.59
22.1	478.0	6.84	770.0	780.1	7.82	30.3	969.8	6.59
10.0	490.1	6.65	790.0	800.1	7.77	10.0	990.1	6.80

REV. X2
ADEX-10+
100817
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
10.1	55.82	64.63	70.05	49.87	52.50	56.40
70.4	59.83	62.51	64.56	47.14	45.09	43.87
130.7	59.54	60.63	62.03	42.60	40.12	38.49
190.9	58.42	59.40	59.48	38.98	36.55	35.45
251.2	57.59	57.71	56.89	35.81	34.17	33.35
311.5	56.65	56.21	55.07	33.63	32.52	31.76
371.8	56.56	55.57	53.71	32.04	31.12	30.34
432.0	56.43	55.35	53.17	30.92	30.05	29.23
492.3	56.61	56.11	53.73	30.02	29.34	28.58
552.6	56.14	55.28	52.01	29.09	28.26	27.41
612.9	56.27	55.65	51.08	28.61	27.70	26.73
673.1	55.24	59.09	52.88	28.29	27.53	26.56
733.4	53.47	62.90	56.26	27.69	26.87	25.94
793.7	51.52	63.86	61.26	26.90	26.00	25.21
854.0	48.73	56.13	70.38	25.74	24.80	24.10
914.2	46.37	51.96	60.12	24.62	23.54	22.77
974.5	44.52	49.49	56.14	23.75	22.53	21.60
1034.8	43.54	48.31	56.77	22.92	21.69	20.56
1095.1	43.30	48.27	56.90	22.26	21.22	20.06
1155.3	43.50	48.80	51.10	21.51	20.70	19.71
1215.6	45.53	54.88	48.34	20.34	19.40	18.44
1275.9	52.39	49.85	42.83	18.91	17.80	16.95
1336.2	57.38	42.69	38.76	17.49	16.42	15.73
1396.4	44.99	38.17	35.45	16.46	15.51	14.89
1436.6	41.06	35.89	33.59	15.92	15.04	14.43
1496.9	36.84	32.97	30.94	15.26	14.41	13.79
1537.1	34.89	31.55	29.69	14.94	14.11	13.49
1597.3	32.15	29.41	27.79	14.38	13.59	12.98
1637.5	30.71	28.22	26.70	13.98	13.18	12.57
1697.8	28.83	26.64	25.30	13.56	12.75	12.15
1738.0	27.82	25.73	24.45	13.35	12.51	11.92
1798.3	26.54	24.61	23.34	13.07	12.21	11.58
1838.4	26.02	24.16	22.90	12.97	12.10	11.46
1898.7	25.12	23.40	22.15	12.80	11.95	11.29
1938.9	24.38	22.76	21.55	12.64	11.81	11.15
1999.2	23.58	22.15	20.93	12.59	11.78	11.11
2039.4	23.09	21.80	20.62	12.52	11.74	11.07
2099.6	22.12	21.19	20.11	12.42	11.71	11.05
2139.8	21.82	21.09	20.04	12.51	11.85	11.18
2200.1	20.42	20.09	19.14	12.36	11.83	11.15

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	34.08	33.20	47.48
70.4	100.4	33.50	33.42	33.25
130.7	160.7	29.20	29.39	29.44
190.9	220.9	26.18	26.45	26.48
251.2	281.2	24.41	24.71	24.74
311.5	341.5	23.12	23.38	23.50
371.8	401.8	22.07	22.42	22.64
432.0	462.0	21.35	21.77	22.07
492.3	522.3	20.51	20.93	21.28
552.6	582.6	19.75	20.31	20.77
612.9	642.9	19.37	20.10	20.70
673.1	703.1	18.99	19.73	20.27
733.4	763.4	18.56	19.09	19.47
793.7	823.7	17.81	18.18	18.39
854.0	884.0	16.91	17.23	17.46
914.2	944.2	16.39	16.72	16.99
974.5	1004.5	16.17	16.58	16.88
1034.8	1064.8	16.24	16.77	17.21
1095.1	1125.1	16.62	17.28	18.23
1155.3	1185.3	17.39	18.18	19.16
1215.6	1245.6	18.20	18.59	18.82
1275.9	1305.9	18.46	18.26	17.96
1336.2	1366.2	17.81	17.30	16.85
1396.4	1426.4	16.50	15.89	15.40
1436.6	1466.6	15.55	14.89	14.40
1496.9	1526.9	14.23	13.53	13.00
1537.1	1567.1	13.40	12.67	12.11
1597.3	1627.3	12.36	11.62	11.07
1637.5	1667.5	11.65	10.95	10.42
1697.8	1727.8	10.72	10.07	9.60
1738.0	1768.0	10.14	9.52	9.11
1798.3	1828.3	9.31	8.76	8.40
1838.4	1868.4	8.88	8.36	8.03
1898.7	1928.7	8.17	7.71	7.41
1938.9	1968.9	7.79	7.36	7.08
1999.2	2029.2	7.27	6.88	6.62
2039.4	2069.4	7.05	6.68	6.43
2099.6	2129.6	6.68	6.36	6.12
2139.8	2169.8	6.52	6.22	6.01
2200.1	2230.1	6.28	6.02	5.82

Frequency Mixer

ADEX-10+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
10.1	40.1	1.65	1.44	1.57	10.1	1.10	1.55	2.24	10.1	1.47	1.35	1.17
70.4	100.4	1.55	1.43	1.36	70.4	1.10	1.59	2.25	30.4	1.36	1.18	1.04
130.7	160.7	1.50	1.40	1.32	130.7	1.17	1.63	2.30	50.6	1.40	1.11	1.05
190.9	220.9	1.54	1.44	1.40	190.9	1.24	1.65	2.29	70.9	1.38	1.10	1.05
251.2	281.2	1.55	1.46	1.42	251.2	1.29	1.69	2.33	91.1	1.40	1.12	1.06
311.5	341.5	1.56	1.48	1.44	311.5	1.34	1.76	2.41	111.4	1.38	1.13	1.08
371.8	401.8	1.56	1.49	1.45	371.8	1.37	1.81	2.47	131.6	1.39	1.15	1.09
432.0	462.0	1.57	1.50	1.46	432.0	1.41	1.87	2.53	151.9	1.40	1.15	1.08
492.3	522.3	1.60	1.53	1.49	492.3	1.44	1.92	2.58	172.2	1.42	1.16	1.09
552.6	582.6	1.60	1.53	1.49	552.6	1.47	1.99	2.68	192.4	1.44	1.18	1.09
612.9	642.9	1.60	1.54	1.50	612.9	1.51	2.02	2.71	212.7	1.46	1.22	1.13
673.1	703.1	1.61	1.55	1.51	673.1	1.56	2.10	2.79	232.9	1.46	1.23	1.15
733.4	763.4	1.56	1.51	1.47	733.4	1.63	2.22	2.94	253.2	1.45	1.23	1.14
793.7	823.7	1.53	1.47	1.44	793.7	1.64	2.22	2.92	273.4	1.45	1.23	1.16
854.0	884.0	1.53	1.45	1.41	854.0	1.69	2.27	2.98	293.7	1.46	1.24	1.16
914.2	944.2	1.49	1.41	1.36	914.2	1.78	2.42	3.16	313.9	1.47	1.24	1.17
974.5	1004.5	1.45	1.36	1.31	974.5	1.83	2.44	3.16	334.2	1.45	1.24	1.16
1034.8	1064.8	1.39	1.30	1.23	1034.8	1.90	2.53	3.24	354.5	1.45	1.23	1.15
1095.1	1125.1	1.29	1.20	1.12	1095.1	2.00	2.65	3.36	374.7	1.44	1.23	1.14
1155.3	1185.3	1.19	1.09	1.02	1155.3	2.04	2.69	3.40	395.0	1.46	1.24	1.13
1215.6	1245.6	1.15	1.09	1.10	1215.6	2.08	2.71	3.40	415.2	1.47	1.25	1.14
1275.9	1305.9	1.20	1.20	1.22	1275.9	2.11	2.73	3.41	435.5	1.47	1.25	1.14
1336.2	1366.2	1.29	1.32	1.34	1336.2	2.13	2.74	3.42	455.7	1.48	1.25	1.14
1396.4	1426.4	1.40	1.45	1.49	1396.4	2.11	2.71	3.37	476.0	1.47	1.25	1.13
1436.6	1466.6	1.46	1.51	1.55	1436.6	2.15	2.74	3.40	496.3	1.47	1.24	1.13
1496.9	1526.9	1.58	1.65	1.70	1496.9	2.21	2.78	3.43	516.5	1.48	1.25	1.12
1537.1	1567.1	1.65	1.73	1.79	1537.1	2.26	2.82	3.45	536.8	1.47	1.24	1.12
1597.3	1627.3	1.73	1.80	1.86	1597.3	2.36	2.90	3.51	557.0	1.47	1.24	1.11
1637.5	1667.5	1.78	1.85	1.91	1637.5	2.44	2.95	3.52	577.3	1.48	1.24	1.10
1697.8	1727.8	1.82	1.86	1.91	1697.8	2.55	3.02	3.57	597.5	1.46	1.23	1.09
1738.0	1768.0	1.85	1.89	1.93	1738.0	2.63	3.08	3.60	617.8	1.45	1.22	1.08
1798.3	1828.3	1.81	1.82	1.84	1798.3	2.69	3.07	3.53	638.0	1.46	1.23	1.08
1838.4	1868.4	1.96	1.98	2.01	1838.4	2.79	3.15	3.59	658.3	1.45	1.22	1.07
1898.7	1928.7	1.99	2.00	2.02	1898.7	2.86	3.15	3.54	678.6	1.45	1.21	1.07
1938.9	1968.9	2.14	2.15	2.18	1938.9	2.95	3.18	3.58	698.8	1.45	1.21	1.07
1999.2	2029.2	2.24	2.25	2.27	1999.2	2.96	3.17	3.46	719.1	1.43	1.20	1.05
2039.4	2069.4	2.38	2.39	2.41	2039.4	3.01	3.19	3.49	739.3	1.42	1.19	1.05
2099.6	2129.6	2.45	2.47	2.47	2099.6	2.99	3.12	3.37	759.6	1.42	1.18	1.04
2139.8	2169.8	2.57	2.59	2.59	2139.8	3.01	3.09	3.36	779.8	1.40	1.17	1.04
2200.1	2230.1	2.55	2.56	2.53	2200.1	2.91	2.97	3.17	800.1	1.39	1.16	1.02

REV. X2
ADEX-10+
100817
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	0	18	11	32	10	25	17	28	43	48
1	-	14	0	36	15	31	23	36	37	41	46	42
2	105	73	44	72	46	59	48	57	50	61	53	69
3	118	69	81	71	68	73	62	76	69	78	78	105
4	118	95	94	97	80	94	84	95	87	96	96	97
5	119	103	102	103	113	99	87	96	100	99	107	99
6	110	106	101	112	103	99	101	85	98	110	106	110
7	112	107	112	105	111	103	95	86	91	97	96	101
8	122	103	100	103	100	111	109	104	93	88	108	101
9	119	120	102	97	108	105	100	104	97	87	92	102
10	125	98	106	102	100	98	114	102	109	99	91	90
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.10 MHz; -14.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -21.22 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	28	24	46	21	37	28	39	57	59
1	-	14	0	34	14	33	23	40	38	45	58	47
2	98	61	36	64	36	53	38	51	43	53	47	62
3	113	49	53	54	50	57	45	56	54	55	61	64
4	122	77	72	68	61	68	61	64	64	66	63	79
5	127	74	75	71	61	72	61	69	64	66	68	76
6	109	101	89	80	73	82	71	87	69	94	68	83
7	118	95	93	92	79	92	79	94	80	87	84	96
8	113	100	105	106	101	105	106	94	92	97	90	92
9	118	111	112	107	102	107	106	129	93	96	92	100
10	113	113	113	108	118	109	111	101	101	100	95	108
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.10 MHz; -4.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -11.38 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ADEX-10+
100817
Page 5 of 5



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


ADEX-10+

Typical Performance Curves


Conversion Loss @ IF=30MHz

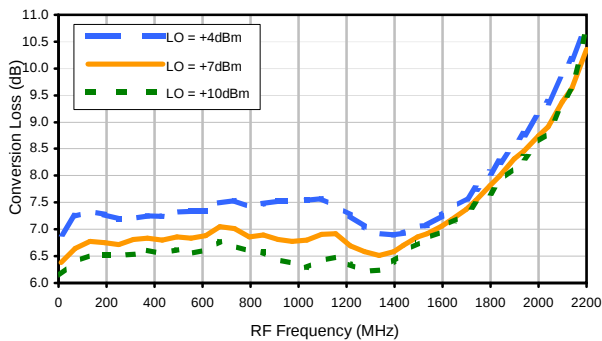


Conversion Loss vs. IF @ RF=500.1MHz

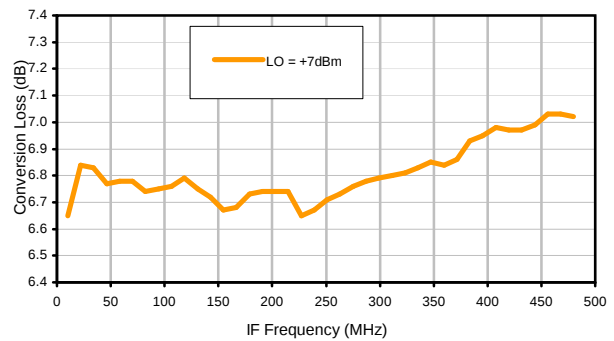


Conversion Loss vs. IF @ RF=10.1MHz

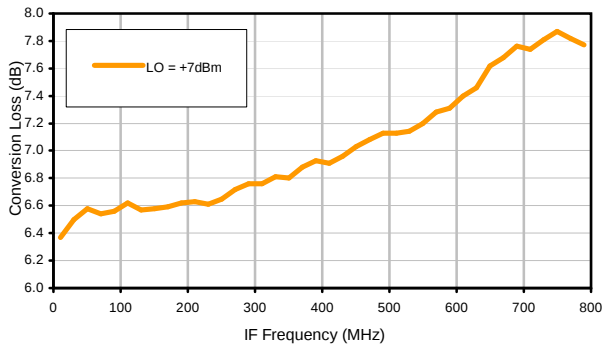


Conversion Loss vs. IF @ RF=1000.1MHz

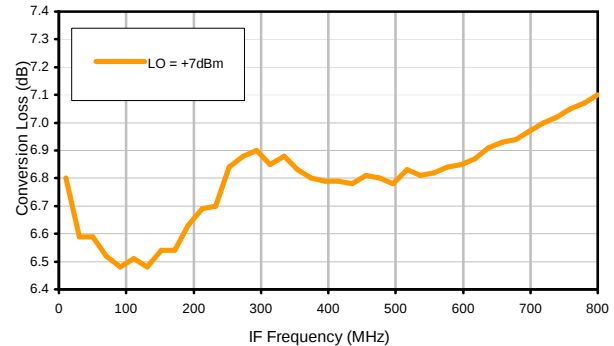

IP3 Input

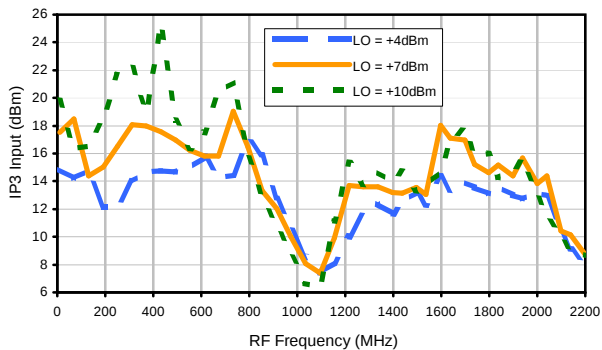

Compression @ RF IN=+1dBm

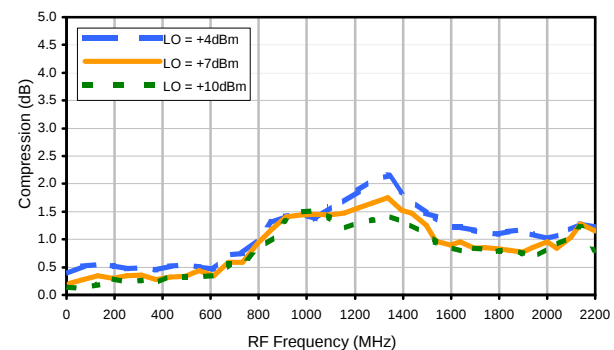

REV. X2
ADEX-10+
100817
Page 1 of 3

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

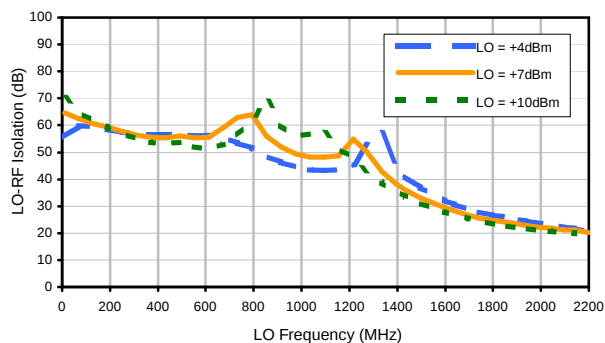


LO-IF Isolation

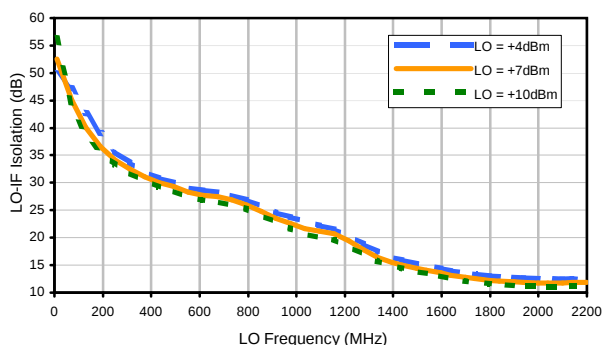


RF-IF Isolation

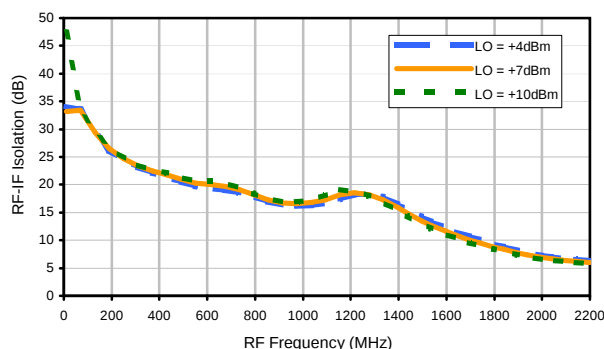


RF VSWR

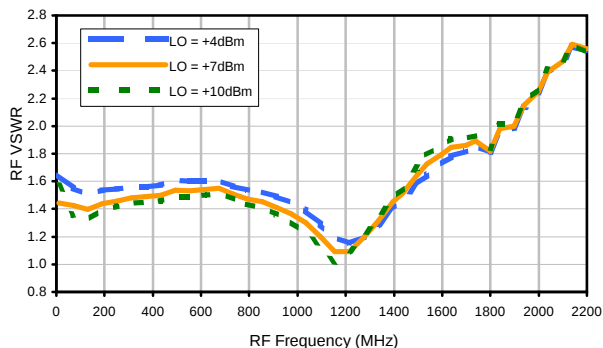

LO VSWR

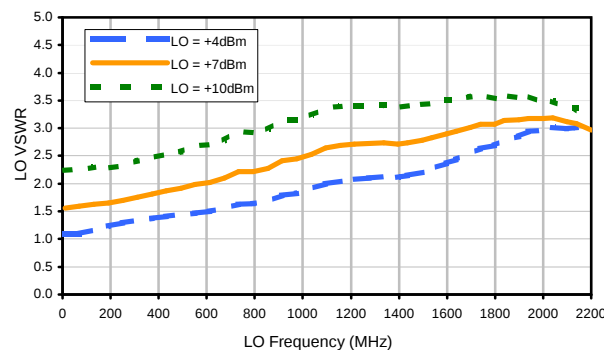

IF VSWR

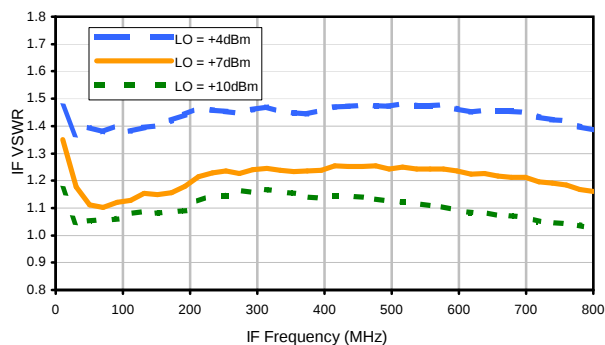

REV. X2

ADEX-10+

100817

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	0	18	11	32	10	25	17	28	43	48
1	-	14	0	36	15	31	23	36	37	41	46	42
2	105	73	44	72	46	59	48	57	50	61	53	69
3	118	69	81	71	68	73	62	76	69	78	78	105
4	118	95	94	97	80	94	84	95	87	96	96	97
5	119	103	102	103	113	99	87	96	100	99	107	99
6	110	106	101	112	103	99	101	85	98	110	106	110
7	112	107	112	105	111	103	95	86	91	97	96	101
8	122	103	100	103	100	111	109	104	93	88	108	101
9	119	120	102	97	108	105	100	104	97	87	92	102
10	125	98	106	102	100	98	114	102	109	99	91	90
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.10 MHz; -14.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -21.22 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	28	24	46	21	37	28	39	57	59
1	-	14	0	34	14	33	23	40	38	45	58	47
2	98	61	36	64	36	53	38	51	43	53	47	62
3	113	49	53	54	50	57	45	56	54	55	61	64
4	122	77	72	68	61	68	61	64	64	66	63	79
5	127	74	75	71	61	72	61	69	64	66	68	76
6	109	101	89	80	73	82	71	87	69	94	68	83
7	118	95	93	92	79	92	79	94	80	87	84	96
8	113	100	105	106	101	105	106	94	92	97	90	92
9	118	111	112	107	102	107	106	129	93	96	92	100
10	113	113	113	108	118	109	111	101	101	100	95	108
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 500.10 MHz; -4.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -11.38 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ADEX-10+
100817
Page 3 of 3



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL

SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

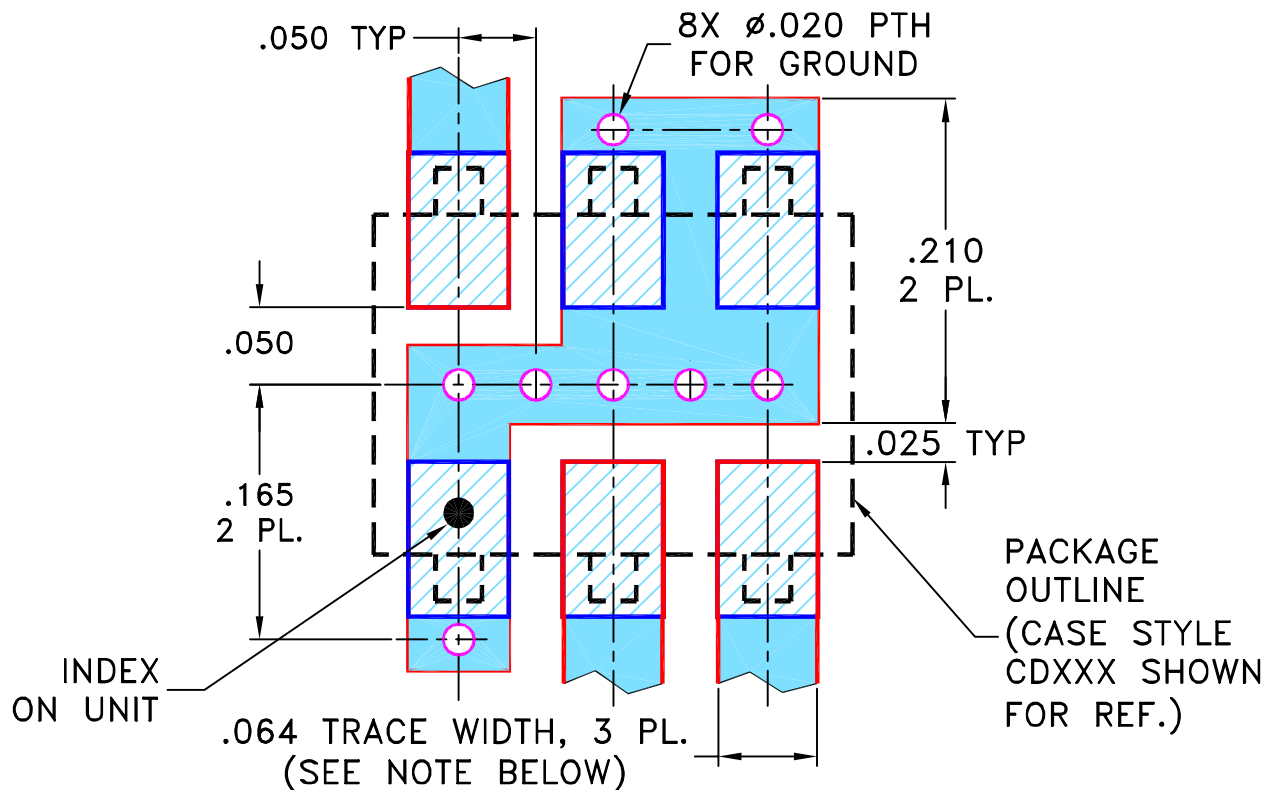

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:

1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT



Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215