

Surface Mount Frequency Mixer

Level 17 (LO Power +17 dBm) 10 to 1000 MHz

ADEX-10H+

Maximum Ratings



Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing




Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-03
Suggested PCB Layout (PL-052)

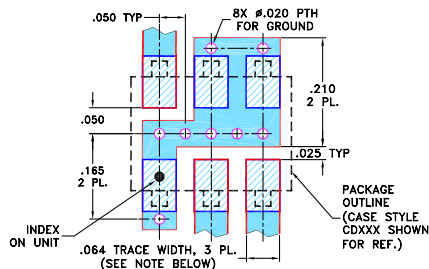

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- excellent L-R isolation, 55 dB typ.
- excellent conversion loss flatness, ±0.35 dB typ. over entire band
- low conversion loss, 7.0 dB typ.
- good VSWR, 1.4:1 typ. for LO, 1.6:1 typ. for RF, 1.4:1 typ. for IF
- good performance to 1500 MHz
- aqueous washable
- protected by U.S. Patents 6,133,525 and 6,947,717

Applications

- cellular
- PCN

Generic photo used for illustration purposes only

CASE STYLE: CD542

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f _L -f _U	IF	Mid-Band		Total Range		L	M	U	L	M	U	L	M	U				
		$\bar{X}$	σ	Max.	Range Max.										Typ. Min.	Typ. Min.	Typ. Min.	
		10-1000	DC-800	7.0	0.10	8.5 [†]	9.5 [†]	68	55	55	40	47	31	46	30	32	20	

1 dB COMP: +14 dBm typ.

[†]Conversion loss increases 0.5 dB when IF is above 150 MHz

L = low range [f_L to 10 f_U]


M = mid range [10 f_L to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.0	40.0	7.3	74.1	50.8	1.6	1.1
22.0	52.0	7.2	71.8	48.3	1.6	1.1
40.0	70.0	7.3	69.3	45.9	1.6	1.1
52.0	82.0	7.3	68.1	44.5	1.6	1.2
70.0	100.0	7.3	66.7	42.7	1.5	1.2
88.0	118.0	7.3	66.0	41.2	1.5	1.2
94.0	124.0	7.2	65.8	40.8	1.5	1.2
100.0	130.0	7.2	65.5	40.4	1.5	1.2
160.0	190.0	7.2	61.7	36.8	1.5	1.3
220.0	250.0	7.0	58.6	34.0	1.5	1.3
280.0	310.0	7.1	56.7	32.8	1.5	1.3
400.0	430.0	7.2	57.3	32.2	1.5	1.3
460.0	490.0	7.2	53.7	31.8	1.5	1.4
520.0	550.0	7.2	50.0	31.5	1.5	1.4
580.0	610.0	7.3	49.1	30.6	1.5	1.4
700.0	730.0	7.7	45.6	29.9	1.6	1.5
760.0	790.0	7.8	44.2	28.5	1.6	1.7
820.0	850.0	7.7	41.9	26.5	1.5	1.7
940.0	970.0	7.5	36.6	23.5	1.4	1.9
1000.0	1030.0	7.4	35.4	22.5	1.3	2.0







Electrical Schematic

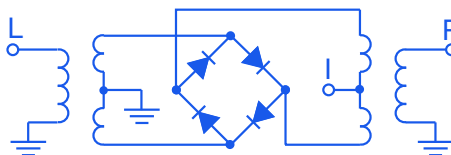

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M158496
ADEX-10H+
ED-9813/1
DJ/TD/CP/AM
220922
Page 1 of 2

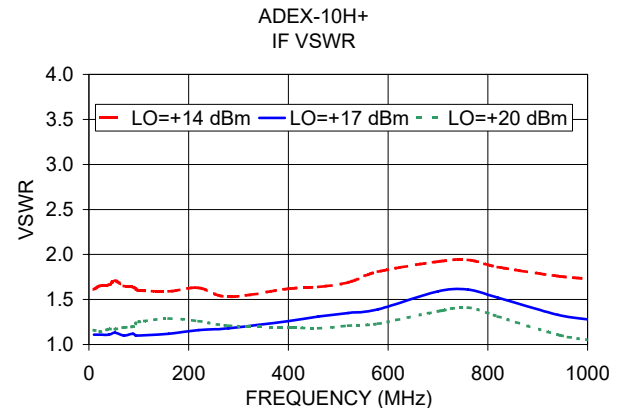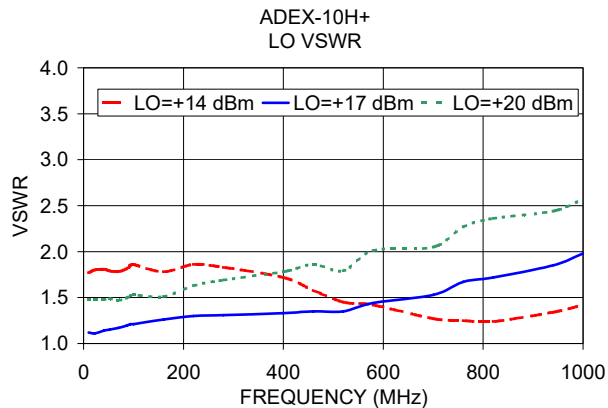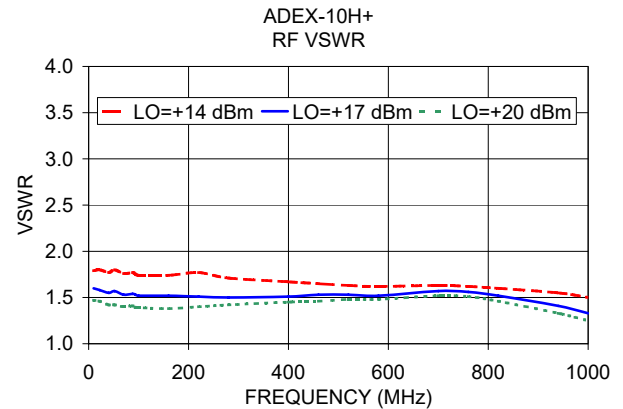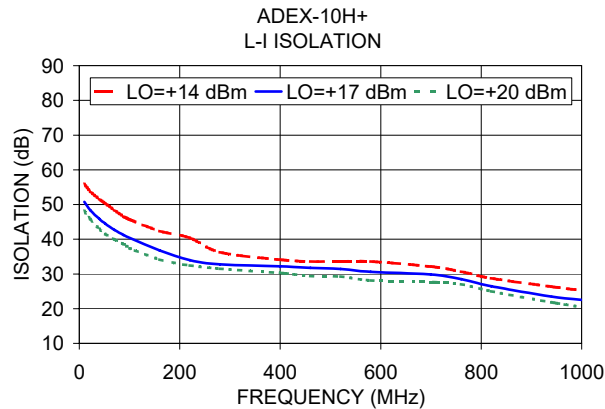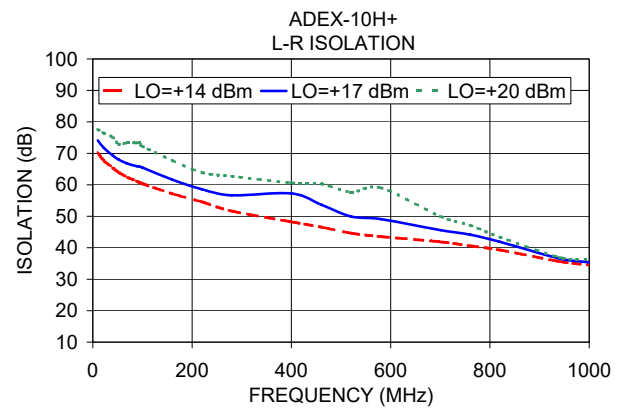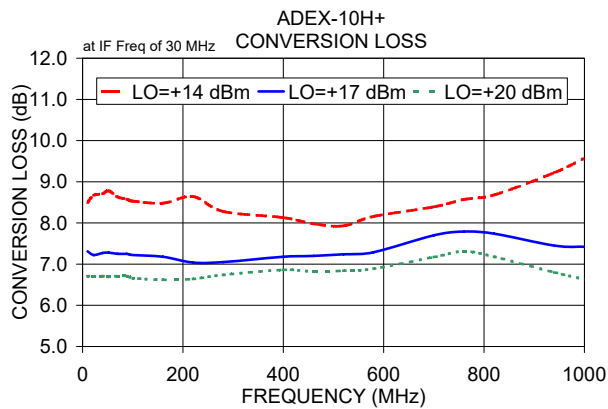

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

ADEX-10H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	8.84	7.09	6.52
60.1	90.1	8.93	7.53	6.94
110.1	140.1	9.16	7.51	6.85
160.1	190.1	8.90	7.40	6.85
210.1	240.1	8.86	7.21	6.78
260.1	290.1	8.49	7.25	6.85
310.1	340.1	8.54	7.26	6.86
360.1	390.1	8.40	7.34	6.87
410.1	440.1	8.35	7.44	6.97
460.1	490.1	8.27	7.37	6.95
510.1	540.1	8.32	7.22	6.84
560.1	590.1	8.49	7.26	6.84
610.1	640.1	8.78	7.58	6.98
660.1	690.1	8.96	7.87	7.16
710.1	740.1	9.23	8.23	7.52
760.1	790.1	9.30	8.27	7.58
810.1	840.1	9.17	8.06	7.36
860.1	890.1	8.71	7.66	7.06
910.1	940.1	8.32	7.37	6.82
960.1	990.1	7.88	6.99	6.53
1010.1	1040.1	7.66	6.79	6.39
1060.1	1090.1	7.55	6.69	6.31
1110.1	1140.1	7.63	6.78	6.38
1160.1	1190.1	7.65	6.88	6.47
1210.1	1240.1	7.73	7.04	6.62
1260.1	1290.1	7.83	7.19	6.78
1300.1	1330.1	8.04	7.38	6.98
1350.1	1380.1	8.24	7.49	7.12
1390.1	1420.1	8.62	7.73	7.33
1440.1	1470.1	9.02	7.93	7.49
1480.1	1510.1	9.60	8.21	7.70
1530.1	1560.1	10.09	8.54	7.95
1570.1	1600.1	10.67	8.88	8.18
1620.1	1650.1	11.04	9.22	8.48
1660.1	1690.1	11.61	9.64	8.76
1710.1	1740.1	11.96	10.04	9.12
1750.1	1780.1	12.60	10.42	9.40
1800.1	1830.1	13.15	10.86	9.80
1840.1	1870.1	14.00	11.28	10.03
1890.1	1920.1	14.86	11.99	10.60

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	19.09	24.12	28.24
60.1	90.1	20.49	24.74	27.69
110.1	140.1	19.83	24.34	28.54
160.1	190.1	20.54	25.69	27.00
210.1	240.1	20.73	28.71	26.32
260.1	290.1	21.74	25.88	34.42
310.1	340.1	21.59	23.00	26.68
360.1	390.1	23.56	25.18	27.94
410.1	440.1	22.70	24.66	22.74
460.1	490.1	20.65	24.39	25.17
510.1	540.1	20.46	30.77	34.75
560.1	590.1	22.15	27.04	28.34
610.1	640.1	21.33	21.59	27.92
660.1	690.1	19.47	18.60	26.60
710.1	740.1	18.17	17.56	20.02
760.1	790.1	17.56	18.42	20.22
810.1	840.1	18.05	20.80	23.80
860.1	890.1	20.35	23.96	29.71
910.1	940.1	24.58	33.43	24.92
960.1	990.1	25.65	24.78	21.28
1010.1	1040.1	21.32	22.00	20.72
1060.1	1090.1	19.44	21.57	22.03
1110.1	1140.1	18.44	22.21	24.04
1160.1	1190.1	18.25	24.00	26.74
1210.1	1240.1	19.09	26.43	28.05
1260.1	1290.1	20.26	27.58	27.65
1300.1	1330.1	21.15	28.41	28.82
1350.1	1380.1	22.27	26.29	30.20
1390.1	1420.1	23.31	25.01	26.68
1440.1	1470.1	24.62	24.16	24.79
1480.1	1510.1	26.05	23.73	24.30
1530.1	1560.1	24.02	23.52	24.54
1570.1	1600.1	22.43	23.50	24.95
1620.1	1650.1	21.04	23.40	24.96
1660.1	1690.1	20.04	23.58	24.62
1710.1	1740.1	19.59	23.35	24.74
1750.1	1780.1	19.26	22.17	23.80
1800.1	1830.1	19.00	20.91	22.48
1840.1	1870.1	18.37	19.57	20.91
1890.1	1920.1	17.06	19.36	19.29

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	-0.05	0.02	0.03
60.1	90.1	-0.13	-0.11	-0.05
110.1	140.1	-0.23	-0.09	0.00
160.1	190.1	-0.11	0.01	0.03
210.1	240.1	-0.07	0.09	0.05
260.1	290.1	0.15	0.06	0.06
310.1	340.1	0.14	0.09	0.08
360.1	390.1	0.24	0.08	0.16
410.1	440.1	0.28	-0.02	0.11
460.1	490.1	0.39	0.07	0.14
510.1	540.1	0.42	0.25	0.20
560.1	590.1	0.27	0.33	0.28
610.1	640.1	0.12	0.25	0.33
660.1	690.1	0.04	0.15	0.37
710.1	740.1	-0.09	-0.01	0.25
760.1	790.1	-0.08	-0.02	0.25
810.1	840.1	0.08	0.19	0.43
860.1	890.1	0.50	0.54	0.68
910.1	940.1	0.93	0.79	0.81
960.1	990.1	1.34	1.05	0.96
1010.1	1040.1	1.59	1.20	1.00
1060.1	1090.1	1.76	1.30	1.04
1110.1	1140.1	1.73	1.25	0.99
1160.1	1190.1	1.73	1.20	0.98
1210.1	1240.1	1.76	1.22	1.02
1260.1	1290.1	1.88	1.32	1.12
1300.1	1330.1	1.82	1.31	1.10
1350.1	1380.1	1.91	1.44	1.16
1390.1	1420.1	1.85	1.41	1.12
1440.1	1470.1	1.78	1.42	1.12
1480.1	1510.1	1.66	1.39	1.09
1530.1	1560.1	1.51	1.31	1.03
1570.1	1600.1	1.43	1.25	1.00
1620.1	1650.1	1.35	1.12	0.95
1660.1	1690.1	1.32	1.10	0.97
1710.1	1740.1	1.26	1.03	0.97
1750.1	1780.1	1.23	1.13	1.05
1800.1	1830.1	1.14	1.16	1.12
1840.1	1870.1	0.89	1.25	1.23
1890.1	1920.1	0.70	1.11	1.21

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm) +17
490.0	10.1	7.76
479.8	20.3	7.74
469.6	30.5	7.77
459.4	40.7	7.71
449.1	51.0	7.76
438.9	61.2	7.72
428.7	71.4	7.62
418.5	81.6	7.63
408.3	91.8	7.65
398.1	102.0	7.52
387.9	112.2	7.53
377.7	122.4	7.57
367.4	132.7	7.38
357.2	142.9	7.57
347.0	153.1	7.49
336.8	163.3	7.36
326.6	173.5	7.40
316.4	183.7	7.30
306.2	193.9	7.19
296.0	204.1	7.24
285.7	214.4	7.17
275.5	224.6	7.05
265.3	234.8	7.15
255.1	245.0	7.08
234.7	265.4	6.99
224.5	275.6	6.87
204.0	296.1	7.02
193.8	306.3	7.01
173.4	326.7	6.99
163.2	336.9	6.99
142.8	357.3	7.07
132.6	367.5	7.02
112.1	388.0	7.16
101.9	398.2	7.16
81.5	418.6	7.22
71.3	428.8	7.29
50.9	449.2	7.37
40.6	459.5	7.32
20.2	479.9	7.33
10.0	490.1	7.33

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10MHz (dB)
		@LO (dBm) +17
10.1	20.1	7.08
50.1	60.1	7.09
90.1	100.1	6.91
130.1	140.1	7.16
170.1	180.1	6.99
210.1	220.1	6.98
250.1	260.1	7.12
290.1	300.1	7.26
330.1	340.1	7.32
370.1	380.1	7.33
410.1	420.1	7.59
450.1	460.1	7.57
490.1	500.1	7.58
530.1	540.1	7.72
570.1	580.1	7.91
610.1	620.1	8.13
650.1	660.1	8.36
690.1	700.1	8.46
730.1	740.1	8.51
770.1	780.1	8.47
810.1	820.1	8.43
850.1	860.1	8.16
890.1	900.1	7.96
930.1	940.1	7.98
970.1	980.1	7.86
1010.1	1020.1	7.88
1050.1	1060.1	8.01
1090.1	1100.1	8.26
1130.1	1140.1	8.53
1170.1	1180.1	8.83
1210.1	1220.1	8.97
1250.1	1260.1	9.20
1290.1	1300.1	9.54
1330.1	1340.1	9.91
1370.1	1380.1	10.40
1410.1	1420.1	10.83
1450.1	1460.1	11.04
1490.1	1500.1	11.38
1530.1	1540.1	11.50
1570.1	1580.1	11.93

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)
		@LO (dBm) +17
990.0	10.1	8.41
970.0	30.1	8.28
950.0	50.1	8.15
930.0	70.1	8.04
910.0	90.1	7.98
890.0	110.1	7.90
870.0	130.1	7.65
850.0	150.1	7.63
830.0	170.1	7.52
810.0	190.1	7.38
790.0	210.1	7.37
770.0	230.1	7.29
750.0	250.1	7.31
730.0	270.1	7.21
710.0	290.1	7.24
690.0	310.1	7.24
670.0	330.1	7.17
650.0	350.1	7.24
630.0	370.1	7.19
610.0	390.1	7.25
570.0	430.1	7.13
550.0	450.1	7.17
510.0	490.1	7.26
490.0	510.1	7.14
450.0	550.1	7.04
430.0	570.1	7.07
390.0	610.1	7.27
370.0	630.1	7.29
330.0	670.1	7.52
310.0	690.1	7.55
270.0	730.1	7.79
250.0	750.1	7.90
210.0	790.1	7.97
190.0	810.1	7.76
150.0	850.1	7.60
130.0	870.1	7.34
90.0	910.1	7.00
70.0	930.1	6.89
30.0	970.1	6.75
10.0	990.1	6.79

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
40.1	69.96	70.42	69.17	65.42	45.94	40.13
90.1	66.61	69.11	68.51	54.95	40.77	35.73
140.1	62.83	70.02	77.69	60.64	38.24	32.67
190.1	62.31	73.72	64.71	57.97	37.80	32.74
240.1	61.01	67.40	61.87	45.84	38.84	32.41
290.1	66.50	60.73	55.82	38.85	37.82	32.16
340.1	71.77	58.87	54.14	34.43	34.50	30.73
390.1	69.40	55.37	50.15	30.71	31.36	29.85
440.1	62.51	51.19	47.80	27.39	28.45	29.01
490.1	61.75	53.38	48.34	24.50	25.53	26.64
540.1	53.27	57.36	47.32	22.39	23.50	24.47
590.1	47.63	52.54	45.47	20.94	22.40	23.60
640.1	43.63	46.23	43.30	19.73	21.84	23.46
690.1	40.27	41.59	40.90	18.70	21.49	23.58
740.1	38.02	39.54	39.74	17.80	21.01	23.93
790.1	36.86	39.34	39.61	16.91	20.32	23.19
840.1	36.92	40.57	40.20	15.91	18.94	21.00
890.1	37.29	42.27	41.44	14.85	17.50	19.37
940.1	37.21	42.92	42.35	13.59	16.11	18.04
990.1	35.84	41.10	42.18	12.63	15.10	17.12
1040.1	33.66	37.70	39.25	11.73	14.10	16.20
1090.1	31.99	35.23	36.50	11.15	13.47	15.60
1140.1	30.54	33.25	34.25	10.56	12.81	14.90
1190.1	29.41	31.94	33.12	10.39	12.60	14.68
1240.1	28.52	31.12	32.64	10.13	12.38	14.46
1290.1	27.67	30.40	32.38	9.91	12.23	14.31
1330.1	26.44	29.30	31.47	9.82	12.24	14.34
1380.1	25.62	28.55	31.00	9.73	12.24	14.41
1420.1	24.52	27.44	30.07	9.77	12.36	14.68
1470.1	23.93	26.63	29.29	9.83	12.41	14.84
1510.1	23.34	25.90	28.74	9.94	12.57	15.15
1560.1	22.74	25.18	28.00	10.12	12.76	15.38
1600.1	22.12	24.56	27.40	10.09	12.79	15.55
1650.1	21.30	23.89	26.75	10.28	13.06	15.85
1690.1	20.66	23.38	26.31	10.19	13.03	15.94
1740.1	19.99	22.86	25.81	10.43	13.32	16.24
1780.1	19.57	22.47	25.46	10.31	13.16	16.15
1830.1	19.03	21.84	24.70	10.51	13.24	16.10
1870.1	18.51	21.06	23.80	10.31	12.78	15.50
1920.1	18.08	20.28	22.73	10.48	12.66	15.10

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	49.60	50.64	50.61
60.1	90.1	34.96	35.41	35.74
110.1	140.1	30.19	30.74	31.11
160.1	190.1	27.39	28.05	28.34
210.1	240.1	25.45	26.24	26.54
260.1	290.1	24.50	25.09	25.49
310.1	340.1	23.28	24.06	24.51
360.1	390.1	22.59	23.39	24.17
410.1	440.1	21.99	22.90	23.44
460.1	490.1	21.06	21.81	22.64
510.1	540.1	20.19	21.50	22.59
560.1	590.1	19.43	20.96	22.15
610.1	640.1	19.02	20.34	21.35
660.1	690.1	18.72	19.67	20.29
710.1	740.1	18.16	18.76	19.20
760.1	790.1	17.38	17.66	17.88
810.1	840.1	16.68	16.88	16.90
860.1	890.1	16.09	16.12	16.05
910.1	940.1	15.64	15.67	15.68
960.1	990.1	15.49	15.63	15.80
1010.1	1040.1	15.56	15.82	16.11
1060.1	1090.1	15.69	16.02	16.34
1110.1	1140.1	15.76	16.07	16.18
1160.1	1190.1	15.62	15.79	15.71
1210.1	1240.1	15.39	15.32	15.06
1260.1	1290.1	14.85	14.70	14.30
1300.1	1330.1	14.40	14.17	13.67
1350.1	1380.1	13.54	13.26	12.84
1390.1	1420.1	12.92	12.50	12.07
1440.1	1470.1	12.02	11.41	10.98
1480.1	1510.1	11.42	10.61	10.14
1530.1	1560.1	10.56	9.71	9.27
1570.1	1600.1	9.96	9.06	8.60
1620.1	1650.1	9.11	8.29	7.87
1660.1	1690.1	8.72	7.89	7.43
1710.1	1740.1	8.07	7.34	6.97
1750.1	1780.1	7.76	7.02	6.69
1800.1	1830.1	7.27	6.65	6.41
1840.1	1870.1	7.04	6.43	6.23
1890.1	1920.1	6.58	6.05	5.95

Frequency Mixer

ADEX-10H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
10.1	40.1	1.94	1.63	1.48	40.1	1.94	1.07	1.95	10.1	1.61	1.24	1.06
60.1	90.1	1.83	1.61	1.46	90.1	1.70	1.09	1.52	40.1	1.61	1.23	1.05
110.1	140.1	1.86	1.61	1.46	140.1	1.79	1.10	1.54	60.1	1.64	1.27	1.10
160.1	190.1	1.83	1.59	1.46	190.1	1.70	1.13	1.48	90.1	1.59	1.22	1.05
210.1	240.1	1.83	1.58	1.47	240.1	1.77	1.10	1.51	110.1	1.67	1.30	1.14
260.1	290.1	1.78	1.58	1.47	290.1	1.68	1.06	1.50	140.1	1.61	1.26	1.09
310.1	340.1	1.80	1.59	1.48	340.1	1.65	1.05	1.54	160.1	1.69	1.34	1.16
360.1	390.1	1.79	1.60	1.47	390.1	1.55	1.06	1.56	190.1	1.63	1.29	1.13
410.1	440.1	1.76	1.60	1.49	440.1	1.49	1.09	1.60	210.1	1.72	1.37	1.18
460.1	490.1	1.74	1.57	1.48	490.1	1.42	1.11	1.61	240.1	1.67	1.33	1.16
510.1	540.1	1.70	1.52	1.45	540.1	1.34	1.16	1.65	260.1	1.74	1.39	1.21
560.1	590.1	1.72	1.53	1.46	590.1	1.25	1.22	1.71	290.1	1.70	1.36	1.18
610.1	640.1	1.71	1.54	1.47	640.1	1.19	1.27	1.75	310.1	1.73	1.39	1.20
660.1	690.1	1.69	1.55	1.47	690.1	1.14	1.33	1.81	340.1	1.75	1.41	1.22
710.1	740.1	1.65	1.53	1.47	740.1	1.11	1.35	1.83	360.1	1.75	1.41	1.21
760.1	790.1	1.64	1.54	1.47	790.1	1.09	1.36	1.84	390.1	1.73	1.40	1.21
810.1	840.1	1.57	1.48	1.41	840.1	1.09	1.34	1.83	410.1	1.72	1.39	1.20
860.1	890.1	1.51	1.42	1.35	890.1	1.12	1.37	1.86	440.1	1.76	1.43	1.23
910.1	940.1	1.40	1.31	1.25	940.1	1.19	1.42	1.90	460.1	1.71	1.39	1.19
960.1	990.1	1.32	1.23	1.16	990.1	1.30	1.49	1.94	490.1	1.72	1.40	1.20
1010.1	1040.1	1.21	1.11	1.07	1040.1	1.43	1.58	2.00	510.1	1.68	1.37	1.18
1060.1	1090.1	1.14	1.04	1.08	1090.1	1.56	1.68	2.07	540.1	1.70	1.39	1.20
1110.1	1140.1	1.07	1.05	1.14	1140.1	1.68	1.79	2.14	560.1	1.66	1.35	1.17
1160.1	1190.1	1.07	1.08	1.15	1190.1	1.79	1.90	2.20	590.1	1.66	1.36	1.18
1210.1	1240.1	1.12	1.14	1.18	1240.1	1.90	1.99	2.28	610.1	1.61	1.32	1.15
1260.1	1290.1	1.18	1.18	1.21	1290.1	2.00	2.07	2.32	640.1	1.61	1.32	1.16
1300.1	1330.1	1.27	1.28	1.31	1330.1	2.10	2.14	2.39	660.1	1.60	1.31	1.14
1350.1	1380.1	1.37	1.40	1.42	1380.1	2.22	2.22	2.44	690.1	1.56	1.28	1.12
1390.1	1420.1	1.47	1.51	1.54	1420.1	2.35	2.29	2.47	710.1	1.52	1.25	1.10
1440.1	1470.1	1.62	1.66	1.68	1470.1	2.49	2.39	2.51	740.1	1.53	1.25	1.11
1480.1	1510.1	1.72	1.77	1.79	1510.1	2.66	2.47	2.55	760.1	1.52	1.24	1.09
1530.1	1560.1	1.88	1.91	1.91	1560.1	2.75	2.55	2.57	790.1	1.47	1.20	1.06
1570.1	1600.1	2.00	2.01	2.01	1600.1	2.89	2.64	2.60	810.1	1.43	1.17	1.06
1620.1	1650.1	2.17	2.15	2.13	1650.1	3.03	2.74	2.65	840.1	1.44	1.18	1.07
1660.1	1690.1	2.31	2.25	2.22	1690.1	3.18	2.87	2.70	860.1	1.43	1.16	1.05
1710.1	1740.1	2.42	2.36	2.32	1740.1	3.31	2.97	2.74	890.1	1.39	1.14	1.03
1750.1	1780.1	2.48	2.40	2.36	1780.1	3.41	3.10	2.78	910.1	1.35	1.10	1.06
1800.1	1830.1	2.53	2.46	2.43	1830.1	3.56	3.22	2.83	940.1	1.34	1.10	1.06
1840.1	1870.1	2.54	2.47	2.44	1870.1	3.67	3.37	2.89	960.1	1.34	1.09	1.06
1890.1	1920.1	2.59	2.52	2.51	1920.1	3.84	3.57	2.99	990.1	1.32	1.08	1.07

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+1	15	+2	19	16	41	28	49	37	52
1	-	15	+0	46	16	34	32	43	42	61	47	68
2	67	51	34	56	35	53	37	59	52	60	56	68
3	>90	69	68	69	60	69	59	>82	71	>82	80	>82
4	>90	>82	73	>82	73	76	73	76	74	>82	80	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
7	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
9	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -1.00 dBm.
LO IN: 530 MHz; +17.00 dBm
IF OUT: 30 MHz; -8.22 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	26	10	29	28	51	43	59	60	64
1	-	15	+0	39	17	35	35	44	42	64	55	73
2	47	41	27	47	26	61	29	49	42	55	58	67
3	70	49	81	49	55	52	47	56	54	62	58	76
4	>90	71	52	63	51	56	68	61	59	66	61	64
5	>90	68	62	64	60	66	56	72	62	87	72	77
6	>90	83	78	74	68	70	62	67	62	69	64	75
7	>90	>92	>92	83	76	86	73	81	76	78	75	80
8	>90	>92	>92	90	86	87	76	84	77	89	84	>92
9	>90	>92	>92	>92	>92	>92	86	82	88	80	82	86
10	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	90	86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; 9.00 dBm.
LO IN: 530 MHz; +17.00 dBm
IF OUT: 30 MHz; 1.74 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


ADEX-10H+

Typical Performance Curves


Conversion Loss @ IF=30MHz

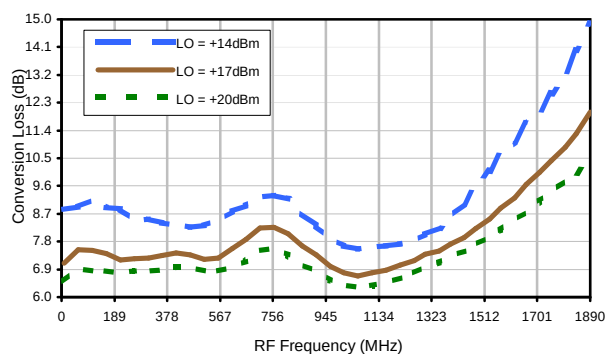


Conversion Loss vs. IF @ RF=500.1MHz

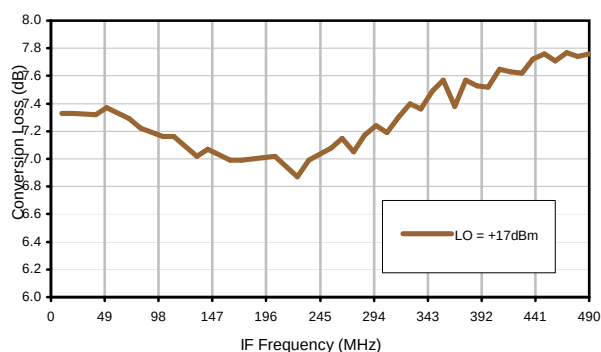


Conversion Loss vs. IF @ RF=10MHz

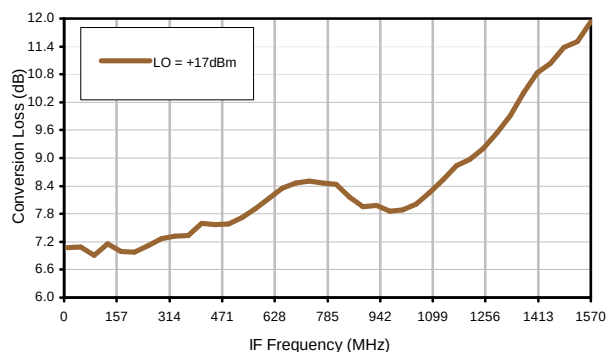


Conversion Loss vs. IF @ RF=1000.1MHz

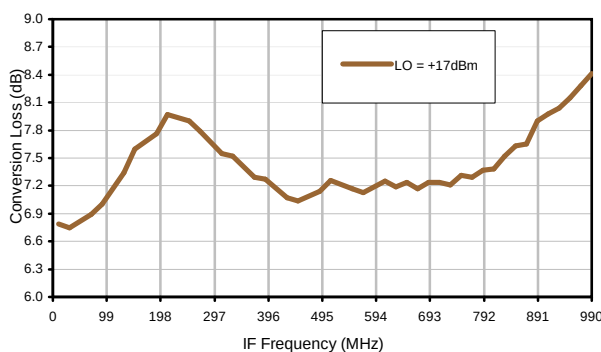

IP3 Input

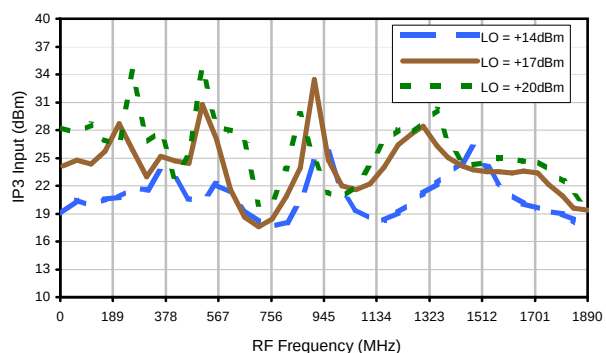


Compression @ RF IN=+14dBm

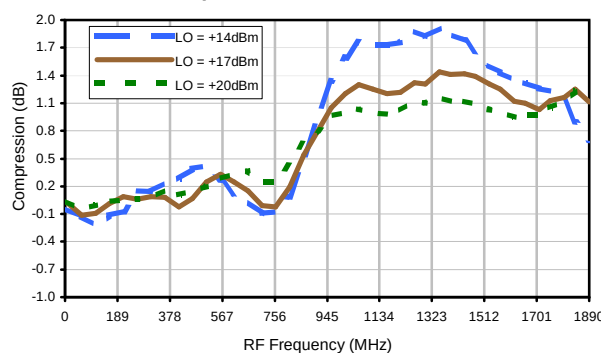


Typical Performance Curves


LO-RF Isolation

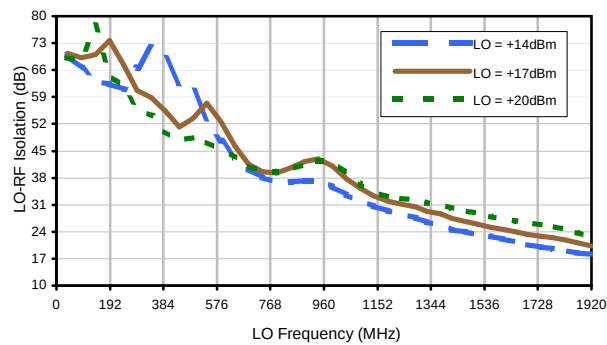


LO-IF Isolation

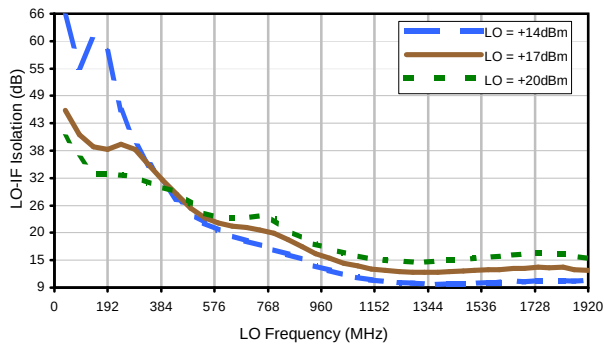


RF-IF Isolation

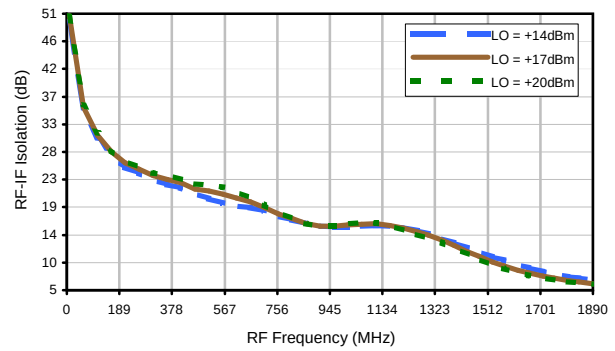


RF VSWR

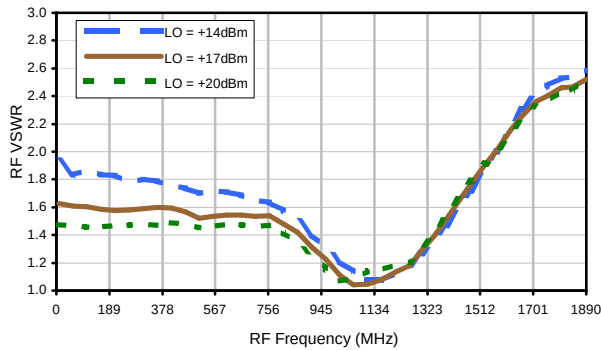

LO VSWR

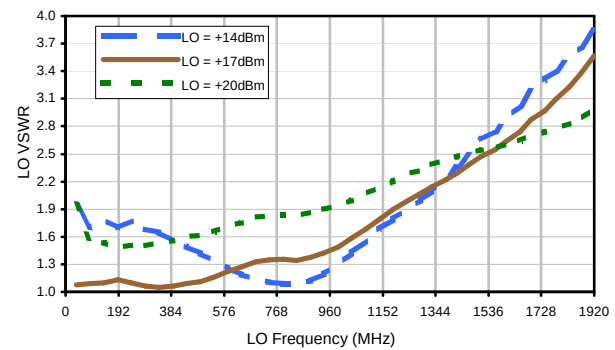

IF VSWR

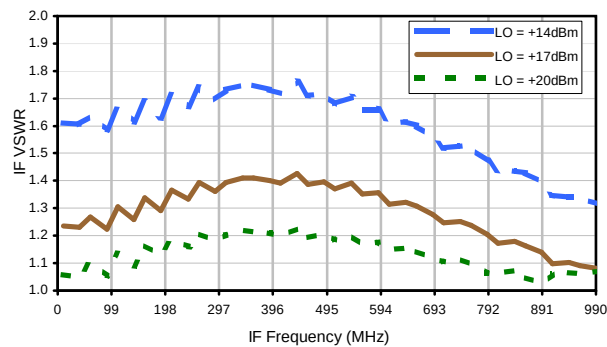

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+1	15	+2	19	16	41	28	49	37	52
1	-	15	+0	46	16	34	32	43	42	61	47	68
2	67	51	34	56	35	53	37	59	52	60	56	68
3	>90	69	68	69	60	69	59	>82	71	>82	80	>82
4	>90	>82	73	>82	73	76	73	76	74	>82	80	>82
5	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
6	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
7	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
8	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
9	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
10	>90	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82	>82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; -1.00 dBm.
LO IN: 530 MHz; +17.00 dBm
IF OUT: 30 MHz; -8.22 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	9	26	10	29	28	51	43	59	60	64
1	-	15	+0	39	17	35	35	44	42	64	55	73
2	47	41	27	47	26	61	29	49	42	55	58	67
3	70	49	81	49	55	52	47	56	54	62	58	76
4	>90	71	52	63	51	56	68	61	59	66	61	64
5	>90	68	62	64	60	66	56	72	62	87	72	77
6	>90	83	78	74	68	70	62	67	62	69	64	75
7	>90	>92	>92	83	76	86	73	81	76	78	75	80
8	>90	>92	>92	90	86	87	76	84	77	89	84	>92
9	>90	>92	>92	>92	>92	>92	86	82	88	80	82	86
10	>90	>92	>92	>92	>92	>92	>92	>92	>92	>92	90	86
	RF CAL	0	1	2	3	4	5	6	7	8	9	10



LO HARMONICS ORDER

Test conditions: RF IN: 500 MHz; 9.00 dBm.
LO IN: 530 MHz; +17.00 dBm
IF OUT: 30 MHz; 1.74 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

CD541
CD542
CD636
CD637

Outline Dimensions

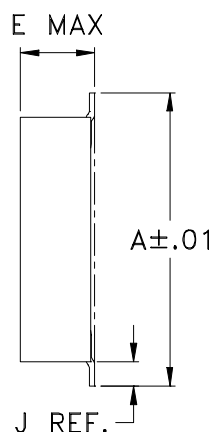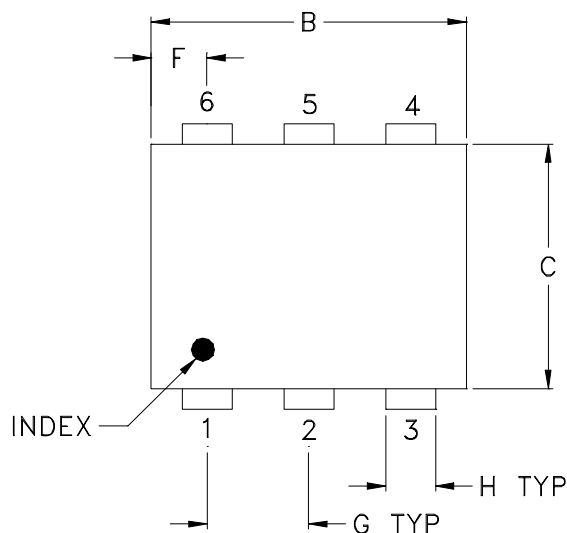

PCB Land Pattern

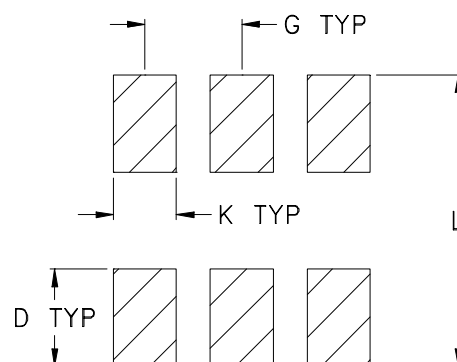

Suggested Layout,
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

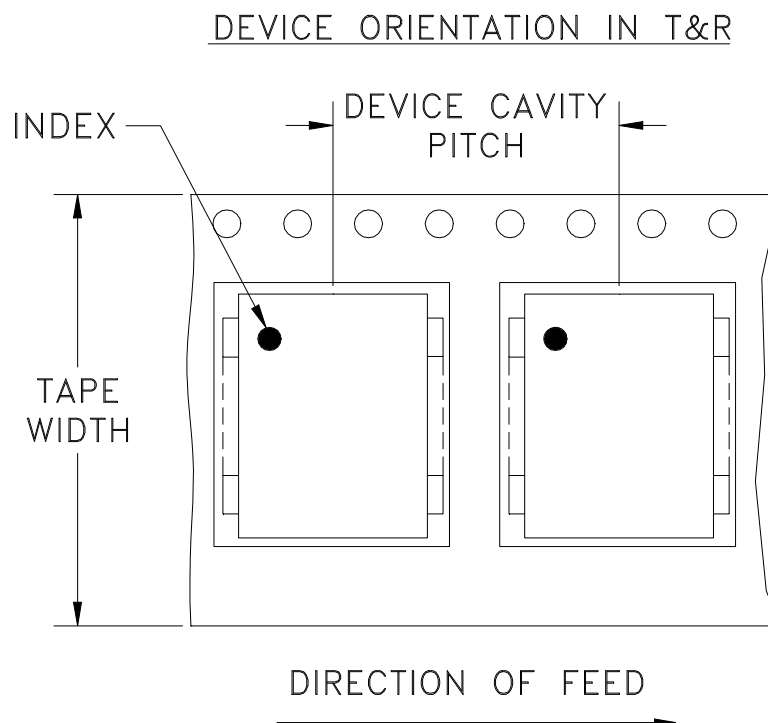

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

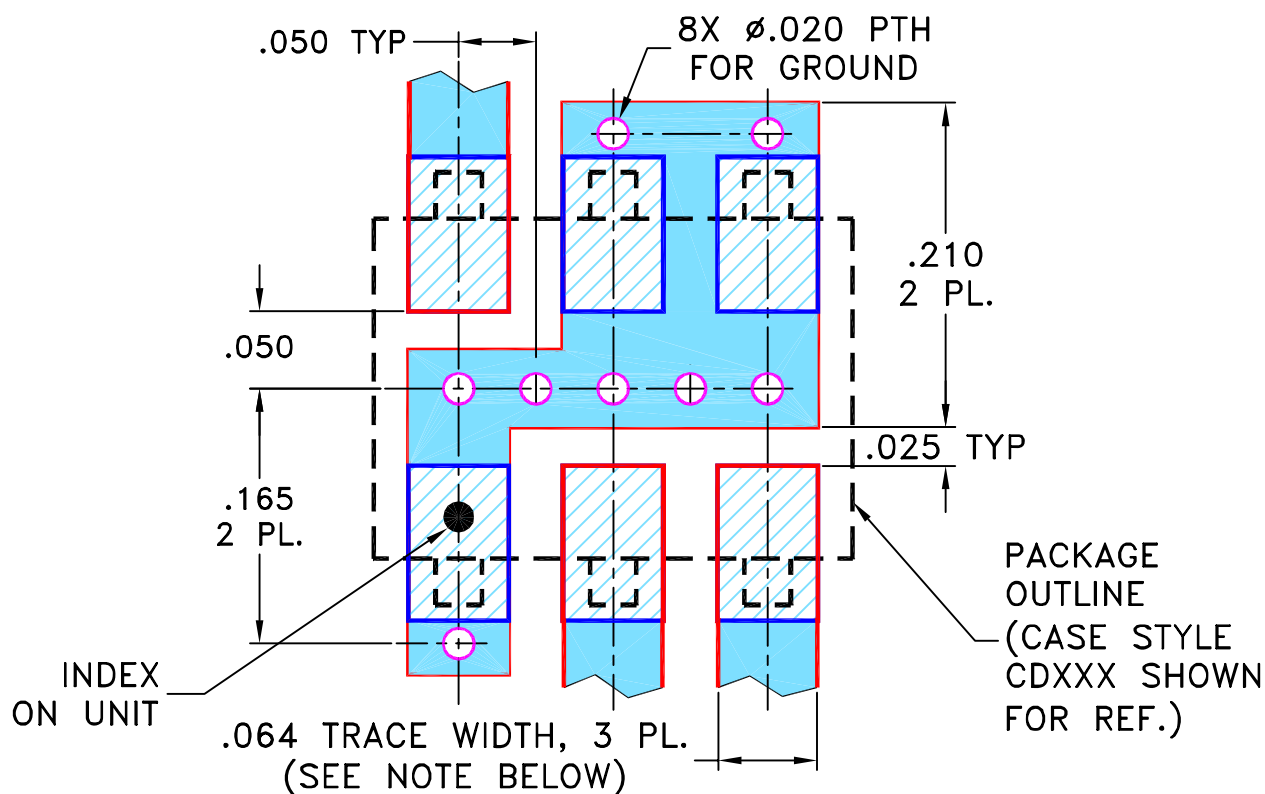

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:

1 OF 1



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT

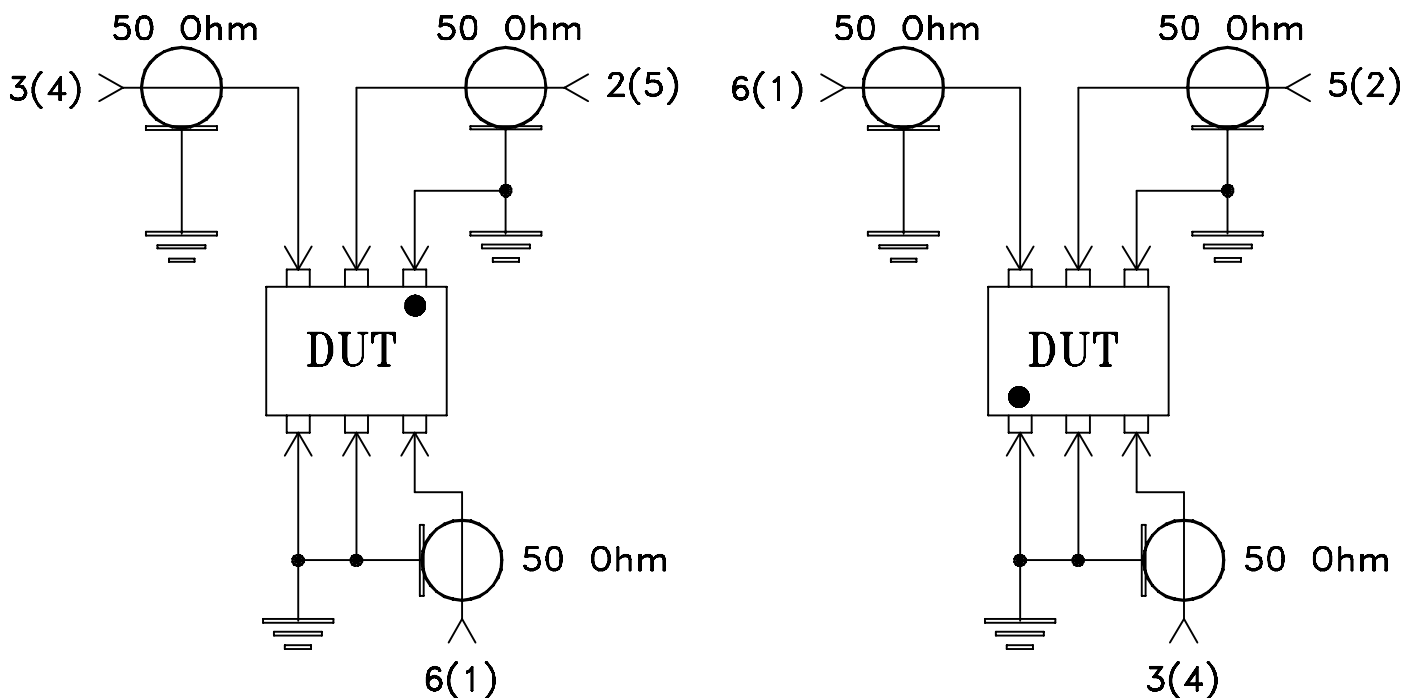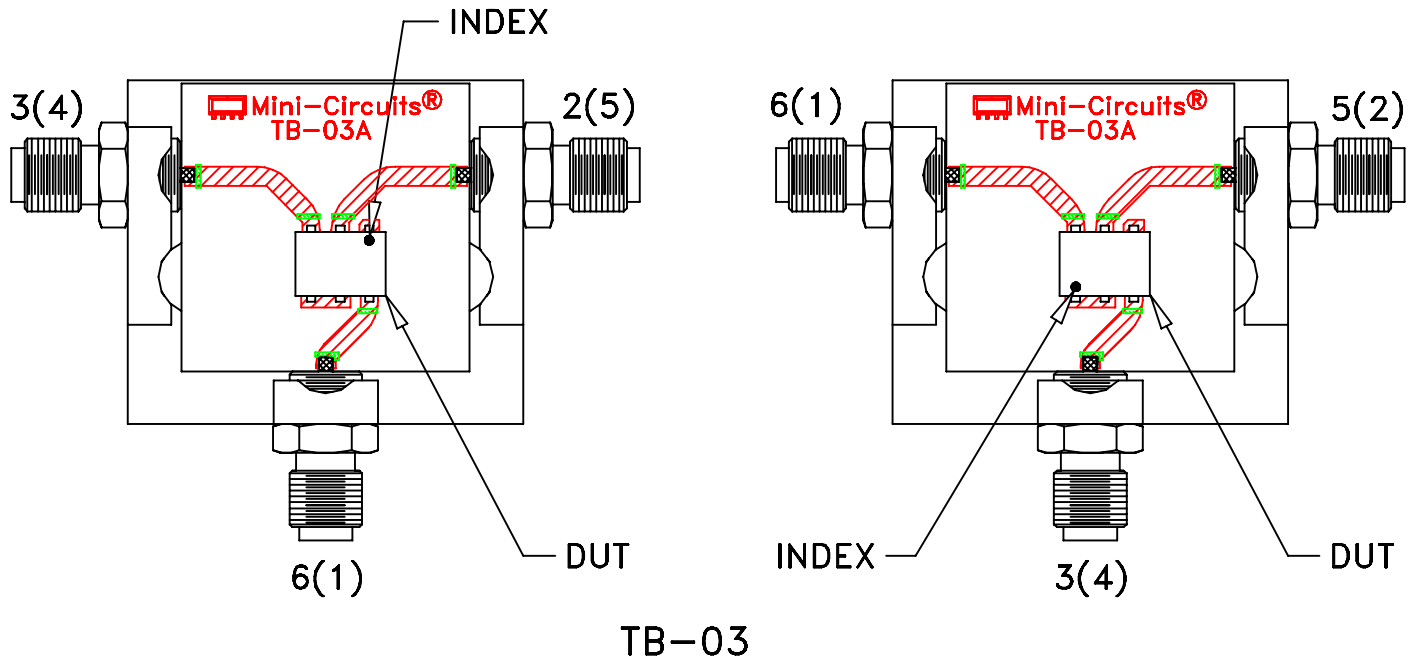

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215