

Low Pass Filter

BLP-100-75+

75Ω DC to 98 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	

Features

- rugged shielded case
- other standard and custom BLP models available with wide selection of fco

Applications

- test equipment
- lab use
- video equipment



Generic photo used for illustration purposes only


CASE STYLE: FF55

Connectors	Model
BNC	BLP-100-75+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

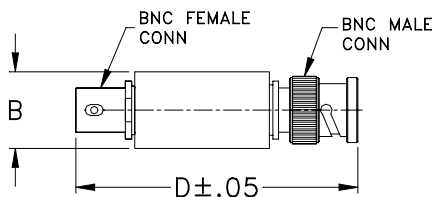


Outline Dimensions (inch/mm)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0


Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)	VSWR (:1)
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB) (loss > 40 dB)	Passband Typ. Stopband Typ.
DC-98	108	146-189 189-400	1.7 18

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
$\bar{x}$	σ			
1.00	1.00	0.00	55.39	
14.40	0.09	0.00	31.44	
27.80	0.14	0.00	26.34	
41.10	0.18	0.01	25.69	
54.50	0.22	0.01	30.30	
67.90	0.29	0.01	22.73	
81.30	0.45	0.04	16.35	
98.00	0.62	0.07	19.63	
108.00	2.25	0.40	6.07	
118.00	7.71	0.73	1.47	
123.60	11.47	0.75	0.78	
129.20	15.15	0.72	0.50	
134.80	18.64	0.71	0.37	
140.40	21.90	0.69	0.30	
146.00	24.97	0.68	0.26	
151.60	27.86	0.69	0.23	
159.10	31.52	0.70	0.21	
166.60	34.94	0.73	0.19	
174.00	38.15	0.75	0.18	
181.50	41.21	0.85	0.18	
189.00	44.21	0.98	0.17	
196.50	47.04	1.03	0.17	
221.90	56.41	1.79	0.16	
247.40	67.24	4.43	0.14	
272.80	77.49	6.61	0.11	
298.30	75.88	6.64	0.10	
323.70	73.99	6.37	0.08	
349.10	71.06	5.19	0.08	
374.60	69.94	3.57	0.08	
403.00	65.59	2.49	0.08	
			2.00	8.34
			2.34	7.84
			2.73	7.56
			3.19	7.79
			3.72	7.62
			4.34	7.59
			5.07	7.61
			5.91	7.74
			6.90	7.59
			8.05	7.58
			9.39	7.69
			10.96	7.75
			12.94	7.74
			15.10	7.71
			17.83	7.72
			20.81	7.74
			24.57	7.77
			28.67	7.76
			33.85	7.90
			39.50	8.02
			46.64	8.21
			54.43	8.54
			64.27	9.03
			75.00	9.68
			88.56	11.21
			98.00	14.05
			108.00	16.77
			146.00	4.66
			189.00	2.25
			196.20	2.29

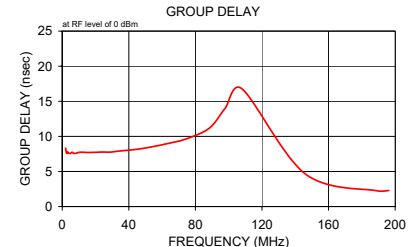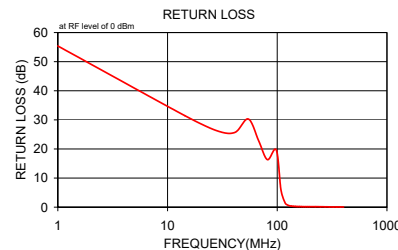

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Low Pass Filter

BLP-100-75+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
1.0	1.00	55.39	2.0	8.340
14.4	0.09	31.44	2.3	7.840
27.8	0.14	26.34	2.7	7.560
41.1	0.18	25.69	3.2	7.790
54.5	0.22	30.30	3.7	7.620
67.9	0.29	22.73	4.3	7.590
81.3	0.45	16.35	5.1	7.610
98.0	0.62	19.63	5.9	7.740
108.0	2.25	6.07	6.9	7.590
118.0	7.71	1.47	8.1	7.580
123.6	11.47	0.78	9.4	7.690
129.2	15.15	0.50	11.0	7.750
134.8	18.64	0.37	12.9	7.740
140.4	21.90	0.30	15.1	7.710
146.0	24.97	0.26	17.8	7.720
151.6	27.86	0.23	20.8	7.740
159.1	31.52	0.21	24.6	7.770
166.6	34.94	0.19	28.7	7.760
174.0	38.15	0.18	33.9	7.900
181.5	41.21	0.18	39.5	8.020
189.0	44.21	0.17	46.6	8.210
196.5	47.04	0.17	54.4	8.540
221.9	56.41	0.16	64.3	9.030
247.4	67.24	0.14	75.0	9.680
272.8	77.49	0.11	88.6	11.210
298.3	75.88	0.10	98.0	14.050
323.7	73.99	0.08	108.0	16.770
349.1	71.06	0.08	146.0	4.660
374.6	69.94	0.08	189.0	2.250
403.0	65.59	0.08	196.2	2.290

REV. X1
BLP-100-75+
060724
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Coaxial Low Pass Filter

BLP-100-75+

Typical Performance Curves

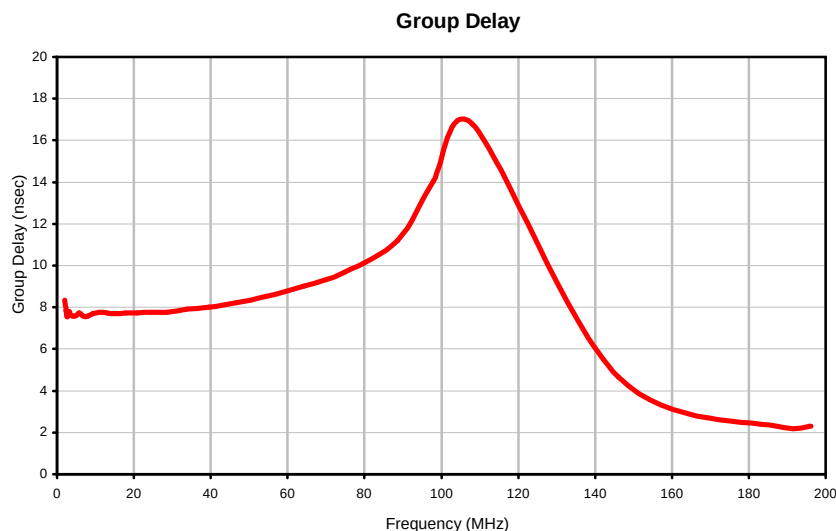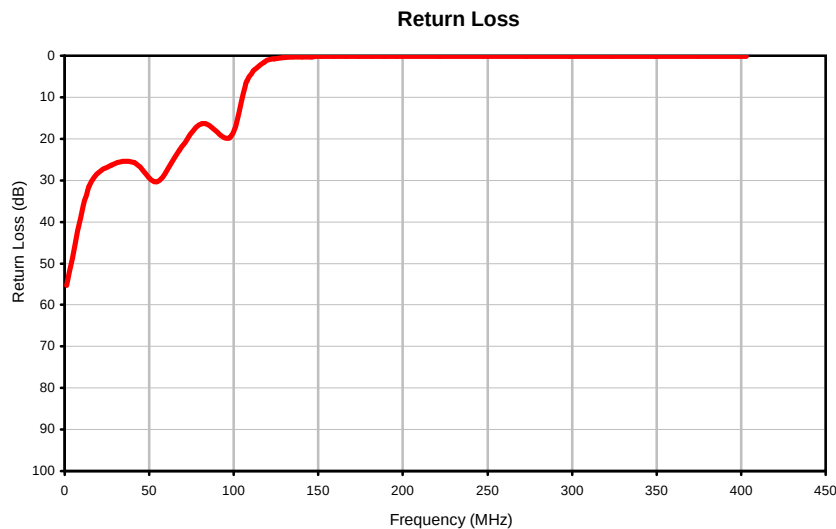

REV. X1
BLP-100-75+
060724
Page 1 of 1




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Outline Dimensions

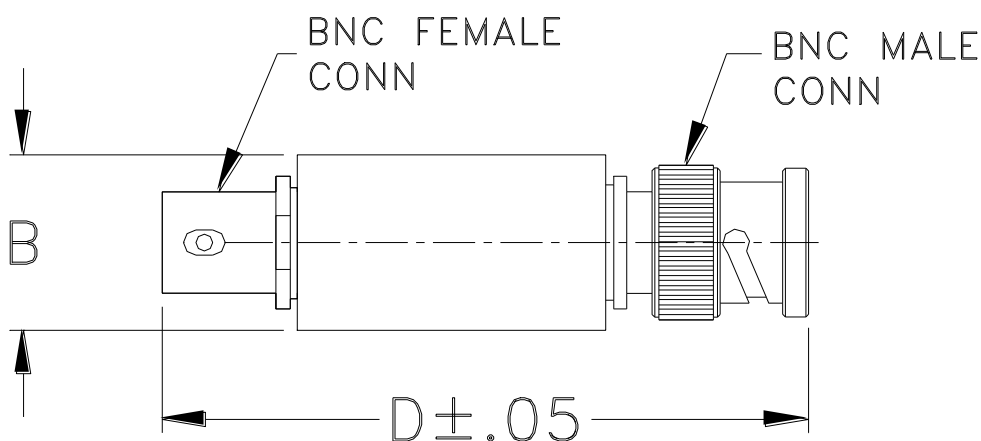

CASE #.	A	B	C	D	E	WT GRAMS
FF55	--	.57 (14.47)	--	2.59 (65.79)	--	40.0

Dimensions are in inches (mm). Tolerances: 2Pl. +.03/-.04; 3Pl. ± .015

Note:

1. Case material: Stainless steel.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I