

High IP3 Frequency Mixer

Level 17 (LO Power +17 dBm) 1850 to 1910 MHz

HJK-21H+
HJK-21H

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C


LO & RF Power +20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	2
RF	1
IF	3
GROUND	4,5,6


Outline Drawing

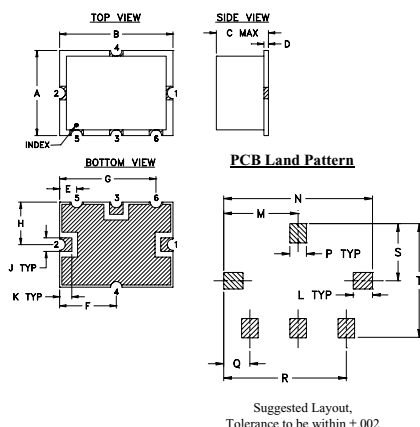

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

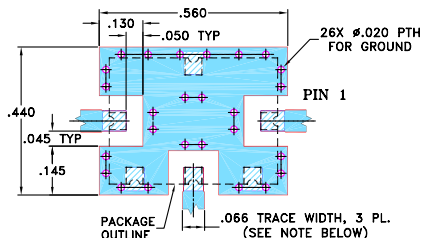

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. 2. GROUND PAD SHALL BE FREE OF SOLDER MASK IF REQUIRED FOR SOLDERING. 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. 4. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2. 5. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- high IP3, 36 dBm typ.
- compression, 3 dB higher than LO power

Applications

- base stations
- communication systems
- PCS



CASE STYLE: TTT167

Price: Contact Sales Department

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications


FREQUENCY (MHz)			CONVERSION LOSS (dB)			RF in at 1dB Compr (dBm)	IP3 (dBm)	LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)	
RF	LO	IF	Typ.	σ	Max.	Typ.	Typ.	Typ.	Min.	Typ.	Min.
1850-1910	2090-2150	180-300	7.6	0.2	8.9	+20	36	28	20	28	18

NON-CATALOG

Typical Performance Data

Frequency		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	IP3 (dBm)
RF MHz	LO MHz	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
1850.00	2090.00	7.52	27.66	25.10	1.93	1.55	36.86
1856.00	2096.00	7.57	28.09	25.51	1.93	1.59	36.01
1862.00	2102.00	7.55	28.31	25.75	1.93	1.53	34.48
1868.00	2108.00	7.54	27.91	25.18	1.94	1.52	37.79
1874.00	2114.00	7.52	27.94	25.41	1.95	1.57	33.82
1880.00	2120.00	7.50	29.37	26.90	1.95	1.53	34.28
1886.00	2126.00	7.52	28.03	25.59	1.96	1.63	36.44
1892.00	2132.00	7.43	28.40	25.88	1.96	1.59	34.76
1898.00	2138.00	7.46	28.17	25.61	1.95	1.68	34.57
1904.00	2144.00	7.48	29.94	27.55	1.94	1.62	37.36
1910.00	2150.00	7.54	29.98	27.61	1.94	1.62	35.30

Electrical Schematic

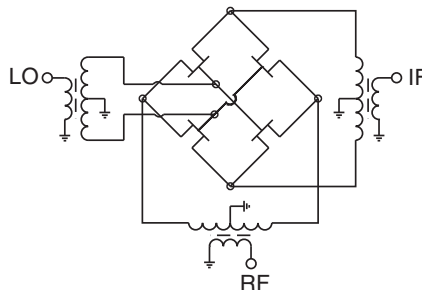

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS








Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

Rev. F
M112207
ED-8939/1
HJK-21H
DJ/TD/AM
100519
Page 1 of 2

Performance Charts

HJK-21H+ HJK-21H

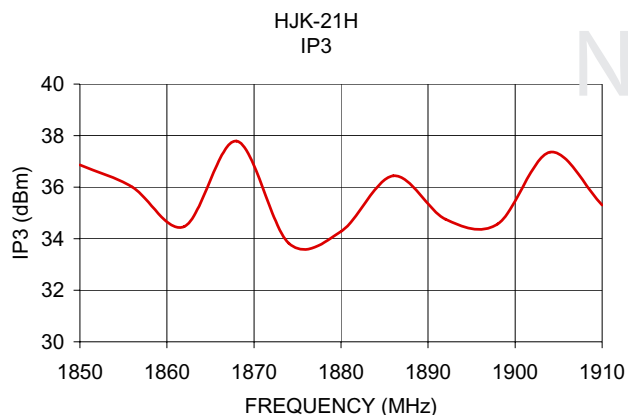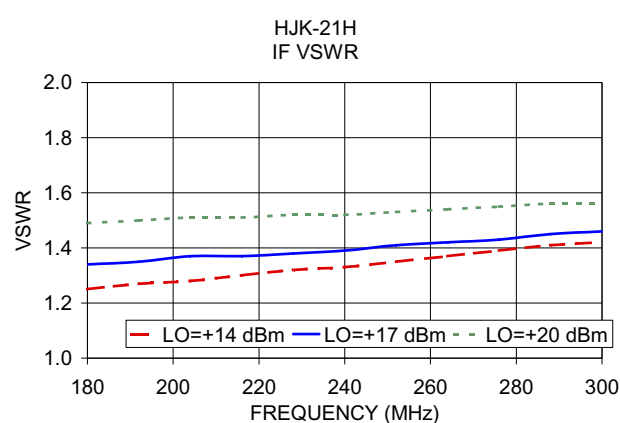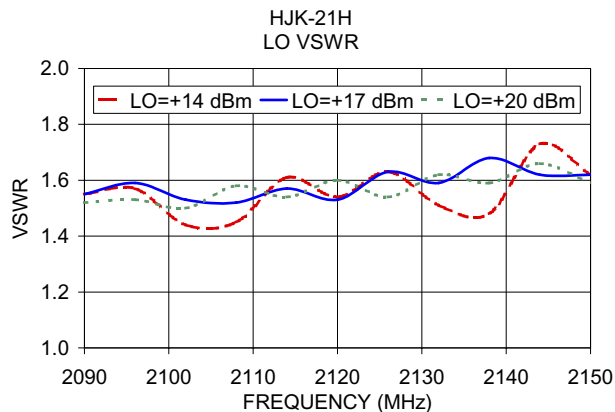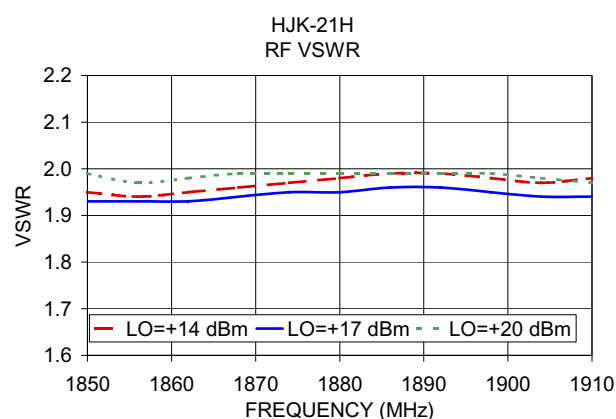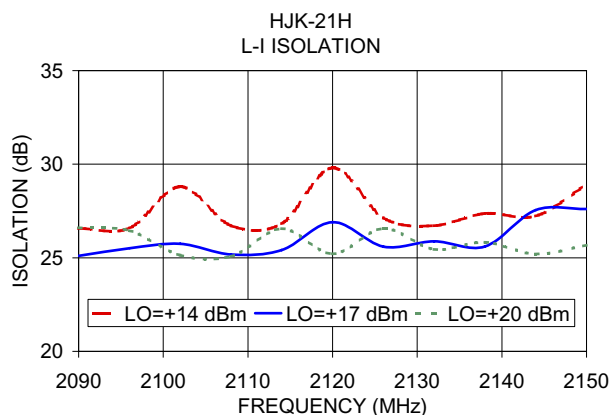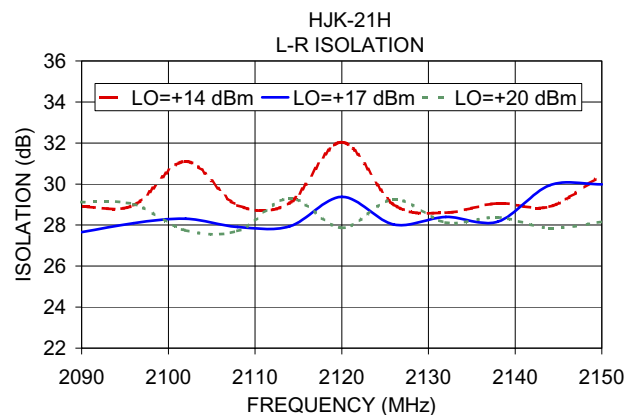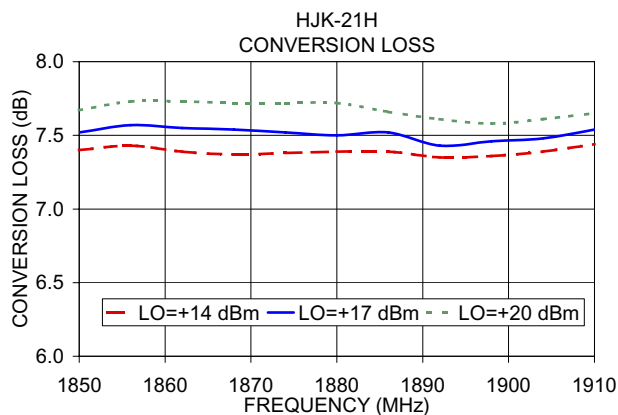

NON-CATALOG

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Frequency Mixer

HJK-21H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=240MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
760.1	1000.1	12.46	10.53	9.02
830.1	1070.1	11.24	9.67	8.49
900.1	1140.1	10.49	9.18	8.30
970.1	1210.1	9.78	8.72	8.15
1040.1	1280.1	8.99	8.03	7.54
1110.1	1350.1	8.59	7.62	7.18
1180.1	1420.1	8.40	7.47	7.12
1250.1	1490.1	7.96	7.28	7.06
1320.1	1560.1	7.76	7.22	7.11
1390.1	1630.1	7.82	7.38	7.36
1460.1	1700.1	7.67	7.44	7.51
1530.1	1770.1	7.50	7.36	7.43
1600.1	1840.1	7.44	7.36	7.44
1670.1	1910.1	7.51	7.45	7.55
1740.1	1980.1	7.59	7.59	7.70
1810.1	2050.1	7.58	7.61	7.73
1880.1	2120.1	7.61	7.65	7.80
1950.1	2190.1	7.80	7.82	7.95
2020.1	2260.1	7.94	7.94	8.05
2090.1	2330.1	7.91	7.85	7.92
2160.1	2400.1	8.03	7.87	7.89
2230.1	2470.1	8.28	8.04	8.01
2300.1	2540.1	8.45	8.04	7.94
2370.1	2610.1	8.55	7.98	7.78
2440.1	2680.1	8.79	8.14	7.86
2510.1	2750.1	9.09	8.32	8.01
2580.1	2820.1	9.36	8.44	8.03
2650.1	2890.1	9.50	8.53	8.08
2720.1	2960.1	9.70	8.72	8.31
2790.1	3030.1	9.86	8.94	8.48
2870.1	3110.1	10.07	9.05	8.61
2940.1	3180.1	10.07	9.05	8.60
3020.1	3260.1	10.13	9.14	8.72
3090.1	3330.1	10.32	9.34	8.93
3170.1	3410.1	10.55	9.51	9.03
3240.1	3480.1	10.60	9.46	8.94
3320.1	3560.1	10.52	9.47	8.91
3390.1	3630.1	10.82	9.68	9.07
3470.1	3710.1	11.30	10.00	9.23
3540.1	3780.1	11.62	10.23	9.29

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
760.1	1000.1	19.11	21.80	22.07
830.1	1070.1	19.43	21.70	22.34
900.1	1140.1	19.85	21.65	22.79
970.1	1210.1	21.72	23.02	23.87
1040.1	1280.1	19.49	22.00	23.45
1110.1	1350.1	17.80	20.55	22.97
1180.1	1420.1	18.24	20.38	22.77
1250.1	1490.1	20.27	21.44	24.08
1320.1	1560.1	20.87	22.01	24.87
1390.1	1630.1	21.86	23.12	25.93
1460.1	1700.1	22.48	24.63	27.31
1530.1	1770.1	23.30	26.14	28.34
1600.1	1840.1	24.28	27.49	29.03
1670.1	1910.1	25.29	29.11	30.28
1740.1	1980.1	26.35	30.67	32.15
1810.1	2050.1	27.83	33.09	34.34
1880.1	2120.1	27.78	33.57	35.47
1950.1	2190.1	27.93	33.76	37.47
2020.1	2260.1	27.68	33.03	37.21
2090.1	2330.1	26.45	31.69	35.43
2160.1	2400.1	25.16	30.40	34.56
2230.1	2470.1	24.39	29.40	33.42
2300.1	2540.1	22.77	26.70	31.98
2370.1	2610.1	21.99	24.91	30.19
2440.1	2680.1	21.73	24.50	29.36
2510.1	2750.1	21.47	24.22	28.22
2580.1	2820.1	21.01	23.33	27.16
2650.1	2890.1	21.17	23.47	27.38
2720.1	2960.1	21.18	23.61	27.89
2790.1	3030.1	21.08	23.42	27.53
2870.1	3110.1	21.09	23.33	27.30
2940.1	3180.1	21.38	23.68	27.58
3020.1	3260.1	21.85	24.29	27.98
3090.1	3330.1	22.26	24.54	28.36
3170.1	3410.1	22.61	24.50	27.99
3240.1	3480.1	22.96	24.32	27.60
3320.1	3560.1	23.60	24.59	27.87
3390.1	3630.1	24.52	25.00	27.84
3470.1	3710.1	24.65	24.64	26.99
3540.1	3780.1	23.83	24.13	25.89

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+20dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
760.1	1000.1	3.11	2.85	2.52
830.1	1070.1	3.98	3.36	2.76
900.1	1140.1	4.46	3.64	2.83
970.1	1210.1	5.01	3.96	2.91
1040.1	1280.1	6.19	4.73	3.37
1110.1	1350.1	7.98	5.78	3.94
1180.1	1420.1	7.01	5.59	3.76
1250.1	1490.1	5.11	3.83	2.55
1320.1	1560.1	4.23	3.00	1.89
1390.1	1630.1	3.62	2.47	1.53
1460.1	1700.1	3.09	2.02	1.14
1530.1	1770.1	2.59	1.62	0.89
1600.1	1840.1	2.26	1.38	0.77
1670.1	1910.1	1.99	1.20	0.65
1740.1	1980.1	1.66	0.92	0.48
1810.1	2050.1	1.48	0.76	0.36
1880.1	2120.1	1.42	0.73	0.31
1950.1	2190.1	1.38	0.72	0.30
2020.1	2260.1	1.56	0.80	0.34
2090.1	2330.1	1.93	1.02	0.47
2160.1	2400.1	2.12	1.20	0.61
2230.1	2470.1	2.13	1.30	0.65
2300.1	2540.1	2.44	1.54	0.89
2370.1	2610.1	2.66	1.78	1.09
2440.1	2680.1	2.35	1.57	1.02
2510.1	2750.1	2.29	1.56	1.04
2580.1	2820.1	2.40	1.65	1.13
2650.1	2890.1	2.28	1.62	1.05
2720.1	2960.1	1.86	1.33	0.93
2790.1	3030.1	1.94	1.31	0.95
2870.1	3110.1	1.86	1.34	0.91
2940.1	3180.1	1.81	1.32	0.88
3020.1	3260.1	1.68	1.22	0.83
3090.1	3330.1	1.46	1.05	0.76
3170.1	3410.1	1.47	1.08	0.79
3240.1	3480.1	1.62	1.18	0.82
3320.1	3560.1	1.52	1.11	0.80
3390.1	3630.1	1.15	0.90	0.66
3470.1	3710.1	0.92	0.83	0.67
3540.1	3780.1	1.01	0.90	0.68

Frequency Mixer

HJK-21H

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1880MHz (dB)
		@LO (dBm)
		+17
570.0	1310.0	10.31
541.3	1338.7	9.98
512.6	1367.4	9.62
483.8	1396.2	9.24
455.1	1424.9	9.04
426.4	1453.6	8.68
397.7	1482.3	8.41
369.0	1511.0	8.26
340.3	1539.7	8.09
311.5	1568.5	7.87
282.8	1597.2	7.75
254.1	1625.9	7.67
225.4	1654.6	7.53
196.7	1683.3	7.42
167.9	1712.1	7.36
139.2	1740.8	7.33
110.5	1769.5	7.26
81.8	1798.2	7.26
53.1	1826.9	7.26
24.4	1855.6	7.25
10.0	1890.0	7.64
62.3	1942.3	7.32
114.6	1994.6	7.42
166.9	2046.9	7.49
219.2	2099.2	7.60
271.5	2151.5	7.72
323.8	2203.8	7.87
376.2	2256.2	8.04
428.5	2308.5	8.17
480.8	2360.8	8.37
533.1	2413.1	8.49
585.4	2465.4	8.63
637.7	2517.7	8.75
690.0	2570.0	8.86
742.3	2622.3	9.00
794.6	2674.6	9.11
846.9	2726.9	9.38
899.2	2779.2	9.57
951.5	2831.5	9.91
1030.0	2910.0	10.37

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1839.9MHz (dB)
		@LO (dBm)
		+17
10.1	1850.0	7.72
30.5	1870.4	7.37
51.0	1890.9	7.42
71.4	1911.3	7.42
91.8	1931.7	7.46
112.2	1952.1	7.49
132.7	1972.6	7.50
153.1	1993.0	7.56
173.5	2013.4	7.56
193.9	2033.8	7.65
214.4	2054.3	7.67
234.8	2074.7	7.73
255.2	2095.1	7.79
275.6	2115.5	7.80
296.1	2136.0	7.88
316.5	2156.4	7.87
336.9	2176.8	7.97
357.3	2197.2	8.00
377.8	2217.7	8.06
398.2	2238.1	8.14
418.6	2258.5	8.17
439.0	2278.9	8.30
459.5	2299.4	8.35
479.9	2319.8	8.49
520.7	2360.6	8.60
541.2	2381.1	8.64
582.0	2421.9	8.73
602.4	2442.3	8.75
643.3	2483.2	8.82
663.7	2503.6	8.90
704.6	2544.5	8.94
725.0	2564.9	8.98
765.8	2605.7	9.14
786.3	2626.2	9.18
827.1	2667.0	9.28
847.5	2687.4	9.43
888.4	2728.3	9.58
908.8	2748.7	9.64
949.7	2789.6	9.92
970.1	2810.0	10.05

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1920.1MHz (dB)
		@LO (dBm)
		+17
570.1	1350.0	10.25
555.7	1364.4	10.01
541.4	1378.7	9.79
527.0	1393.1	9.66
512.7	1407.4	9.51
498.3	1421.8	9.43
483.9	1436.2	9.32
469.6	1450.5	9.11
455.2	1464.9	8.96
440.9	1479.2	8.78
426.5	1493.6	8.64
412.2	1507.9	8.60
397.8	1522.3	8.55
383.4	1536.7	8.42
369.1	1551.0	8.30
354.7	1565.4	8.20
340.4	1579.7	8.10
326.0	1594.1	8.02
311.6	1608.5	7.99
297.3	1622.8	7.93
282.9	1637.2	7.83
268.6	1651.5	7.75
254.2	1665.9	7.65
239.8	1680.3	7.60
225.5	1694.6	7.58
211.1	1709.0	7.54
196.8	1723.3	7.52
182.4	1737.7	7.46
168.0	1752.1	7.40
153.7	1766.4	7.41
139.3	1780.8	7.39
125.0	1795.1	7.37
110.6	1809.5	7.39
96.3	1823.8	7.37
81.9	1838.2	7.36
67.5	1852.6	7.38
53.2	1866.9	7.36
38.8	1881.3	7.36
24.5	1895.6	7.42
10.1	1910.0	7.74

REV. X3

HJK-21H

101012

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
1000.1	65.34	65.61	62.26	44.68	45.02	45.15
1070.1	60.07	66.81	68.67	43.69	43.87	43.91
1140.1	49.62	52.07	55.39	43.78	43.64	43.46
1210.1	43.39	44.08	45.21	45.05	44.33	43.92
1280.1	39.92	40.62	41.61	47.73	47.82	47.35
1350.1	36.96	37.97	39.10	46.07	50.27	53.60
1420.1	35.28	36.37	37.64	41.38	45.10	49.02
1490.1	34.86	36.20	37.58	38.50	41.32	43.82
1560.1	35.95	38.55	41.15	35.56	37.28	38.59
1630.1	35.86	38.39	40.16	32.78	33.96	34.95
1700.1	34.30	35.65	36.43	30.70	31.59	32.36
1770.1	32.99	33.62	33.98	28.75	29.45	29.96
1840.1	31.53	31.83	31.85	26.85	27.31	27.64
1910.1	31.15	31.20	31.14	25.26	25.52	25.69
1980.1	30.80	30.72	30.75	24.43	24.44	24.65
2050.1	30.86	30.92	30.96	24.71	24.64	24.63
2120.1	30.93	30.95	31.07	25.91	25.91	25.94
2190.1	30.52	30.50	30.50	28.03	28.04	27.99
2260.1	30.16	29.95	29.95	32.06	31.83	31.68
2330.1	31.49	31.28	31.39	40.68	39.91	39.45
2400.1	33.99	33.85	33.95	57.84	63.93	79.16
2470.1	35.00	34.83	34.49	42.64	43.24	43.61
2540.1	35.43	35.04	34.61	38.71	39.08	39.27
2610.1	35.52	34.88	34.17	36.17	36.56	36.66
2680.1	35.92	35.22	34.53	34.22	34.61	34.67
2750.1	36.12	35.00	34.40	32.69	32.87	33.16
2820.1	36.40	35.14	34.39	31.21	31.39	31.73
2890.1	36.62	35.03	34.22	29.58	29.81	30.17
2960.1	37.73	35.97	35.23	28.09	28.34	28.79
3030.1	39.23	37.06	36.05	26.66	26.97	27.50
3110.1	42.53	39.81	38.17	25.69	26.21	26.75
3180.1	45.13	43.10	40.81	25.75	26.39	26.97
3260.1	42.86	43.34	42.17	26.87	27.55	28.02
3330.1	40.66	41.39	41.13	28.06	28.61	28.87
3410.1	38.63	39.34	39.53	29.32	29.58	29.58
3480.1	36.84	37.56	37.61	30.19	30.10	29.87
3560.1	35.52	35.97	36.03	30.53	30.32	29.92
3630.1	34.56	34.92	34.85	30.83	30.27	29.92
3710.1	33.56	34.01	34.03	30.95	30.25	29.54
3780.1	33.17	33.73	33.84	31.06	30.24	29.40

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
760.1	1000.1	24.38	22.72	22.23
830.1	1070.1	23.90	21.82	21.17
900.1	1140.1	25.40	22.43	21.56
970.1	1210.1	29.93	25.35	23.48
1040.1	1280.1	42.43	28.99	25.50
1110.1	1350.1	27.65	26.71	27.37
1180.1	1420.1	24.66	26.42	29.81
1250.1	1490.1	24.85	27.88	31.54
1320.1	1560.1	26.46	30.57	35.53
1390.1	1630.1	28.06	33.24	37.66
1460.1	1700.1	29.70	34.29	36.28
1530.1	1770.1	31.15	34.94	36.83
1600.1	1840.1	31.92	35.18	37.14
1670.1	1910.1	32.09	34.86	36.78
1740.1	1980.1	32.30	34.64	36.05
1810.1	2050.1	32.36	33.86	34.74
1880.1	2120.1	31.79	32.52	32.95
1950.1	2190.1	31.19	31.46	31.51
2020.1	2260.1	30.72	30.90	30.87
2090.1	2330.1	30.29	30.70	30.88
2160.1	2400.1	30.27	30.85	31.31
2230.1	2470.1	30.61	31.41	32.19
2300.1	2540.1	30.34	31.53	32.67
2370.1	2610.1	29.99	31.34	32.77
2440.1	2680.1	29.94	31.37	32.97
2510.1	2750.1	30.01	31.62	33.28
2580.1	2820.1	30.08	31.50	33.22
2650.1	2890.1	30.46	31.86	33.57
2720.1	2960.1	31.33	32.66	34.21
2790.1	3030.1	32.73	33.84	35.21
2870.1	3110.1	35.99	36.89	38.20
2940.1	3180.1	41.28	42.13	44.17
3020.1	3260.1	42.61	42.58	43.21
3090.1	3330.1	36.22	36.04	36.28
3170.1	3410.1	32.09	32.03	32.38
3240.1	3480.1	30.28	30.36	30.78
3320.1	3560.1	29.32	29.76	30.26
3390.1	3630.1	29.10	29.48	29.98
3470.1	3710.1	29.04	29.50	30.09
3540.1	3780.1	29.18	29.65	30.29

Frequency Mixer

HJK-21H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)				IF (OUT) (MHz)	IF VSWR @LO=1910MHz (:1)		
		@LO (dBm)				@LO (dBm)					@LO (dBm)		
		+14	+17	+20		+14	+17	+20	+14		+17	+20	
760.1	1000.1	4.61	3.76	3.24	1000.1	45.72	44.55	40.41	10.0	1.05	1.16	1.28	
830.1	1070.1	3.27	2.78	2.51	1070.1	39.49	37.77	36.20	50.4	1.11	1.21	1.33	
900.1	1140.1	2.45	2.14	2.03	1140.1	32.18	30.49	27.59	90.9	1.13	1.21	1.32	
970.1	1210.1	1.90	1.70	1.77	1210.1	26.74	25.19	22.87	131.3	1.24	1.29	1.39	
1040.1	1280.1	1.55	1.45	1.61	1280.1	23.81	23.49	22.87	171.8	1.28	1.33	1.42	
1110.1	1350.1	1.29	1.27	1.49	1350.1	21.20	21.20	20.22	212.2	1.42	1.44	1.50	
1180.1	1420.1	1.08	1.24	1.51	1420.1	18.70	18.11	16.89	252.7	1.49	1.51	1.57	
1250.1	1490.1	1.11	1.37	1.65	1490.1	16.41	15.96	15.13	293.1	1.60	1.60	1.63	
1320.1	1560.1	1.26	1.51	1.80	1560.1	13.92	13.49	12.99	333.6	1.73	1.73	1.76	
1390.1	1630.1	1.38	1.64	1.96	1630.1	11.53	11.09	10.56	374.0	1.79	1.77	1.78	
1460.1	1700.1	1.51	1.74	2.05	1700.1	9.04	8.64	8.16	414.5	1.97	1.93	1.94	
1530.1	1770.1	1.66	1.86	2.13	1770.1	6.83	6.53	6.24	454.9	2.01	1.95	1.95	
1600.1	1840.1	1.76	1.94	2.19	1840.1	4.98	4.73	4.53	495.4	2.18	2.10	2.08	
1670.1	1910.1	1.84	1.99	2.20	1910.1	3.46	3.29	3.14	535.8	2.23	2.15	2.12	
1740.1	1980.1	1.95	2.07	2.25	1980.1	2.37	2.25	2.16	576.3	2.35	2.24	2.18	
1810.1	2050.1	2.01	2.13	2.29	2050.1	1.68	1.62	1.58	616.7	2.42	2.32	2.27	
1880.1	2120.1	2.04	2.12	2.25	2120.1	1.49	1.50	1.52	657.2	2.45	2.32	2.25	
1950.1	2190.1	2.08	2.10	2.20	2190.1	1.82	1.88	1.95	697.6	2.54	2.41	2.34	
2020.1	2260.1	2.10	2.07	2.13	2260.1	2.38	2.47	2.56	738.1	2.50	2.36	2.27	
2090.1	2330.1	2.13	2.02	2.03	2330.1	3.08	3.18	3.25	798.8	2.51	2.37	2.28	
2160.1	2400.1	2.25	2.06	2.02	2400.1	3.87	3.98	4.06	839.2	2.53	2.38	2.29	
2230.1	2470.1	2.34	2.10	2.00	2470.1	4.66	4.79	4.89	899.9	2.48	2.35	2.26	
2300.1	2540.1	2.53	2.18	1.99	2540.1	5.31	5.41	5.41	940.3	2.42	2.29	2.20	
2370.1	2610.1	2.80	2.36	2.07	2610.1	5.87	5.89	5.74	1001.0	2.31	2.20	2.13	
2440.1	2680.1	2.93	2.46	2.14	2680.1	6.42	6.49	6.42	1041.5	2.29	2.19	2.12	
2510.1	2750.1	3.09	2.56	2.23	2750.1	6.81	6.89	6.81	1102.1	2.13	2.05	2.00	
2580.1	2820.1	3.43	2.81	2.44	2820.1	6.91	6.89	6.63	1142.6	2.08	2.01	1.96	
2650.1	2890.1	3.64	3.01	2.62	2890.1	6.94	6.89	6.63	1203.3	1.94	1.89	1.85	
2720.1	2960.1	3.63	3.03	2.67	2960.1	7.05	7.05	6.97	1243.7	1.89	1.85	1.82	
2790.1	3030.1	3.82	3.20	2.81	3030.1	6.83	6.81	6.71	1304.4	1.77	1.73	1.71	
2870.1	3110.1	4.06	3.40	2.98	3110.1	6.37	6.28	6.09	1344.8	1.73	1.71	1.70	
2940.1	3180.1	4.06	3.42	3.00	3180.1	6.01	5.89	5.65	1405.5	1.64	1.63	1.63	
3020.1	3260.1	4.06	3.43	3.01	3260.1	5.56	5.46	5.30	1446.0	1.58	1.59	1.60	
3090.1	3330.1	4.23	3.58	3.14	3330.1	4.99	4.89	4.79	1506.6	1.52	1.53	1.56	
3170.1	3410.1	4.31	3.64	3.18	3410.1	4.31	4.18	4.05	1547.1	1.48	1.51	1.55	
3240.1	3480.1	4.34	3.66	3.18	3480.1	3.71	3.56	3.39	1607.8	1.45	1.48	1.53	
3320.1	3560.1	4.43	3.79	3.28	3560.1	3.11	2.99	2.88	1648.2	1.41	1.46	1.52	
3390.1	3630.1	4.61	3.92	3.40	3630.1	2.64	2.55	2.48	1708.9	1.39	1.44	1.51	
3470.1	3710.1	4.68	3.99	3.42	3710.1	2.19	2.12	2.06	1749.3	1.36	1.43	1.51	
3540.1	3780.1	4.86	4.18	3.56	3780.1	1.87	1.81	1.75	1810.0	1.34	1.41	1.49	

REV. X3
HJK-21H
101012
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	11	25	30	37	44	59	54	68	62
1	-	25	+0	28	21	50	37	46	35	54	50	67
2	49	42	48	45	51	44	53	50	55	57	70	68
3	82	64	54	55	46	55	52	62	66	79	60	81
4	>90	85	77	74	76	70	80	74	76	74	70	>87
5	>90	>87	>87	82	>87	71	80	76	78	81	>87	>87
6	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>90	>87	>87	>87	>87	>87	>87	86	>87	>87	>87	>87
8	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 1880 MHz; 5.00 dBm.
LO IN: 2120 MHz; +17.00 dBm
IF OUT: 240 MHz; -2.8 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	21	37	39	46	53	60	67	72	70
1	-	25	+0	31	23	51	41	49	41	63	58	73
2	29	33	40	37	49	40	47	46	61	55	71	67
3	53	52	35	41	28	43	37	55	53	68	51	72
4	71	64	63	49	51	48	58	54	58	56	59	72
5	>90	67	57	62	51	50	44	54	50	63	69	66
6	>90	75	69	71	67	62	58	60	63	65	71	69
7	>90	77	74	83	82	76	65	57	57	63	63	69
8	>90	94	78	79	78	81	77	77	72	67	74	76
9	>90	>97	91	81	87	82	>97	78	70	64	68	70
10	>90	>97	97	>97	87	87	89	89	82	87	80	75
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:


RF IN: 1880 MHz; 15.00 dBm.
LO IN: 2120 MHz; +17.00 dBm
IF OUT: 240 MHz; 6.97 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X3
HJK-21H
101012
Page 5 of 5

Typical Performance Curves


Conversion Loss @ IF=240MHz

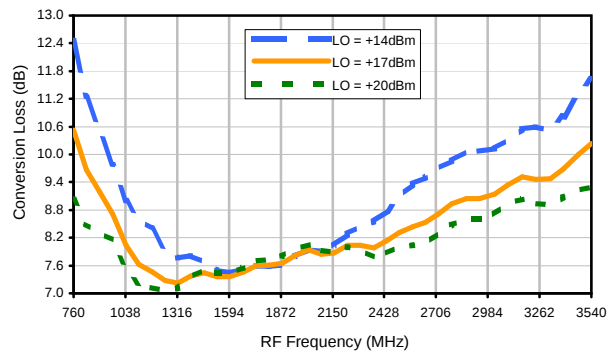


Conversion Loss vs. LO @ RF=1880MHz

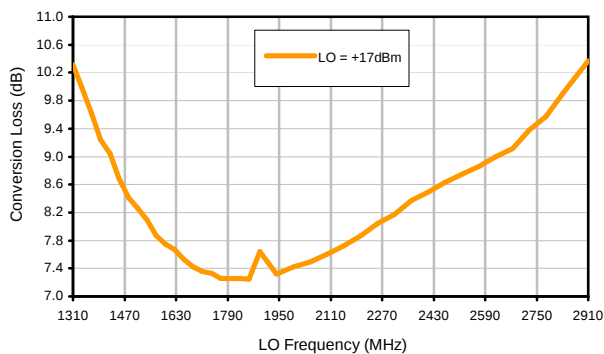


Conversion Loss vs. IF @ RF=1880MHz

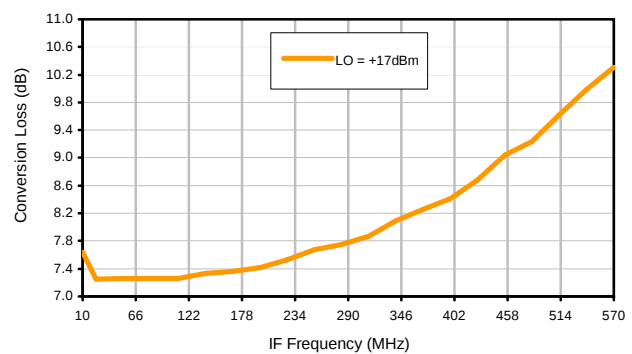


Conversion Loss vs. IF @ RF=1839.9MHz

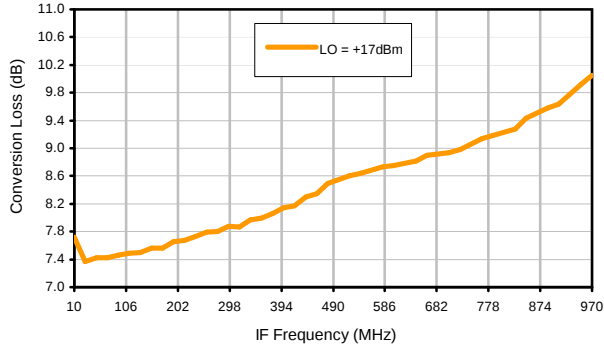


Conversion Loss vs. IF @ RF=1920.1MHz

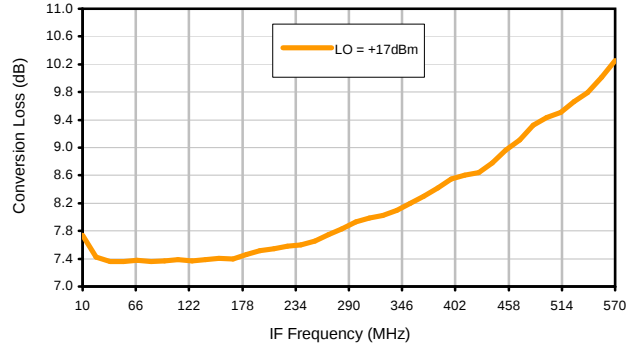

IP3 Input

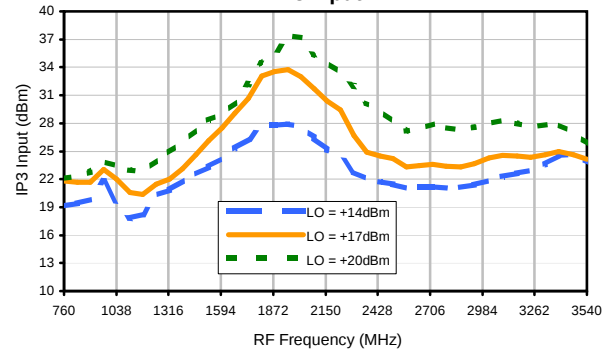


Compression @ RF IN=+20dBm

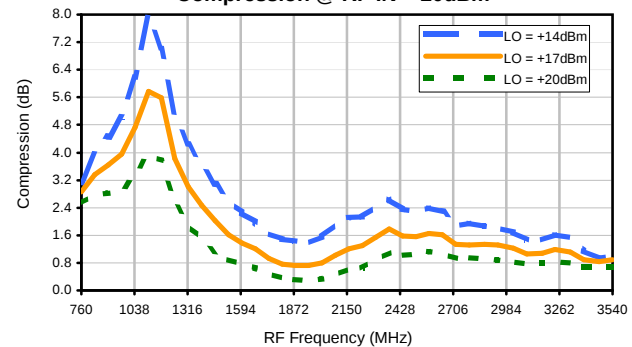


Typical Performance Curves


LO-RF Isolation

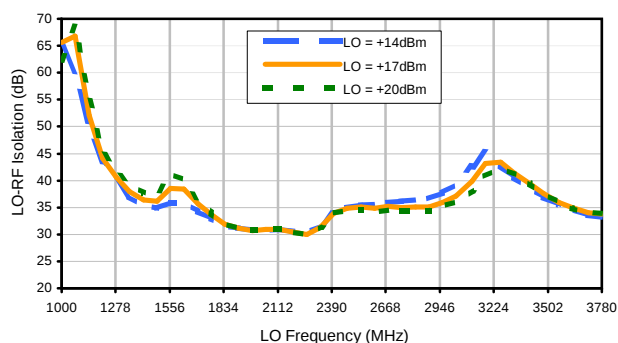


LO-IF Isolation

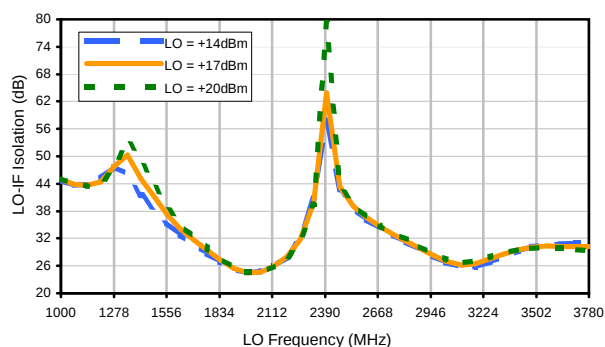


RF-IF Isolation

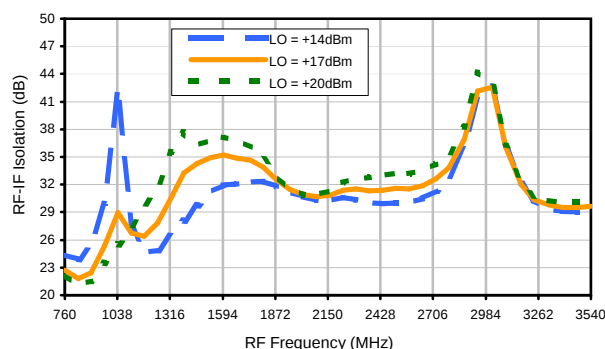


RF VSWR

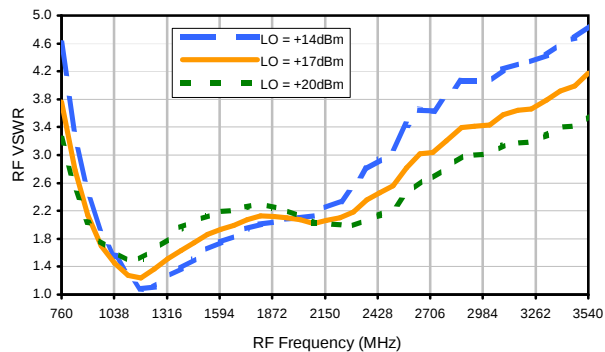

LO VSWR

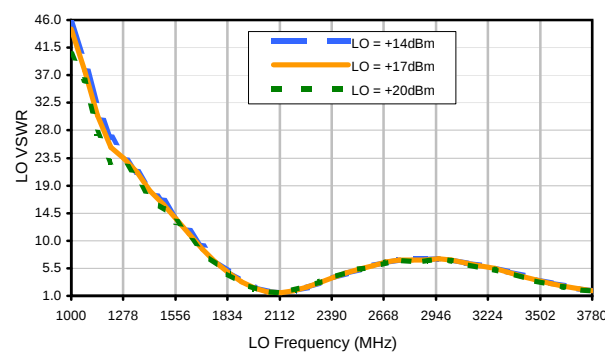

IF VSWR

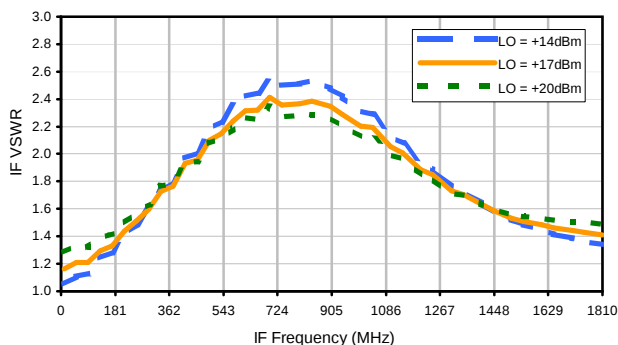

REV. X3

HJK-21H

101012

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	11	25	30	37	44	59	54	68	62
1	-	25	+0	28	21	50	37	46	35	54	50	67
2	49	42	48	45	51	44	53	50	55	57	70	68
3	82	64	54	55	46	55	52	62	66	79	60	81
4	>90	85	77	74	76	70	80	74	76	74	70	>87
5	>90	>87	>87	82	>87	71	80	76	78	81	>87	>87
6	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
7	>90	>87	>87	>87	>87	>87	>87	86	>87	>87	>87	>87
8	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
9	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
10	>90	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87	>87
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 1880 MHz; 5.00 dBm.
LO IN: 2120 MHz; +17.00 dBm
IF OUT: 240 MHz; -2.8 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	21	37	39	46	53	60	67	72	70
1	-	25	+0	31	23	51	41	49	41	63	58	73
2	29	33	40	37	49	40	47	46	61	55	71	67
3	53	52	35	41	28	43	37	55	53	68	51	72
4	71	64	63	49	51	48	58	54	58	56	59	72
5	>90	67	57	62	51	50	44	54	50	63	69	66
6	>90	75	69	71	67	62	58	60	63	65	71	69
7	>90	77	74	83	82	76	65	57	57	63	63	69
8	>90	94	78	79	78	81	77	77	72	67	74	76
9	>90	>97	91	81	87	82	>97	78	70	64	68	70
10	>90	>97	97	>97	87	87	89	89	82	87	80	75
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 1880 MHz; 15.00 dBm.
LO IN: 2120 MHz; +17.00 dBm
IF OUT: 240 MHz; 6.97 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3

HJK-21H

101012

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350188, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Outline Dimensions

TTT166
TTT167



PCB Land Pattern

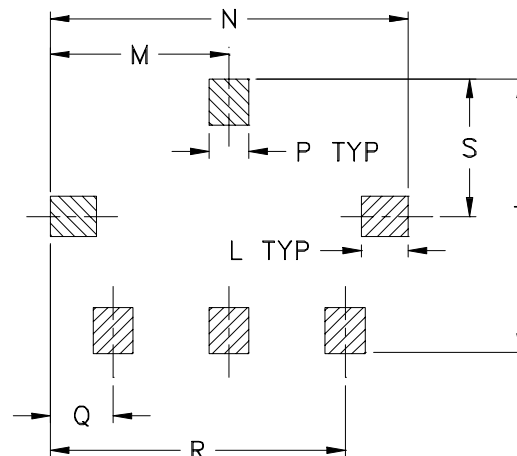

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
TTT166	.38 (9.65)	.50 (12.70)	.15 (3.81)	.020 (0.51)	.075 (1.91)	.250 (6.35)	.425 (10.80)	.187 (4.75)	.050 (1.27)	.050 (1.27)	.070 (1.78)	.270 (6.86)	.540 (13.72)
TTT167			.23 (5.84)										

CASE #	P	Q	R	S	T	WT. GRAM
TTT166	.060 (1.52)	.095 (2.41)	.445 (11.30)	.208 (5.28)	.415 (10.54)	.8
TTT167						.8

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Note:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Tape & Reel Packaging TR-F12



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	12	7	Small quantity standards (see note)	10
				20
				50
				100
				200
		13	Standard	500

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M86762	ADDED CONNECTIONS "lp & lq"	05/23/03	MMG	WL
B	M94598	ADDED CONNECTION "hk"	10/08/04	MMG	HY
C	M102713	UPDATED NOTES & DESCRIPTION	01/14/06	GF	IL
D	M132989	UPDATED NOTE 2	08/24/11	GF	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR
TTT166/167 CASE STYLE, "hk"/"lp"/"lq"
"x"/"ck"/"ec" PIN CONNECTIONS**

**NOTE:**

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

GF

03/18/03

CHECKED

IL

04/15/03

APPROVED

DJ

04/15/03



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, hk/lp/lq/x/ck/ec, TTT166/167,
SYM/HJK/SYAS/SYPD, TB-12

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-079

REV:
D

FILE: 98PL079

SCALE: 5:1

SHEET: 1 OF 1


Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections Refer to Data Sheet of the DUT

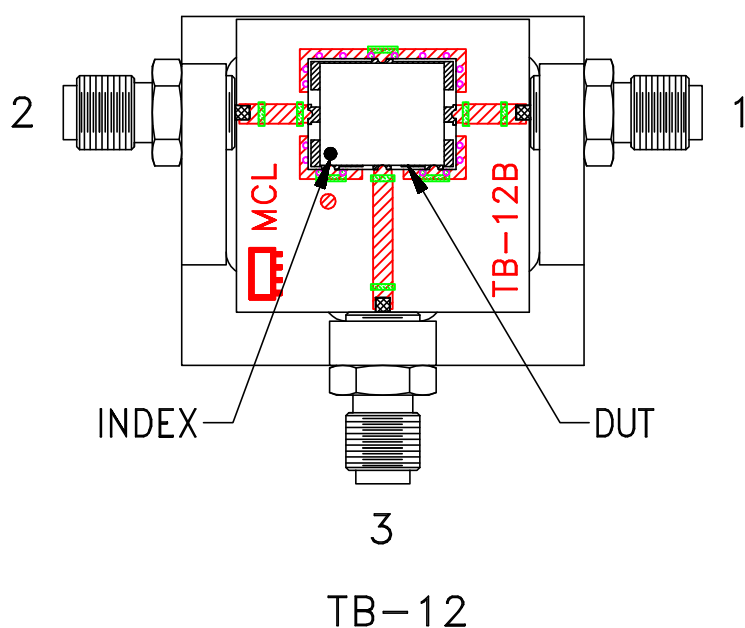

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215