

Surface Mount Frequency Mixer

Level 10 (LO Power +10 dBm) 2 to 500 MHz

JMS-1LH+


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

Outline Drawing

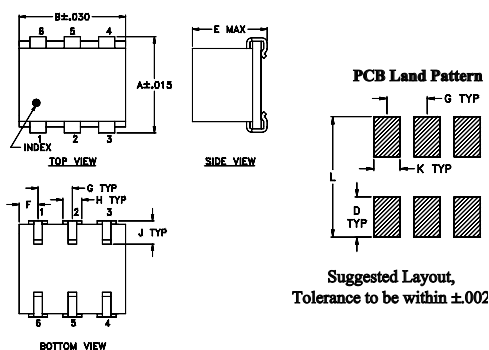


Outline Dimensions (inch)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

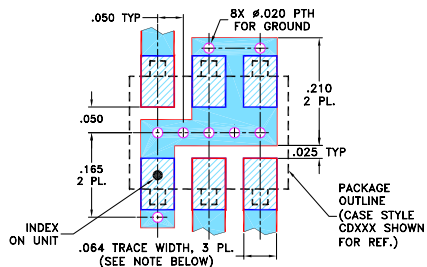

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002", COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.75 dB typ.
- miniature surface mount
- J-leads for strain relief and excellent solderability

Applications

- up & down converters for receivers & transmitters
- VHF/UHF



Generic photo used for illustration purposes only

CASE STYLE: BH292

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band			Total Range Max.	L		M		U		L		M		U		
		$\bar{X}$	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.			
		f_L - f_U																
2-500	DC-500	5.75	.10	7.0	8.0	55	50	45	30	40	25	55	45	45	25	30	20	16

1 dB COMP: +5 dBm typ.

L = low range [f_L to $10 f_L$]
m = mid band [$2 f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]







U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
10.10	40.10	5.60	65.00	53.51	1.13	2.56
49.80	79.80	5.71	61.31	46.92	1.04	2.48
89.50	119.50	5.70	56.90	42.98	1.03	2.35
129.20	159.20	5.77	53.33	40.82	1.05	2.44
168.90	198.90	5.78	50.64	39.38	1.06	2.35
208.60	238.60	5.78	48.27	38.49	1.08	2.40
248.30	278.30	5.80	46.07	37.77	1.08	2.41
287.90	317.90	5.85	44.70	36.82	1.10	2.39
327.60	357.60	5.85	43.25	35.90	1.14	2.48
367.30	397.30	5.81	41.23	34.68	1.16	2.44
407.00	437.00	5.87	40.00	33.85	1.15	2.50
446.70	476.70	5.98	39.88	32.68	1.17	2.53
486.40	516.40	5.92	39.70	31.09	1.24	2.51
526.10	556.10	5.87	39.38	29.76	1.33	2.54
565.80	595.80	5.90	38.47	28.55	1.40	2.56

Electrical Schematic

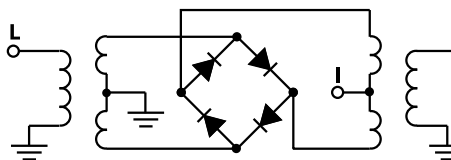

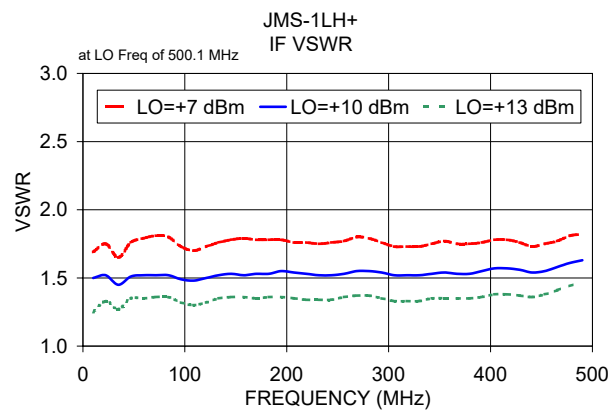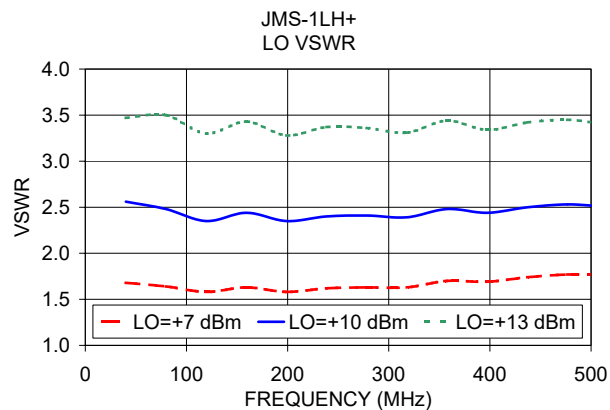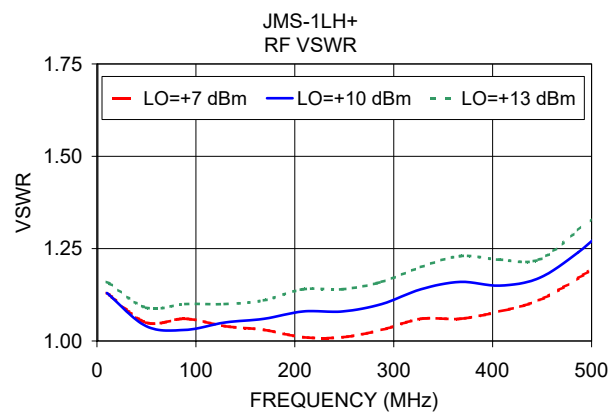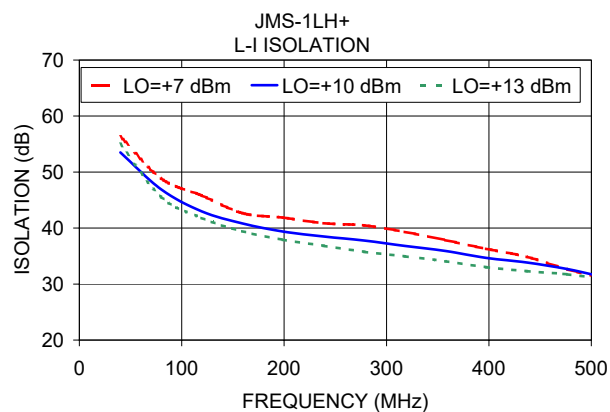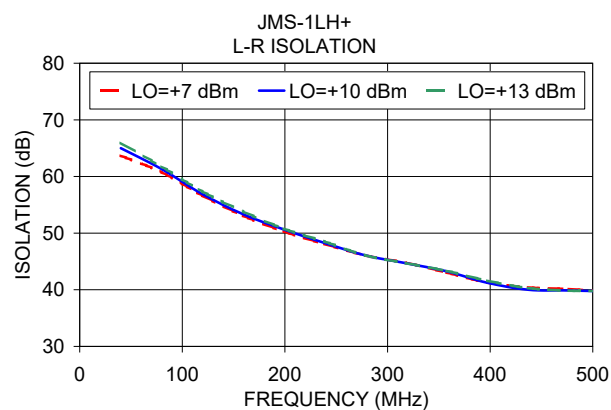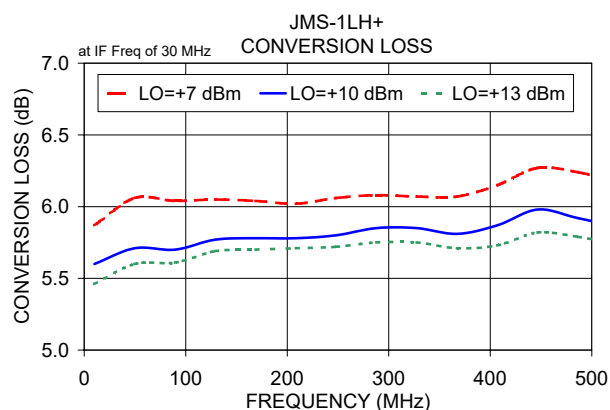

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

JMS-1LH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+7	+10	+13
5.0	35.0	6.14	5.87	5.71
10.0	40.0	6.47	6.17	5.99
49.8	79.8	6.06	5.71	5.60
89.5	119.5	6.04	5.70	5.61
129.2	159.2	6.05	5.77	5.69
168.9	198.9	6.04	5.78	5.70
208.6	238.6	6.02	5.78	5.71
248.3	278.3	6.06	5.80	5.72
287.9	317.9	6.08	5.85	5.75
327.6	357.6	6.07	5.85	5.75
367.3	397.3	6.07	5.81	5.71
446.7	476.7	6.27	5.98	5.82
486.4	516.4	6.24	5.92	5.79
526.1	556.1	6.18	5.87	5.75
565.8	595.8	6.19	5.90	5.79
585.6	615.6	6.25	5.95	5.85
625.3	655.3	6.38	6.08	5.96
645.2	675.2	6.48	6.18	6.04
684.9	714.9	6.65	6.33	6.18
704.7	734.7	6.77	6.44	6.26
744.4	774.4	6.90	6.57	6.36
764.3	794.3	6.93	6.59	6.37
803.9	833.9	7.00	6.60	6.38
823.8	853.8	7.00	6.59	6.37
863.5	893.5	7.01	6.61	6.41
883.3	913.3	6.96	6.57	6.38
923.0	953.0	7.07	6.68	6.48
942.9	972.9	7.12	6.73	6.53
1002.4	1032.4	7.45	6.98	6.79
1042.1	1072.1	7.76	7.23	6.98
1061.9	1091.9	7.97	7.43	7.15
1101.6	1131.6	8.39	7.78	7.46
1121.5	1151.5	8.67	8.03	7.70
1161.2	1191.2	9.23	8.50	8.13
1181.0	1211.0	9.55	8.77	8.39
1220.7	1250.7	10.16	9.34	8.95
1240.6	1270.6	10.53	9.71	9.30
1280.3	1310.3	11.33	10.58	10.18
1300.1	1330.1	11.73	11.03	10.63

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	21.57	24.56	28.68
49.8	79.8	20.21	22.22	23.03
89.5	119.5	21.22	22.99	23.67
129.2	159.2	22.02	21.38	27.95
168.9	198.9	20.01	22.54	21.67
208.6	238.6	19.80	24.62	20.50
248.3	278.3	22.66	19.82	17.34
287.9	317.9	20.64	19.50	18.48
327.6	357.6	23.59	17.91	17.61
367.3	397.3	16.56	16.06	17.93
407.0	437.0	14.17	13.67	15.16
446.7	476.7	15.83	14.72	15.49
486.4	516.4	19.97	17.79	21.11
526.1	556.1	27.65	19.59	21.73
565.8	595.8	22.09	19.42	19.37
585.6	615.6	21.23	18.56	19.53
625.3	655.3	14.44	16.86	19.07
645.2	675.2	11.95	15.45	19.17
684.9	714.9	8.70	11.27	15.87
704.7	734.7	7.89	9.64	13.34
744.4	774.4	7.17	8.21	10.61
764.3	794.3	7.33	8.45	10.63
803.9	833.9	7.60	9.21	11.71
863.5	893.5	8.92	11.36	14.59
883.3	913.3	9.45	12.12	15.61
923.0	953.0	10.48	13.36	17.50
942.9	972.9	11.19	14.20	19.49
982.6	1012.6	13.69	18.65	20.50
1002.4	1032.4	15.40	22.17	17.55
1042.1	1072.1	15.20	15.75	15.74
1061.9	1091.9	13.68	14.43	15.83
1101.6	1131.6	11.76	13.20	15.09
1121.5	1151.5	11.33	13.65	15.99
1161.2	1191.2	10.92	15.01	18.99
1181.0	1211.0	11.49	16.15	18.07
1220.7	1250.7	13.62	16.20	15.38
1240.6	1270.6	15.31	14.87	14.71
1280.3	1310.3	16.62	13.80	14.03
1300.1	1330.1	16.01	13.72	14.28

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+5dBm (dB)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	0.92	0.68	0.47
49.8	79.8	1.18	0.93	0.74
89.5	119.5	1.23	0.91	0.72
129.2	159.2	1.22	0.87	0.70
168.9	198.9	1.17	0.85	0.68
208.6	238.6	1.25	0.88	0.71
248.3	278.3	1.20	0.88	0.71
287.9	317.9	1.17	0.87	0.73
327.6	357.6	1.22	0.88	0.73
367.3	397.3	1.22	0.94	0.78
407.0	437.0	1.15	0.89	0.78
446.7	476.7	1.05	0.81	0.73
486.4	516.4	1.18	0.89	0.78
526.1	556.1	1.25	0.91	0.80
565.8	595.8	1.45	1.03	0.83
585.6	615.6	1.46	1.03	0.83
625.3	655.3	1.65	1.21	0.96
645.2	675.2	1.62	1.18	0.94
684.9	714.9	1.74	1.31	1.08
704.7	734.7	1.69	1.29	1.07
744.4	774.4	1.71	1.37	1.12
764.3	794.3	1.70	1.37	1.15
803.9	833.9	1.75	1.39	1.16
863.5	893.5	1.85	1.48	1.26
883.3	913.3	2.00	1.60	1.38
923.0	953.0	2.06	1.68	1.44
942.9	972.9	2.15	1.76	1.53
982.6	1012.6	2.19	1.83	1.59
1002.4	1032.4	2.16	1.85	1.64
1042.1	1072.1	2.19	1.90	1.70
1061.9	1091.9	2.11	1.88	1.69
1101.6	1131.6	2.18	2.01	1.84
1121.5	1151.5	2.10	1.97	1.81
1161.2	1191.2	2.01	1.96	1.83
1181.0	1211.0	1.98	1.97	1.87
1220.7	1250.7	1.80	1.87	1.80
1240.6	1270.6	1.71	1.76	1.73
1280.3	1310.3	1.37	1.41	1.45
1300.1	1330.1	1.24	1.25	1.30

REV. X2

JMS-1LH+

100817

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

JMS-1LH+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+10			+10			+10
240.0	10.1	5.90	10.0	20.1	5.75	490.0	10.1	6.02
234.1	16.0	5.88	22.3	32.4	5.65	477.7	22.4	5.99
228.2	21.9	5.85	34.6	44.7	5.64	465.4	34.7	5.95
222.3	27.8	5.85	46.9	57.0	5.68	453.1	47.0	5.92
216.4	33.7	5.85	59.2	69.3	5.66	440.8	59.3	5.95
210.5	39.6	5.84	71.5	81.6	5.72	428.5	71.6	5.85
204.6	45.5	5.84	83.8	93.9	5.72	416.2	83.9	5.82
198.7	51.4	5.80	96.2	106.3	5.71	403.8	96.3	5.79
192.8	57.3	5.81	108.5	118.6	5.72	391.5	108.6	5.74
186.9	63.2	5.77	120.8	130.9	5.71	379.2	120.9	5.73
181.0	69.1	5.80	133.1	143.2	5.71	366.9	133.2	5.72
175.1	75.0	5.81	145.4	155.5	5.76	354.6	145.5	5.69
169.2	80.9	5.77	157.7	167.8	5.79	342.3	157.8	5.70
163.3	86.8	5.77	170.0	180.1	5.79	330.0	170.1	5.71
157.4	92.7	5.76	182.3	192.4	5.81	317.7	182.4	5.71
151.5	98.6	5.72	194.6	204.7	5.80	305.4	194.7	5.71
145.6	104.5	5.75	206.9	217.0	5.82	293.1	207.0	5.69
139.7	110.4	5.72	219.2	229.3	5.83	280.8	219.3	5.70
133.8	116.3	5.72	231.5	241.6	5.83	268.5	231.6	5.73
127.9	122.2	5.67	243.8	253.9	5.85	256.2	243.9	5.74
122.1	128.0	5.66	256.2	266.3	5.88	243.8	256.3	5.76
116.2	133.9	5.68	268.5	278.6	5.88	231.5	268.6	5.79
110.3	139.8	5.72	280.8	290.9	5.89	219.2	280.9	5.77
104.4	145.7	5.70	293.1	303.2	5.92	206.9	293.2	5.78
98.5	151.6	5.71	305.4	315.5	5.93	194.6	305.5	5.76
92.6	157.5	5.70	317.7	327.8	5.98	182.3	317.8	5.74
86.7	163.4	5.70	330.0	340.1	5.98	170.0	330.1	5.74
80.8	169.3	5.71	342.3	352.4	5.96	157.7	342.4	5.75
74.9	175.2	5.71	354.6	364.7	5.96	145.4	354.7	5.77
69.0	181.1	5.71	366.9	377.0	5.97	133.1	367.0	5.80
63.1	187.0	5.69	379.2	389.3	5.97	120.8	379.3	5.80
57.2	192.9	5.70	391.5	401.6	5.96	108.5	391.6	5.81
51.3	198.8	5.70	403.8	413.9	5.94	96.2	403.9	5.84
45.4	204.7	5.73	416.2	426.3	5.96	83.8	416.3	5.86
39.5	210.6	5.74	428.5	438.6	5.99	71.5	428.6	5.90
33.6	216.5	5.74	440.8	450.9	6.03	59.2	440.9	5.94
27.7	222.4	5.73	453.1	463.2	6.04	46.9	453.2	5.93
21.8	228.3	5.75	465.4	475.5	6.03	34.6	465.5	5.96
15.9	234.2	5.78	477.7	487.8	6.01	22.3	477.8	5.96
10.0	240.1	5.89	490.0	500.1	6.02	10.0	490.1	6.09

REV. X2

JMS-1LH+

100817

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

JMS-1LH+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+7	+10	+13	+7	+10	+13
5.0	65.11	67.37	69.67	54.46	56.74	57.76
10.0	63.38	65.16	66.06	52.78	52.79	52.34
49.8	60.76	61.31	61.75	48.86	46.92	45.54
89.5	56.64	56.90	57.35	45.82	42.98	41.80
129.2	53.06	53.33	53.81	42.66	40.82	39.44
168.9	50.30	50.64	50.78	41.87	39.38	37.90
208.6	48.10	48.27	48.51	40.87	38.49	36.83
248.3	46.06	46.07	46.08	40.47	37.77	35.75
287.9	44.78	44.70	44.70	39.32	36.82	34.95
327.6	43.04	43.25	43.33	37.84	35.90	34.06
367.3	41.27	41.23	41.61	36.31	34.68	33.00
446.7	40.12	39.88	39.84	32.62	32.68	31.73
486.4	39.67	39.70	39.71	30.90	31.09	30.75
526.1	39.33	39.38	39.07	29.54	29.76	29.40
565.8	38.63	38.47	38.08	28.55	28.55	28.29
585.6	38.29	38.12	37.76	28.43	28.32	27.93
625.3	37.05	37.13	37.10	28.13	27.88	27.17
645.2	36.39	36.71	36.87	27.91	27.97	27.06
684.9	34.75	35.55	36.18	27.29	28.30	27.29
704.7	34.16	35.05	35.92	26.81	28.18	27.43
744.4	33.17	34.33	35.54	25.99	27.82	27.95
764.3	32.99	34.45	35.81	25.73	27.63	27.84
803.9	33.00	34.94	36.74	25.16	26.81	27.02
823.8	33.28	35.56	37.36	24.80	26.19	26.25
863.5	34.86	37.49	38.84	24.12	25.18	25.25
883.3	35.49	37.75	38.53	23.61	24.55	24.65
923.0	36.51	37.78	37.92	22.69	23.68	23.87
942.9	36.03	36.81	36.82	22.45	23.41	23.67
1002.4	33.92	34.02	34.00	22.32	23.15	23.46
1042.1	32.74	32.51	32.39	22.34	23.29	23.68
1061.9	31.89	31.55	31.36	22.41	23.44	23.83
1101.6	30.48	30.27	29.99	22.21	23.70	24.19
1121.5	29.91	29.72	29.26	22.11	23.87	24.44
1161.2	28.85	28.80	28.37	21.96	24.24	25.25
1181.0	28.44	28.47	28.11	21.77	24.29	25.53
1220.7	27.50	27.77	27.51	21.32	24.32	26.15
1240.6	27.15	27.55	27.33	21.24	24.46	26.57
1280.3	26.34	26.85	26.91	20.97	24.48	27.01
1300.1	25.96	26.57	26.69	20.96	24.62	27.43

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+7	+10	+13
10.1	40.1	46.61	45.92	44.89
49.8	79.8	34.42	34.69	34.86
89.5	119.5	30.16	30.53	30.32
129.2	159.2	27.53	27.78	27.80
168.9	198.9	25.79	26.02	26.20
208.6	238.6	24.64	25.11	25.28
248.3	278.3	23.91	24.09	24.36
287.9	317.9	23.84	24.21	24.43
327.6	357.6	23.48	24.21	24.81
367.3	397.3	23.21	24.11	24.83
407.0	437.0	23.43	23.95	24.39
446.7	476.7	24.21	24.39	24.58
486.4	516.4	24.67	25.15	25.69
526.1	556.1	23.07	23.97	24.79
565.8	595.8	20.00	20.62	21.19
585.6	615.6	18.63	19.04	19.45
625.3	655.3	16.62	16.68	16.81
645.2	675.2	15.87	15.84	15.89
684.9	714.9	14.79	14.80	14.85
704.7	734.7	14.35	14.36	14.45
744.4	774.4	13.65	13.60	13.67
764.3	794.3	13.38	13.31	13.35
823.8	853.8	12.66	12.56	12.63
863.5	893.5	12.36	12.35	12.44
883.3	913.3	12.16	12.17	12.25
923.0	953.0	11.92	11.95	12.06
942.9	972.9	11.80	11.83	11.91
982.6	1012.6	11.61	11.70	11.87
1002.4	1032.4	11.52	11.64	11.80
1042.1	1072.1	11.38	11.53	11.67
1061.9	1091.9	11.22	11.42	11.60
1101.6	1131.6	10.93	11.15	11.32
1121.5	1151.5	10.70	10.93	11.14
1161.2	1191.2	10.25	10.45	10.59
1181.0	1211.0	9.96	10.18	10.26
1220.7	1250.7	9.39	9.55	9.58
1240.6	1270.6	9.09	9.20	9.21
1280.3	1310.3	8.54	8.58	8.48
1300.1	1330.1	8.27	8.23	8.19

REV. X2
JMS-1LH+
100817
Page 3 of 5

Frequency Mixer

JMS-1LH+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+7	+10	+13
5.0	35.0	1.15	1.16	1.18
10.0	40.0	1.09	1.08	1.11
49.8	79.8	1.05	1.04	1.09
89.5	119.5	1.06	1.03	1.10
129.2	159.2	1.04	1.05	1.10
168.9	198.9	1.03	1.06	1.11
208.6	238.6	1.01	1.08	1.14
248.3	278.3	1.01	1.08	1.14
287.9	317.9	1.03	1.10	1.16
327.6	357.6	1.06	1.14	1.20
367.3	397.3	1.06	1.16	1.23
446.7	476.7	1.11	1.17	1.22
486.4	516.4	1.17	1.24	1.30
526.1	556.1	1.24	1.33	1.38
565.8	595.8	1.29	1.40	1.46
585.6	615.6	1.31	1.42	1.49
625.3	655.3	1.32	1.44	1.51
645.2	675.2	1.31	1.43	1.51
684.9	714.9	1.29	1.40	1.48
704.7	734.7	1.28	1.38	1.45
744.4	774.4	1.26	1.33	1.40
764.3	794.3	1.27	1.33	1.40
803.9	833.9	1.27	1.33	1.39
823.8	853.8	1.30	1.36	1.41
863.5	893.5	1.35	1.41	1.45
883.3	913.3	1.41	1.45	1.49
923.0	953.0	1.54	1.58	1.61
942.9	972.9	1.62	1.66	1.68
982.6	1012.6	1.82	1.85	1.87
1002.4	1032.4	1.94	1.96	1.97
1042.1	1072.1	2.22	2.21	2.21
1061.9	1091.9	2.37	2.34	2.33
1101.6	1131.6	2.67	2.60	2.56
1121.5	1151.5	2.81	2.72	2.67
1161.2	1191.2	3.03	2.92	2.84
1181.0	1211.0	3.12	2.99	2.90
1220.7	1250.7	3.24	3.11	3.02
1240.6	1270.6	3.29	3.16	3.06
1280.3	1310.3	3.35	3.23	3.14
1300.1	1330.1	3.34	3.23	3.14

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+7	+10	+13
5.0	1.61	2.42	3.53
10.0	1.58	2.33	3.49
49.8	1.64	2.48	3.50
89.5	1.58	2.35	3.30
129.2	1.63	2.44	3.43
168.9	1.58	2.35	3.28
208.6	1.62	2.40	3.37
248.3	1.63	2.41	3.36
287.9	1.63	2.39	3.31
327.6	1.70	2.48	3.44
367.3	1.69	2.44	3.34
446.7	1.77	2.53	3.45
486.4	1.77	2.51	3.41
526.1	1.81	2.54	3.46
565.8	1.85	2.56	3.45
585.6	1.88	2.59	3.47
625.3	1.95	2.65	3.52
645.2	1.97	2.66	3.52
684.9	2.01	2.72	3.56
704.7	2.03	2.74	3.59
744.4	2.03	2.73	3.58
764.3	2.04	2.74	3.59
803.9	2.03	2.72	3.56
823.8	2.00	2.69	3.53
863.5	1.99	2.67	3.52
883.3	1.99	2.68	3.53
923.0	1.99	2.68	3.50
942.9	2.00	2.68	3.50
982.6	2.07	2.73	3.55
1002.4	2.11	2.76	3.56
1042.1	2.15	2.77	3.56
1061.9	2.19	2.81	3.59
1101.6	2.28	2.86	3.62
1121.5	2.30	2.86	3.60
1161.2	2.37	2.92	3.65
1181.0	2.42	2.95	3.68
1220.7	2.48	2.97	3.67
1240.6	2.51	2.99	3.68
1280.3	2.60	3.05	3.73
1300.1	2.65	3.07	3.73

IF (OUT) (MHz)	IF VSWR @LO=500.1MHz (:1)		
	@LO (dBm)		
	+7	+10	+13
5.0	1.31	1.18	1.08
10.0	1.31	1.18	1.08
22.4	1.75	1.52	1.33
34.7	1.65	1.45	1.27
47.0	1.76	1.51	1.35
59.3	1.79	1.52	1.35
71.6	1.81	1.52	1.36
83.9	1.80	1.52	1.36
96.3	1.73	1.49	1.32
108.6	1.70	1.48	1.30
120.9	1.73	1.50	1.32
133.2	1.76	1.52	1.35
145.5	1.78	1.53	1.36
157.8	1.79	1.52	1.36
170.1	1.78	1.53	1.35
182.4	1.78	1.53	1.36
194.7	1.78	1.55	1.36
207.0	1.76	1.54	1.35
219.3	1.76	1.53	1.34
231.6	1.75	1.52	1.34
243.9	1.76	1.52	1.34
256.3	1.77	1.53	1.36
268.6	1.80	1.55	1.37
280.9	1.79	1.55	1.37
293.2	1.76	1.54	1.35
305.5	1.73	1.52	1.33
330.1	1.73	1.52	1.33
342.4	1.75	1.53	1.35
354.7	1.77	1.54	1.35
367.0	1.75	1.53	1.35
379.3	1.75	1.53	1.35
391.6	1.76	1.55	1.36
403.9	1.78	1.57	1.38
416.3	1.78	1.57	1.38
428.6	1.76	1.56	1.37
440.9	1.73	1.54	1.36
453.2	1.75	1.55	1.38
465.5	1.77	1.58	1.41
477.8	1.81	1.61	1.44
490.1	1.82	1.63	1.47

REV. X2

JMS-1LH+

100817

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	35	24	44	28	44	36	52	43	58
1	-	19	+0	30	12	34	18	32	26	54	46	54
2	93	60	40	71	40	58	40	53	40	51	44	62
3	>100	46	45	51	49	54	44	48	42	55	47	64
4	>100	70	59	71	58	70	57	66	53	64	50	64
5	>100	62	65	68	56	72	54	66	51	67	51	61
6	>100	74	65	86	67	79	69	78	69	77	66	80
7	>100	78	69	82	69	81	75	86	87	77	71	74
8	>100	86	79	82	79	90	77	91	77	87	80	82
9	>100	93	83	84	76	82	76	83	84	81	>94	93
10	>100	>94	92	>94	>94	>94	85	89	85	>94	79	>94
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; 0.00 dBm.
LO IN: 280.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -5.98 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	10	25	12	29	15	28	20	40	25	41
1	-	19	+0	29	12	32	17	30	25	53	44	45
2	>100	69	45	63	45	67	44	57	43	54	48	71
3	>100	66	64	70	65	>84	58	70	62	79	60	77
4	>100	>84	76	83	77	81	78	>84	75	>84	77	>84
5	>100	>84	>84	>84	>84	>84	83	>84	81	>84	82	>84
6	>100	>84	>84	>84	>84	>84	81	>84	>84	>84	>84	>84
7	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
8	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
9	>100	>84	>84	>84	>84	>84	>84	>84	>84	67	>84	>84
10	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	79	>84
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; -10.00 dBm.
LO IN: 280.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -15.91 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
JMS-1LH+
100817
Page 5 of 5




Frequency Mixer


JMS-1LH+

Typical Performance Curves


Conversion Loss @ IF=30MHz

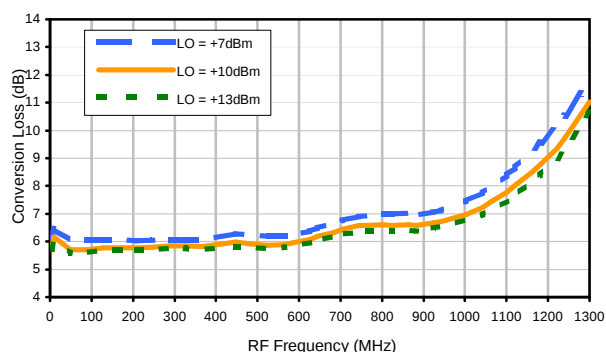


Conversion Loss vs. IF @ RF=250.1MHz

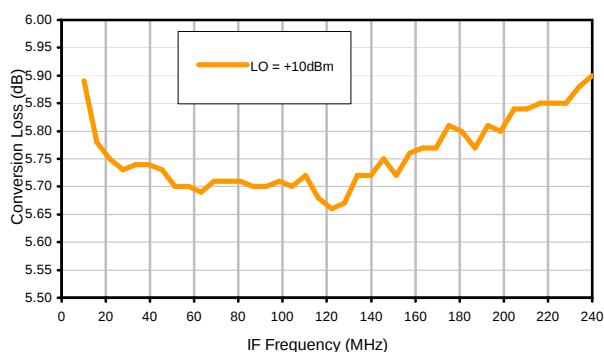


Conversion Loss vs. IF @ RF=10.1MHz

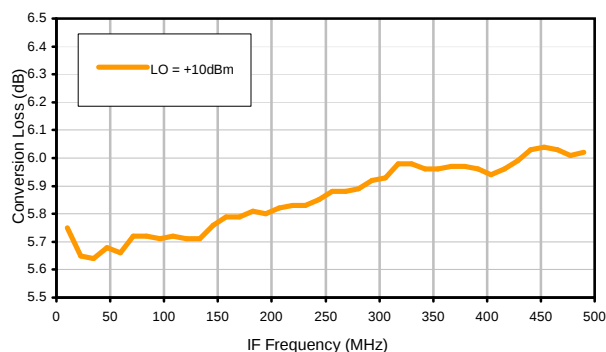


Conversion Loss vs. IF @ RF=500.1MHz

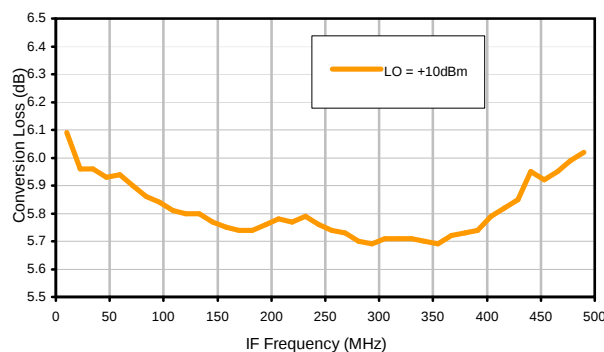

IP3 Input

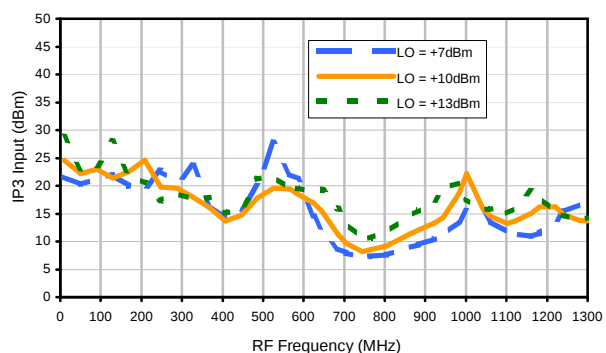

Compression @ RF IN=+5dBm

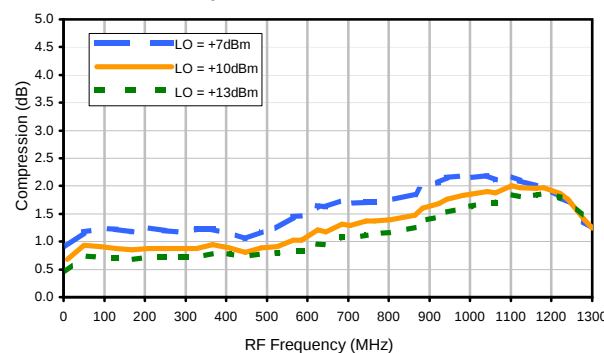

REV. X2

JMS-1LH+

100817

Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Frequency Mixer


JMS-1LH+

Typical Performance Curves


LO-RF Isolation

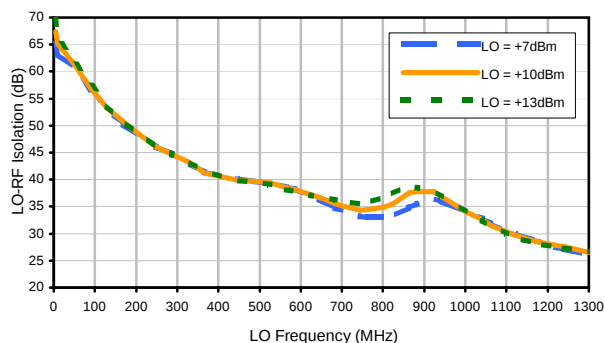


LO-IF Isolation

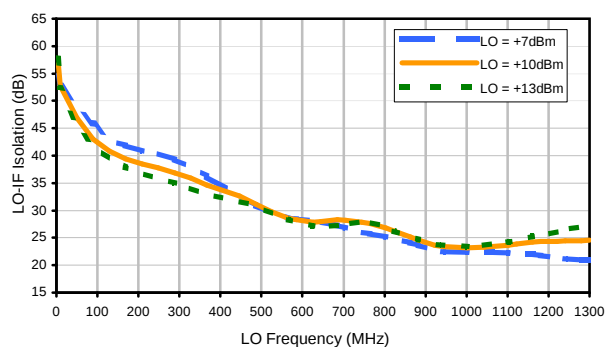


RF-IF Isolation

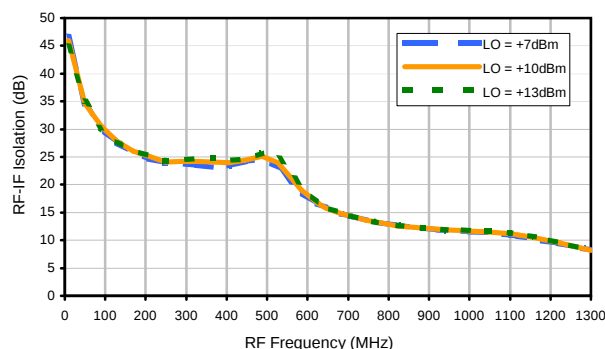


RF VSWR

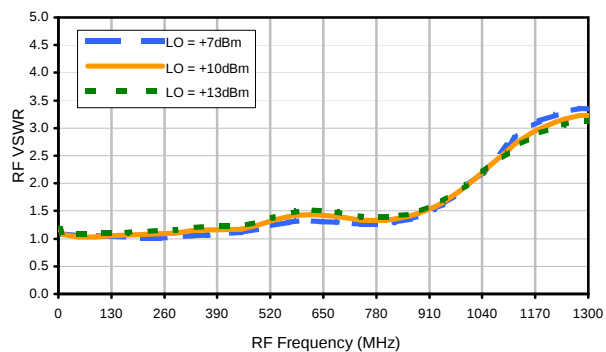

LO VSWR

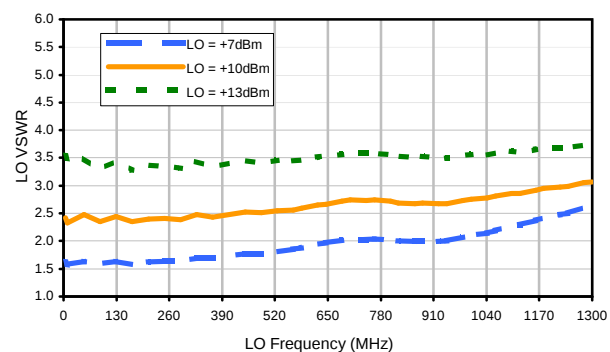

IF VSWR

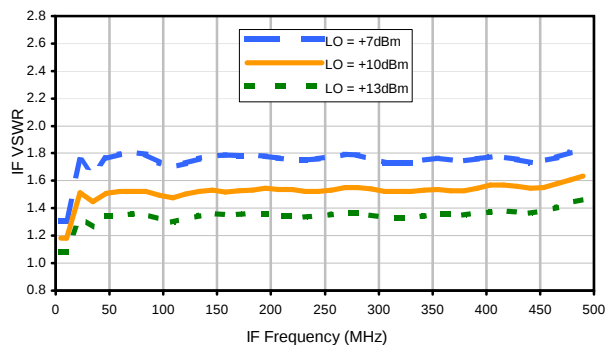

REV. X2

JMS-1LH+

100817

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	35	24	44	28	44	36	52	43	58
1	-	19	+0	30	12	34	18	32	26	54	46	54
2	93	60	40	71	40	58	40	53	40	51	44	62
3	>100	46	45	51	49	54	44	48	42	55	47	64
4	>100	70	59	71	58	70	57	66	53	64	50	64
5	>100	62	65	68	56	72	54	66	51	67	51	61
6	>100	74	65	86	67	79	69	78	69	77	66	80
7	>100	78	69	82	69	81	75	86	87	77	71	74
8	>100	86	79	82	79	90	77	91	77	87	80	82
9	>100	93	83	84	76	82	76	83	84	81	>94	93
10	>100	>94	92	>94	>94	>94	85	89	85	>94	79	>94
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; 0.00 dBm.
LO IN: 280.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -5.98 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	10	25	12	29	15	28	20	40	25	41
1	-	19	+0	29	12	32	17	30	25	53	44	45
2	>100	69	45	63	45	67	44	57	43	54	48	71
3	>100	66	64	70	65	>84	58	70	62	79	60	77
4	>100	>84	76	83	77	81	78	>84	75	>84	77	>84
5	>100	>84	>84	>84	>84	>84	83	>84	81	>84	82	>84
6	>100	>84	>84	>84	>84	>84	81	>84	>84	>84	>84	>84
7	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
8	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84	>84
9	>100	>84	>84	>84	>84	>84	>84	>84	>84	67	>84	>84
10	>100	>84	>84	>84	>84	>84	>84	>84	>84	>84	79	>84
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; -10.00 dBm.
LO IN: 280.01 MHz; +10.00 dBm
IF OUT: 29.91 MHz; -15.91 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
JMS-1LH+
100817
Page 3 of 3




Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Outline Dimensions

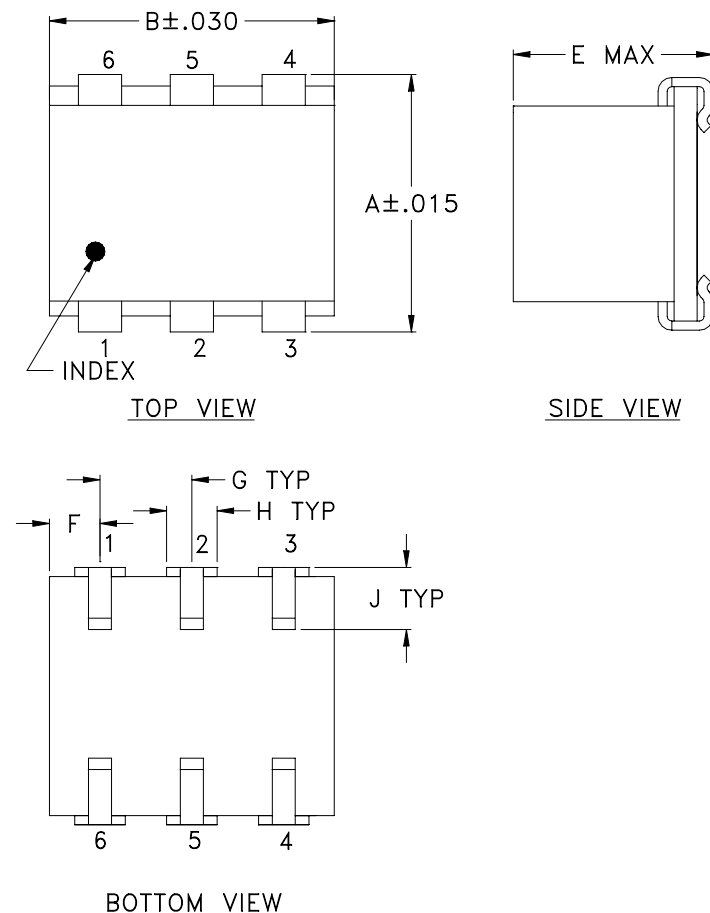

PCB Land Pattern

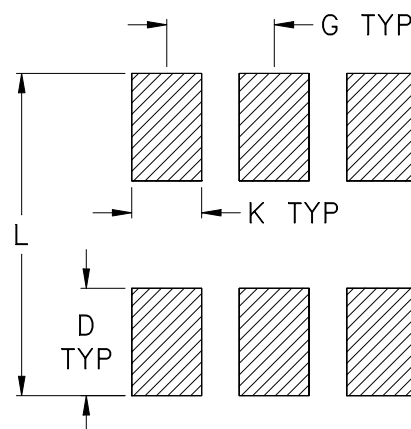

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT. GRAM
BH292	.280 (7.11)	.310 (7.87)	- -	.100 (2.54)	.225 (5.72)	.055 (1.40)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.300 (7.62)	.45

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F24

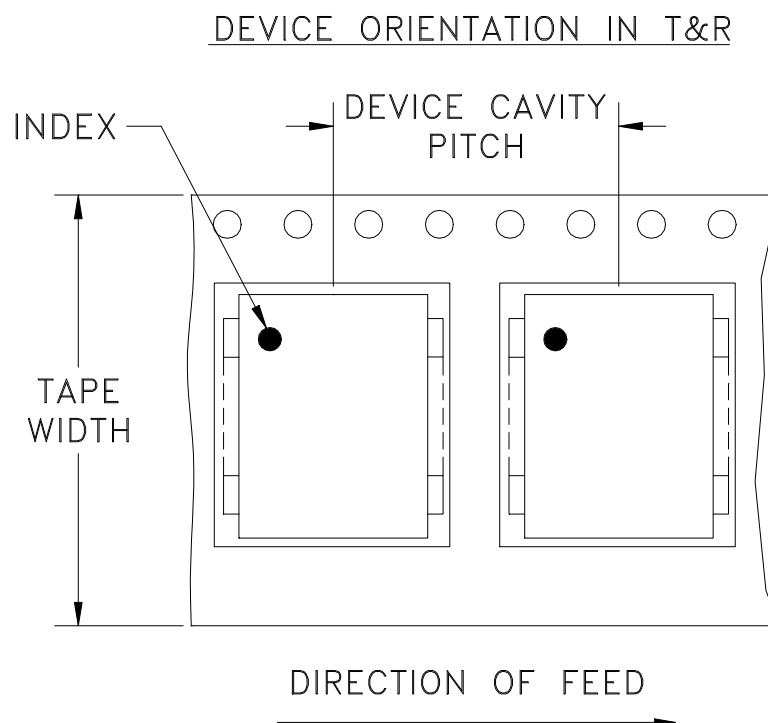

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
16	12	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION
FOR BH292, CD541/542/636/637, TT100/240 CASE
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS

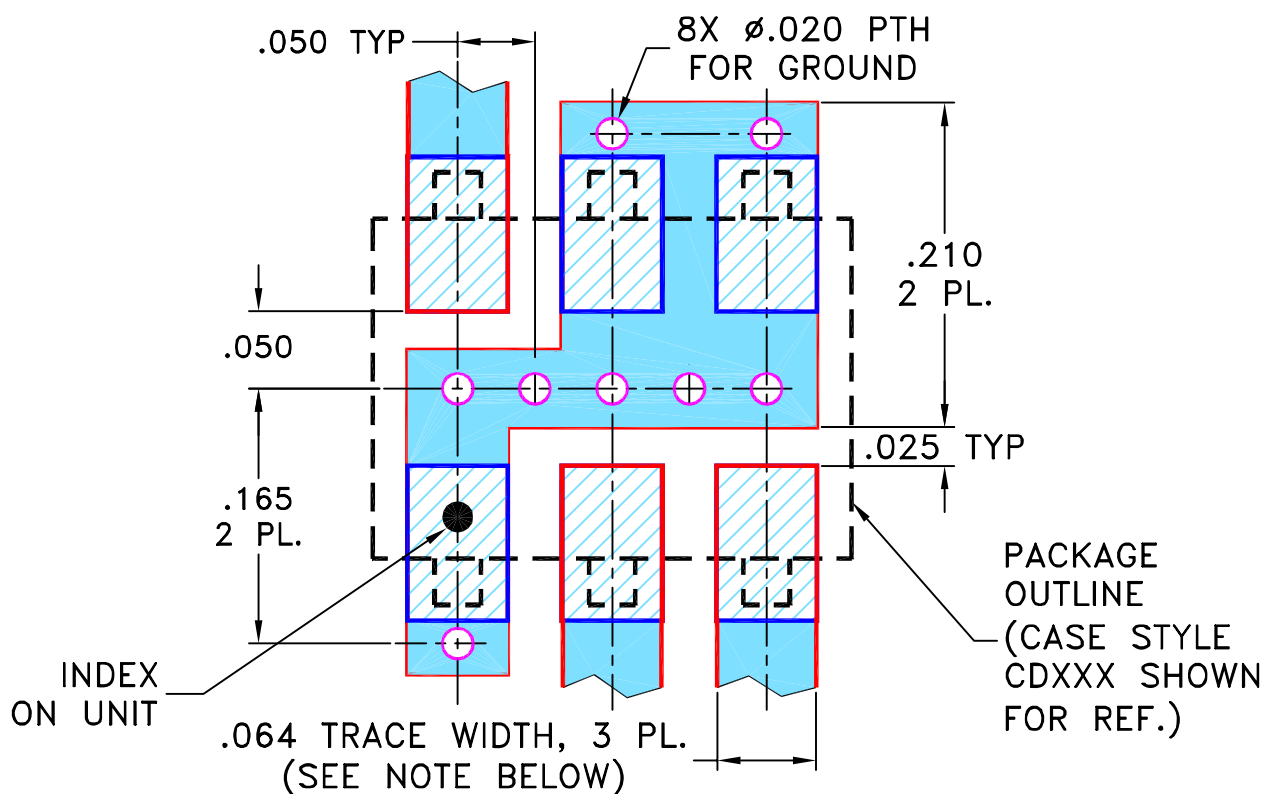

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

MMG

07/17/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/05/02



Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,
 CD541/542/636/637, TT100/240, TB-03

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-052

REV:

C

FILE:

98PL052

SCALE:

8:1

SHEET:

1 OF 1



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to
Data Sheet of the DUT

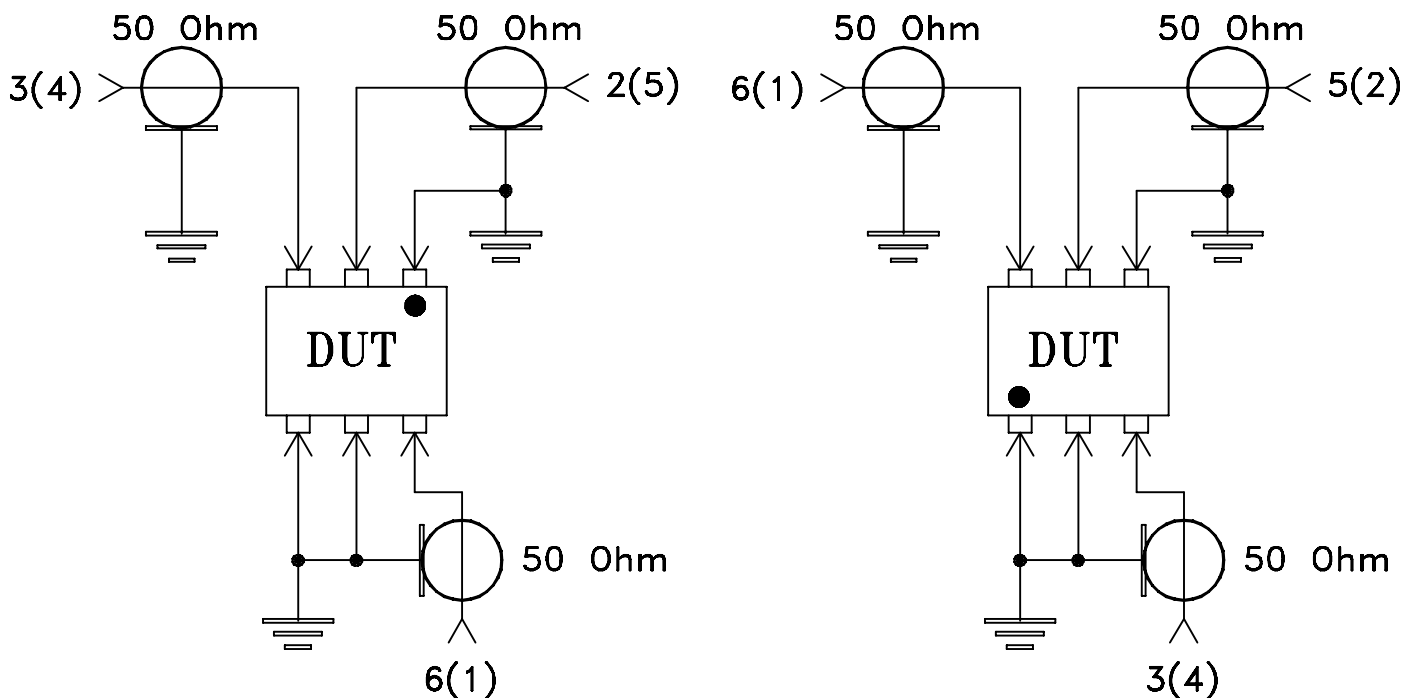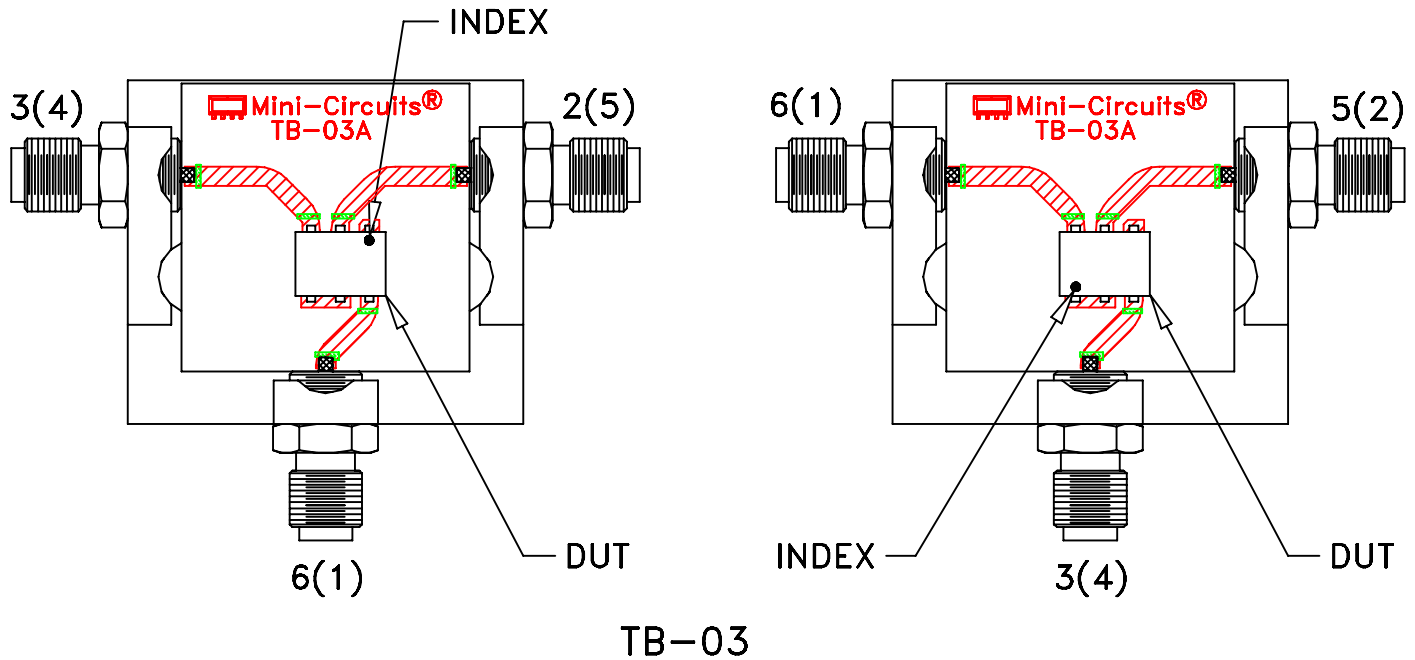

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215