

Ceramic Active Mixer

Level -3 (LO Power -3 dBm) 750 to 2400 MHz

MACA-242H+



Generic photo used for illustration purposes only

CASE STYLE: DZ1034


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW
IF Current	40mA
LO Power	10mW


Pin Connections

LO	10
RF	5
IF	3
DC	7
GROUND	1,2,4,6,8,9

Outline Drawing

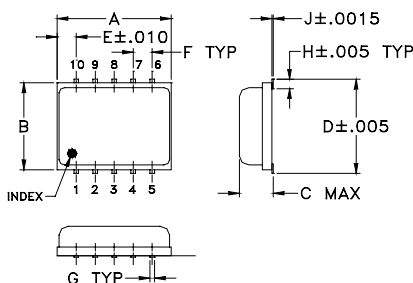


PCB Land Pattern



Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.30	.250	.105	.266	.050	.050	.012
7.62	6.35	2.67	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76		0.3

Demo Board MCL P/N: TB-403
Suggested PCB Layout (PL-145)



- NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 6.1 dB typ.
- wide bandwidth, 750 to 2400 MHz
- LTCC double balanced mixer with LO amplifier
- aqueous washable
- low profile
- low cost
- protected by U.S. Patent 7,027,795

Applications

- PCN
- defense & weather radar
- cellular
- UHF TV

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		DC POWER		IP3 at center band (dBm)
		$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Volt	Current (mA) Max.	
750-2400	DC-500	6.1	0.1	9.8	20	4	55	28	5	110	18


1 dB Compr. +10 dBm typ.

*Conversion Loss at IF= 30 MHz.

Typical Performance Data









Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO -3dBm	LO -3dBm	LO -3dBm	LO -3dBm	LO -3dBm
740.00	710.00	5.98	25.78	32.91	2.60	2.24
800.00	770.00	6.25	21.44	40.53	2.61	2.11
900.00	870.00	9.01	21.78	51.64	6.73	1.96
1000.00	970.00	7.39	15.99	36.56	4.55	1.90
1100.00	1070.00	6.51	11.39	46.11	2.40	1.60
1200.00	1170.00	8.22	14.01	56.21	4.95	1.45
1300.00	1270.00	7.75	23.06	62.69	4.48	1.25
1400.00	1370.00	6.35	19.72	65.30	2.44	1.10
1500.00	1470.00	6.15	17.29	69.44	2.06	1.42
1600.00	1570.00	5.22	12.57	71.04	1.36	1.53
1700.00	1670.00	5.23	8.87	61.70	1.21	1.49
1800.00	1770.00	5.58	14.87	58.23	1.65	1.38
1900.00	1870.00	5.41	18.11	54.22	1.34	1.29
2000.00	1970.00	6.16	17.88	52.30	1.37	1.16
2100.00	2070.00	8.05	14.77	52.20	2.70	1.24
2140.00	2110.00	7.81	16.43	53.26	2.87	1.33
2200.00	2170.00	7.37	15.65	57.24	3.02	1.45
2300.00	2270.00	6.90	16.43	60.29	2.90	1.72
2340.00	2310.00	6.79	17.73	58.64	2.66	1.88
2400.00	2370.00	6.92	22.78	58.59	2.53	2.05

Electrical Schematic

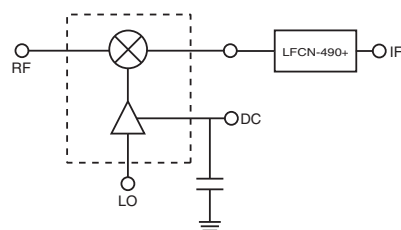

LFCN-490+ is added to improve L-I isolation.



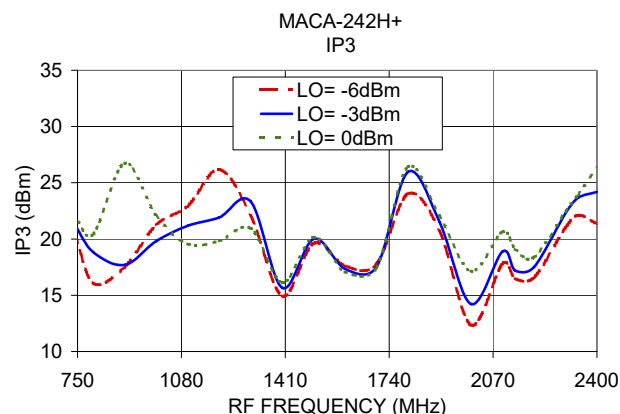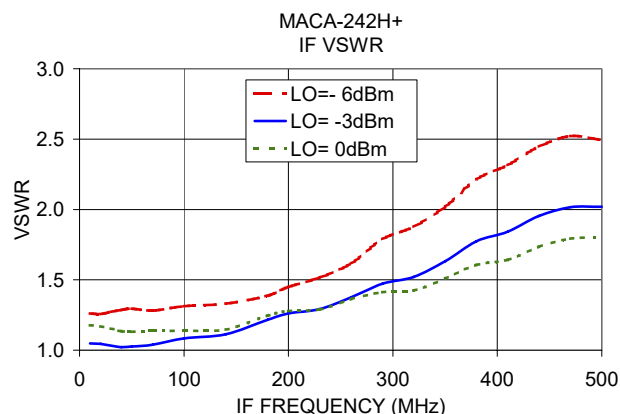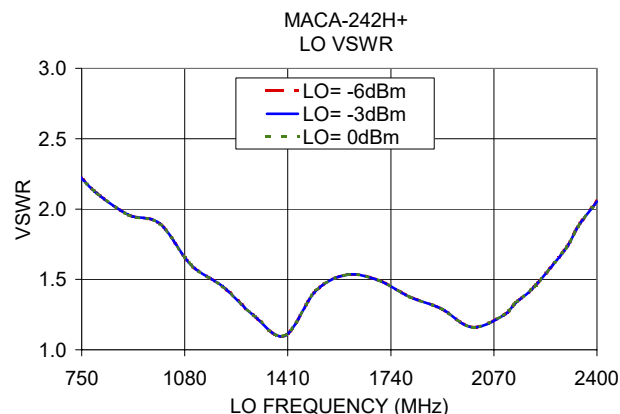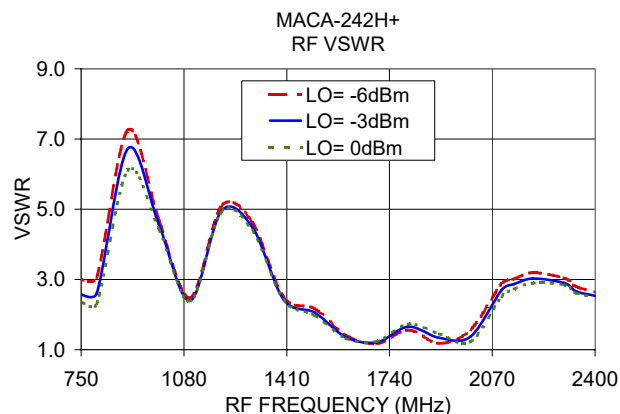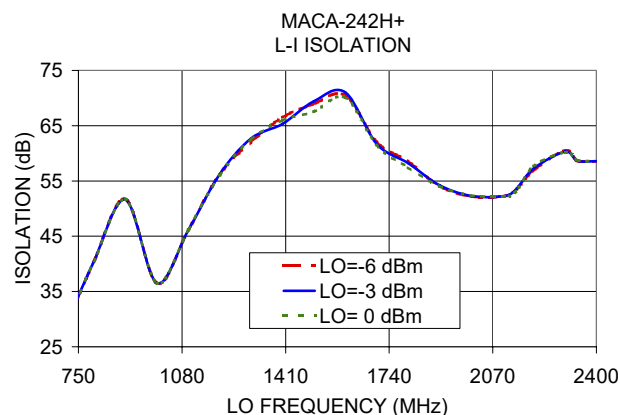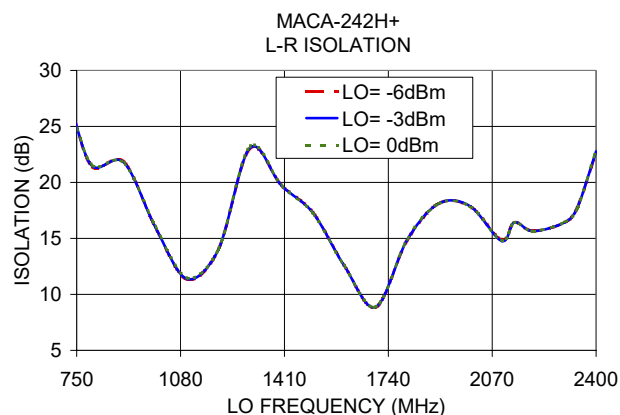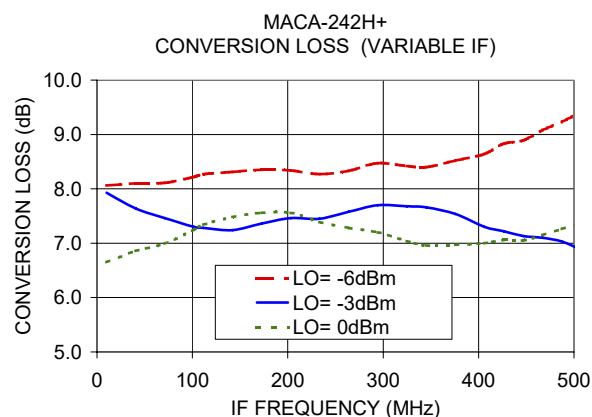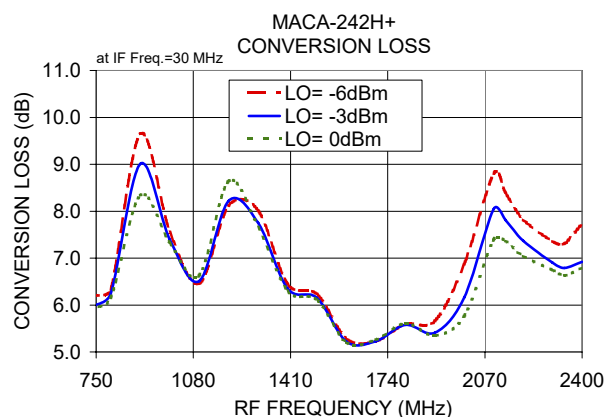

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

MACA-242H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		-6	-3	0
290.1	260.1	19.52	13.34	10.53
360.1	330.1	8.50	7.12	6.25
430.1	400.1	7.58	6.78	6.19
500.1	470.1	8.19	6.99	6.26
570.1	540.1	8.47	7.76	7.27
640.1	610.1	7.10	6.86	6.73
710.1	680.1	6.18	5.95	5.73
780.1	750.1	7.70	7.38	7.06
850.1	820.1	8.62	8.01	7.54
920.1	890.1	7.27	7.13	6.94
990.1	960.1	6.44	6.43	6.32
1060.1	1030.1	7.17	7.22	7.26
1130.1	1100.1	8.60	8.32	8.02
1200.1	1170.1	8.07	7.78	7.69
1280.1	1250.1	8.58	7.98	7.68
1350.1	1320.1	7.83	7.24	6.92
1430.1	1400.1	6.26	6.06	5.88
1500.1	1470.1	5.86	5.81	5.66
1580.1	1550.1	5.85	5.60	5.40
1650.1	1620.1	5.52	5.42	5.35
1730.1	1700.1	5.91	5.87	5.88
1800.1	1770.1	6.23	5.98	5.78
1880.1	1850.1	6.49	5.96	5.62
1950.1	1920.1	8.26	6.88	6.12
2030.1	2000.1	9.19	7.65	6.98
2100.1	2070.1	8.63	7.54	7.05
2180.1	2150.1	8.32	7.50	7.06
2250.1	2220.1	7.99	7.32	6.87
2330.1	2300.1	7.64	7.01	6.65
2400.1	2370.1	7.92	6.84	6.27
2480.1	2450.1	9.52	8.03	6.86
2550.1	2520.1	12.28	9.98	8.64
2630.1	2600.1	14.69	10.75	9.01
2700.1	2670.1	13.64	10.97	9.38
2780.1	2750.1	11.50	9.63	8.65
2850.1	2820.1	11.38	9.43	8.24
2930.1	2900.1	11.76	9.57	7.99
3000.1	2970.1	12.01	10.16	8.53
3080.1	3050.1	12.10	10.86	9.14
3150.1	3120.1	12.83	12.71	11.20

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		-6	-3	0
290.1	260.1	7.43	17.77	19.80
360.1	330.1	14.36	15.57	18.22
430.1	400.1	10.99	13.45	15.37
500.1	470.1	14.19	16.59	18.85
570.1	540.1	16.70	18.76	19.30
640.1	610.1	16.06	17.00	17.72
710.1	680.1	24.06	21.84	20.64
780.1	750.1	18.34	22.21	24.71
850.1	820.1	21.95	27.98	23.21
920.1	890.1	22.25	24.16	25.48
990.1	960.1	19.45	21.03	22.59
1060.1	1030.1	20.88	22.63	24.02
1130.1	1100.1	27.78	31.68	28.77
1200.1	1170.1	27.82	24.24	24.35
1280.1	1250.1	20.43	24.77	27.57
1350.1	1320.1	15.00	16.73	17.66
1430.1	1400.1	12.91	13.65	13.87
1500.1	1470.1	12.69	13.28	13.44
1580.1	1550.1	17.48	18.63	18.49
1650.1	1620.1	20.02	21.23	21.04
1730.1	1700.1	23.54	24.76	26.16
1800.1	1770.1	17.81	20.68	23.54
1880.1	1850.1	17.21	18.86	22.03
1950.1	1920.1	11.64	13.83	15.03
2030.1	2000.1	14.31	16.48	17.04
2100.1	2070.1	15.05	16.17	16.03
2180.1	2150.1	20.44	20.83	21.11
2250.1	2220.1	17.59	20.14	21.13
2330.1	2300.1	21.88	23.80	25.33
2400.1	2370.1	17.13	20.00	22.75
2480.1	2450.1	10.61	13.96	16.89
2550.1	2520.1	18.26	17.11	17.51
2630.1	2600.1	12.35	21.21	23.63
2700.1	2670.1	13.79	21.63	21.46
2780.1	2750.1	15.43	26.70	23.88
2850.1	2820.1	13.89	20.08	24.00
2930.1	2900.1	13.26	17.46	18.20
3000.1	2970.1	15.40	16.82	17.49
3080.1	3050.1	14.59	16.36	17.35
3150.1	3120.1	12.42	16.09	17.59

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB)		
		@LO (dBm)		
		-6	-3	0
290.1	260.1	-11.45	0.80	1.40
360.1	330.1	2.62	2.37	1.80
430.1	400.1	3.24	2.23	1.50
500.1	470.1	1.61	1.67	1.45
570.1	540.1	0.60	0.64	0.59
640.1	610.1	0.92	0.84	0.75
710.1	680.1	0.48	0.41	0.38
780.1	750.1	0.92	0.82	0.68
850.1	820.1	0.18	0.32	0.39
920.1	890.1	0.54	0.39	0.32
990.1	960.1	0.54	0.41	0.41
1060.1	1030.1	0.34	0.28	0.22
1130.1	1100.1	0.53	0.38	0.34
1200.1	1170.1	0.51	0.34	0.22
1280.1	1250.1	0.11	0.26	0.26
1350.1	1320.1	0.89	0.92	0.86
1430.1	1400.1	1.83	1.76	1.65
1500.1	1470.1	2.19	1.87	1.66
1580.1	1550.1	1.51	1.22	0.98
1650.1	1620.1	1.08	0.67	0.50
1730.1	1700.1	0.60	0.29	0.15
1800.1	1770.1	1.31	0.90	0.60
1880.1	1850.1	1.63	1.08	0.69
1950.1	1920.1	1.84	1.96	1.80
2030.1	2000.1	1.08	1.32	1.20
2100.1	2070.1	0.96	1.03	0.94
2180.1	2150.1	0.78	0.80	0.74
2250.1	2220.1	0.69	0.63	0.53
2330.1	2300.1	0.84	0.54	0.36
2400.1	2370.1	1.13	0.79	0.48
2480.1	2450.1	1.84	1.52	1.33
2550.1	2520.1	0.86	1.21	1.06
2630.1	2600.1	-2.07	0.25	0.59
2700.1	2670.1	-1.35	0.03	0.41
2780.1	2750.1	-0.33	0.31	0.36
2850.1	2820.1	-0.31	0.44	0.59
2930.1	2900.1	-0.38	0.47	0.70
3000.1	2970.1	0.25	0.36	0.49
3080.1	3050.1	1.90	1.08	1.07
3150.1	3120.1	3.13	1.52	1.40

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1575.1MHz (dB)
		@LO (dBm)
		-3
635.0	940.1	13.05
594.7	980.4	9.88
554.4	1020.7	8.83
514.0	1061.1	7.98
473.7	1101.4	7.41
433.4	1141.7	7.63
393.1	1182.0	7.16
352.7	1222.4	6.53
312.4	1262.7	6.03
272.1	1303.0	5.58
231.8	1343.3	5.39
211.6	1363.5	5.30
171.3	1403.8	5.08
151.1	1424.0	5.13
110.8	1464.3	5.31
90.6	1484.5	5.36
50.3	1524.8	5.59
30.2	1544.9	5.57
10.0	1585.1	5.59
30.5	1605.6	5.36
71.5	1646.6	5.30
91.9	1667.0	5.41
132.9	1708.0	5.61
153.4	1728.5	5.79
194.4	1769.5	6.14
214.8	1789.9	6.30
255.8	1830.9	6.73
276.3	1851.4	6.93
317.3	1892.4	7.44
337.7	1912.8	7.81
378.7	1953.8	8.48
399.2	1974.3	8.64
440.2	2015.3	9.18
460.6	2035.7	9.58
501.6	2076.7	9.23
522.1	2097.2	8.93
563.1	2138.2	8.56
583.5	2158.6	8.59
624.5	2199.6	10.73
645.0	2220.1	13.24

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)
		@LO (dBm)
		-3
10.0	760.1	6.68
30.0	780.1	6.97
50.0	800.1	7.59
70.0	820.1	7.97
90.0	840.1	8.26
110.0	860.1	8.34
130.0	880.1	8.48
150.0	900.1	8.42
170.0	920.1	8.40
190.0	940.1	8.28
210.0	960.1	8.01
230.0	980.1	7.58
250.0	1000.1	7.38
260.0	1010.1	7.21
280.0	1030.1	7.09
290.0	1040.1	7.07
310.0	1060.1	7.05
320.0	1070.1	7.13
340.0	1090.1	6.91
350.0	1100.1	6.75
370.0	1120.1	6.61
380.0	1130.1	6.66
400.0	1150.1	6.69
410.0	1160.1	6.82
430.0	1180.1	7.15
440.0	1190.1	7.21
460.0	1210.1	7.52
470.0	1220.1	7.67
490.0	1240.1	7.99
500.0	1250.1	8.13
520.0	1270.1	8.31
530.0	1280.1	8.29
550.0	1300.1	8.47
560.0	1310.1	8.61
580.0	1330.1	8.89
590.0	1340.1	9.18
610.0	1360.1	9.92
620.0	1370.1	10.56
640.0	1390.1	12.95
650.0	1400.1	14.56

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2400.1001MHz (dB)
		@LO (dBm)
		-3
650.1	1750.0	14.38
630.1	1770.0	11.79
610.1	1790.0	10.29
590.1	1810.0	9.68
570.1	1830.0	9.57
550.1	1850.0	9.64
530.1	1870.0	9.69
510.1	1890.0	9.85
490.1	1910.0	10.02
470.1	1930.0	10.13
450.1	1950.0	10.10
430.1	1970.0	9.93
410.1	1990.0	9.84
400.1	2000.0	9.79
380.1	2020.0	9.74
370.1	2030.0	9.75
350.1	2050.0	9.66
340.1	2060.0	9.58
320.1	2080.0	9.47
310.1	2090.0	9.30
290.1	2110.0	9.16
280.1	2120.0	9.07
260.1	2140.0	8.81
250.1	2150.0	8.70
230.1	2170.0	8.46
220.1	2180.0	8.26
200.1	2200.0	7.98
190.1	2210.0	7.86
170.1	2230.0	7.60
160.1	2240.0	7.50
140.1	2260.0	7.31
130.1	2270.0	7.18
110.1	2290.0	7.00
100.1	2300.0	6.95
80.1	2320.0	6.81
70.1	2330.0	6.77
50.1	2350.0	6.83
40.1	2360.0	6.79
20.1	2380.0	6.89
10.1	2390.0	6.97

Frequency Mixer

MACA-242H+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	-6	-3	0	-6	-3	0
260.1	35.10	33.85	31.80	5.79	7.13	7.61
330.1	25.81	28.28	28.45	3.03	5.36	7.15
400.1	29.92	28.01	25.87	3.26	5.81	8.10
470.1	23.42	23.87	24.35	3.75	6.12	8.23
540.1	23.61	24.88	25.94	4.97	7.53	10.07
610.1	31.99	39.57	49.38	6.54	7.00	7.63
680.1	20.67	20.76	21.07	20.61	21.49	22.01
750.1	20.30	21.29	20.93	42.08	42.35	42.82
820.1	21.85	21.59	20.58	56.20	55.69	55.99
890.1	20.16	22.18	22.08	44.48	44.47	44.80
960.1	19.26	19.65	18.36	32.67	33.36	34.13
1030.1	21.45	22.94	20.56	39.98	41.59	43.09
1100.1	27.45	33.19	24.60	46.97	48.98	50.91
1170.1	23.73	39.27	26.36	52.00	54.05	56.21
1250.1	23.29	31.68	22.19	58.26	60.12	61.90
1320.1	19.60	22.48	23.84	75.60	79.77	82.53
1400.1	10.95	11.56	11.85	55.92	57.83	59.62
1470.1	14.73	16.30	17.40	47.28	50.43	53.45
1550.1	15.58	14.88	14.71	51.54	55.61	59.46
1620.1	13.52	13.22	13.40	51.46	55.98	60.21
1700.1	14.70	13.82	13.47	50.06	54.58	58.96
1770.1	16.50	16.88	17.72	51.90	55.14	59.12
1850.1	15.69	16.43	17.80	56.83	55.95	56.43
1920.1	15.39	15.62	16.15	63.84	59.88	57.37
2000.1	14.62	13.91	13.96	67.88	70.94	68.74
2070.1	13.79	13.46	12.68	67.68	73.61	78.26
2150.1	16.32	18.47	19.70	71.23	76.11	81.74
2220.1	14.17	14.85	15.27	70.09	74.38	80.33
2300.1	14.85	16.13	16.91	65.10	70.06	73.83
2370.1	14.95	17.26	18.52	62.44	65.49	68.43
2450.1	14.48	18.18	24.48	58.07	60.95	63.49
2520.1	13.02	20.20	23.84	54.94	59.88	63.64
2600.1	13.00	16.06	15.74	50.02	50.56	50.85
2670.1	12.11	10.00	8.48	48.43	47.42	47.07
2750.1	19.72	14.55	11.64	57.92	53.67	52.03
2820.1	20.91	17.43	14.06	62.27	56.52	54.65
2900.1	20.57	19.66	19.53	59.89	57.70	57.50
2970.1	21.96	20.26	20.06	56.99	57.46	58.47
3050.1	18.16	17.91	17.76	52.81	55.21	56.83
3120.1	16.20	17.85	18.10	50.98	54.05	56.07

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		-6	-3	0
290.1	260.1	25.45	23.97	22.14
360.1	330.1	20.89	19.53	18.22
430.1	400.1	19.92	17.39	15.88
500.1	470.1	17.25	16.76	16.55
570.1	540.1	21.33	21.14	21.42
640.1	610.1	29.52	29.47	31.60
710.1	680.1	48.28	46.98	44.53
780.1	750.1	65.71	65.04	63.38
850.1	820.1	67.31	67.53	67.84
920.1	890.1	66.65	68.14	68.97
990.1	960.1	67.73	68.18	70.04
1060.1	1030.1	70.51	71.06	69.98
1130.1	1100.1	70.20	70.98	71.04
1200.1	1170.1	72.07	71.50	72.70
1280.1	1250.1	75.16	76.16	76.41
1350.1	1320.1	84.01	84.24	87.71
1430.1	1400.1	77.97	77.36	76.82
1500.1	1470.1	74.30	75.07	78.37
1580.1	1550.1	83.03	90.00	83.21
1650.1	1620.1	87.40	86.89	81.22
1730.1	1700.1	79.76	79.73	81.98
1800.1	1770.1	77.14	76.89	76.93
1880.1	1850.1	72.56	71.11	70.38
1950.1	1920.1	71.07	69.00	68.82
2030.1	2000.1	69.79	69.47	68.57
2100.1	2070.1	68.02	66.98	67.88
2180.1	2150.1	65.74	66.00	65.51
2250.1	2220.1	66.10	66.20	66.13
2330.1	2300.1	64.68	66.01	66.73
2400.1	2370.1	65.70	66.88	67.05
2480.1	2450.1	64.69	66.13	66.00
2550.1	2520.1	64.41	64.44	64.49
2630.1	2600.1	62.72	64.55	65.84
2700.1	2670.1	70.45	67.76	67.81
2780.1	2750.1	67.21	65.26	63.82
2850.1	2820.1	63.60	62.20	61.38
2930.1	2900.1	60.39	59.92	59.35
3000.1	2970.1	57.90	57.92	57.73
3080.1	3050.1	56.24	56.31	56.34
3150.1	3120.1	55.18	55.15	54.93

Frequency Mixer

MACA-242H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2400.1001MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		-6	-3	0		-6	-3	0		-6	-3	0
290.1	260.1	7.22	3.87	3.14	260.1	5.65	5.61	5.63	10.0	1.53	1.10	1.07
360.1	330.1	2.20	1.79	1.77	330.1	5.27	5.30	5.36	30.0	1.53	1.10	1.08
430.1	400.1	1.99	1.71	1.66	400.1	4.18	4.33	4.40	50.0	1.56	1.12	1.05
500.1	470.1	3.58	3.02	2.73	470.1	3.98	3.93	3.88	70.0	1.56	1.13	1.06
570.1	540.1	4.77	4.43	4.26	540.1	3.73	3.57	3.44	90.0	1.61	1.17	1.04
640.1	610.1	3.92	3.82	3.79	610.1	3.29	3.17	3.05	110.0	1.61	1.17	1.06
710.1	680.1	3.16	2.82	2.62	680.1	2.93	2.89	2.82	130.0	1.64	1.21	1.09
780.1	750.1	4.00	3.65	3.38	750.1	2.57	2.60	2.57	150.0	1.67	1.23	1.09
850.1	820.1	6.05	5.51	5.10	820.1	2.40	2.44	2.42	170.0	1.75	1.30	1.14
920.1	890.1	4.32	4.10	3.90	890.1	2.28	2.32	2.33	190.0	1.81	1.35	1.19
990.1	960.1	3.03	2.84	2.71	960.1	2.20	2.23	2.25	210.0	1.87	1.42	1.25
1060.1	1030.1	3.06	3.03	2.99	1030.1	2.00	2.02	2.04	230.0	1.94	1.47	1.29
1130.1	1100.1	5.51	5.38	5.28	1100.1	2.10	2.06	2.05	250.0	2.04	1.57	1.37
1200.1	1170.1	5.59	5.23	5.04	1170.1	2.07	2.03	2.02	260.0	2.09	1.61	1.40
1280.1	1250.1	4.80	4.59	4.50	1250.1	2.02	2.00	2.03	280.0	2.16	1.68	1.48
1350.1	1320.1	4.05	3.86	3.80	1320.1	1.99	2.04	2.11	290.0	2.17	1.69	1.48
1430.1	1400.1	2.74	2.48	2.32	1400.1	2.07	2.20	2.33	310.0	2.24	1.74	1.51
1500.1	1470.1	2.16	1.95	1.79	1470.1	2.26	2.46	2.68	320.0	2.26	1.76	1.53
1580.1	1550.1	1.45	1.33	1.26	1550.1	2.44	2.60	2.79	340.0	2.35	1.84	1.59
1650.1	1620.1	1.19	1.22	1.25	1620.1	2.60	2.70	2.82	350.0	2.42	1.89	1.64
1730.1	1700.1	1.56	1.72	1.87	1700.1	2.84	2.77	2.80	370.0	2.49	1.95	1.69
1800.1	1770.1	1.47	1.57	1.62	1770.1	2.95	2.80	2.73	380.0	2.57	2.03	1.75
1880.1	1850.1	1.17	1.08	1.23	1850.1	2.92	2.75	2.66	400.0	2.67	2.10	1.82
1950.1	1920.1	1.89	1.55	1.37	1920.1	2.75	2.60	2.53	410.0	2.75	2.16	1.86
2030.1	2000.1	2.79	2.44	2.32	2000.1	2.52	2.38	2.33	430.0	2.88	2.28	1.97
2100.1	2070.1	2.87	2.59	2.53	2070.1	2.18	2.10	2.12	440.0	2.92	2.32	2.00
2180.1	2150.1	2.97	2.69	2.60	2150.1	1.71	1.74	1.86	460.0	3.06	2.45	2.13
2250.1	2220.1	3.06	2.82	2.73	2220.1	1.38	1.49	1.67	470.0	3.07	2.45	2.13
2330.1	2300.1	2.85	2.58	2.51	2300.1	1.20	1.33	1.52	490.0	3.11	2.51	2.19
2400.1	2370.1	2.69	2.22	2.04	2370.1	1.36	1.36	1.46	500.0	3.09	2.49	2.18
2480.1	2450.1	3.20	2.43	2.02	2450.1	1.63	1.58	1.57	520.0	2.92	2.37	2.10
2550.1	2520.1	4.28	3.57	3.31	2520.1	1.77	1.72	1.73	530.0	2.82	2.31	2.05
2630.1	2600.1	4.91	4.09	3.78	2600.1	1.55	1.46	1.45	550.0	2.41	2.01	1.81
2700.1	2670.1	4.86	4.03	3.69	2670.1	1.54	1.46	1.45	560.0	2.18	1.84	1.67
2780.1	2750.1	4.43	3.73	3.47	2750.1	1.25	1.24	1.26	580.0	1.59	1.36	1.28
2850.1	2820.1	4.15	3.42	3.06	2820.1	1.14	1.12	1.14	590.0	1.33	1.14	1.11
2930.1	2900.1	4.08	3.25	2.81	2900.1	1.22	1.18	1.13	610.0	1.50	1.44	1.43
3000.1	2970.1	3.90	3.26	2.85	2970.1	1.37	1.32	1.25	620.0	1.97	1.87	1.82
3080.1	3050.1	3.77	3.28	2.86	3050.1	1.55	1.48	1.39	640.0	3.49	3.24	3.09
3150.1	3120.1	3.98	3.82	3.52	3120.1	1.61	1.57	1.47	650.0	4.45	4.13	3.94

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	45	59	23	34	37	35	42	73	36	55
1	-	79	+0	77	65	66	40	66	40	64	60	52
2	67	>79	>79	48	>79	>79	64	68	68	74	70	>79
3	>90	>79	>79	>79	54	>79	>79	>79	78	>79	74	>79
4	>90	>79	>79	>79	>79	76	>79	>79	>79	>79	>79	>79
5	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 1575.1 MHz; -5.00 dBm.
LO IN: 1545.1 MHz; +3.00 dBm
IF OUT: 30 MHz; -10.5 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	57	70	35	47	54	47	56	77	51	66
1	-	79	+0	76	66	68	42	67	42	71	65	59
2	47	>89	86	37	75	>89	55	61	63	68	73	>89
3	87	84	>89	>89	33	>89	>89	80	63	83	64	84
4	>90	76	79	>89	>89	58	>89	>89	73	78	78	>89
5	>90	83	78	>89	>89	>89	52	>89	>89	>89	77	>89
6	>90	85	84	>89	>89	>89	>89	77	>89	>89	>89	>89
7	>90	>89	84	>89	88	>89	>89	>89	68	>89	>89	>89
8	>90	>89	>89	>89	>89	>89	>89	>89	>89	76	>89	>89
9	>90	>89	>89	>89	>89	>89	>89	>89	>89	>89	79	>89
10	>90	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	80
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER


Test conditions:

RF IN: 1575.1 MHz; 5.00 dBm.
LO IN: 1545.1 MHz; +3.00 dBm
IF OUT: 30 MHz; -0.78 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves


Conversion Loss @ IF=30MHz

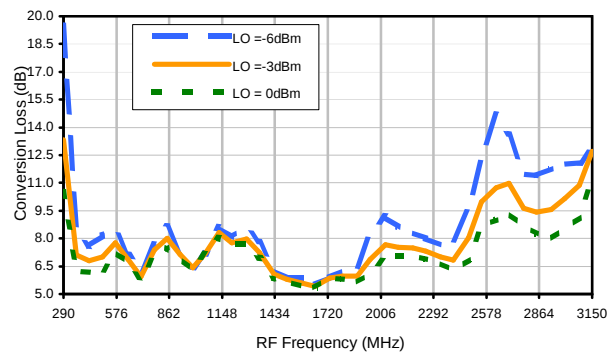


Conversion Loss vs. LO @ RF=1575.1MHz

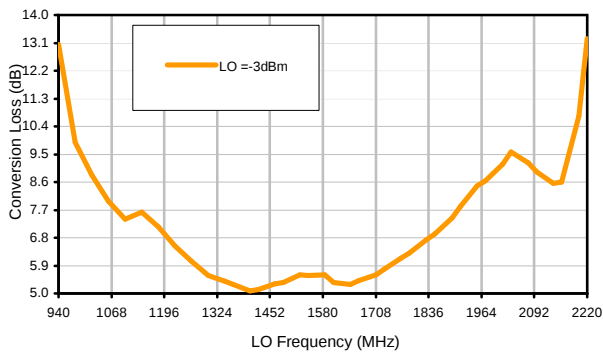


Conversion Loss vs. IF @ RF=1575.1MHz

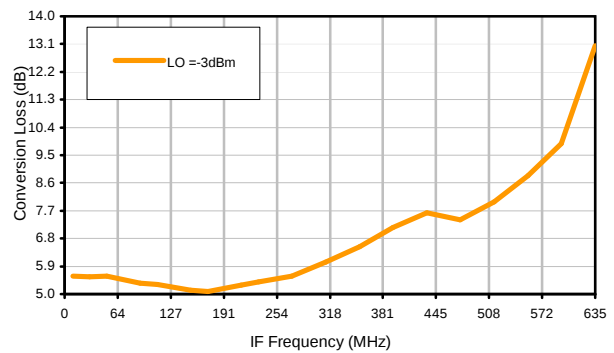


Conversion Loss vs. IF @ RF=750.1MHz

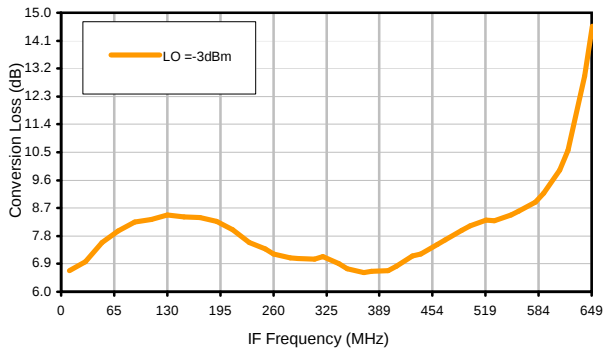


Conversion Loss vs. IF @ RF=2400.1001MHz

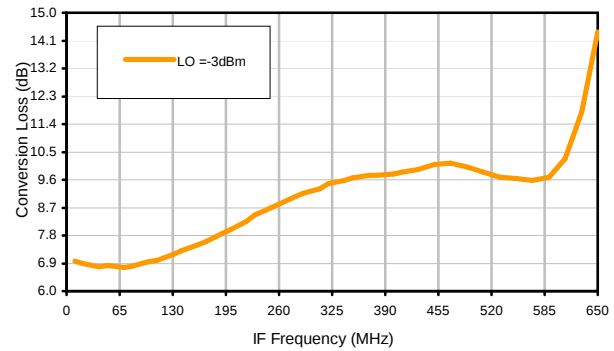

IP3 Input

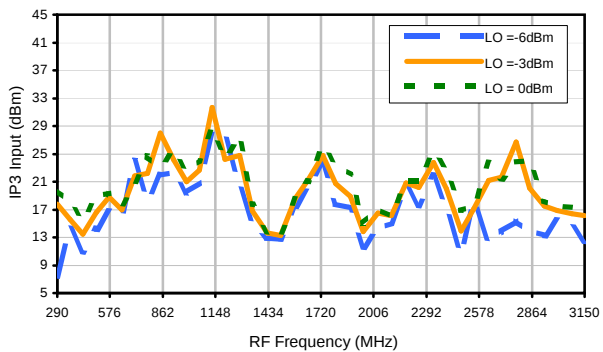


Compression @ RF IN=+10dBm

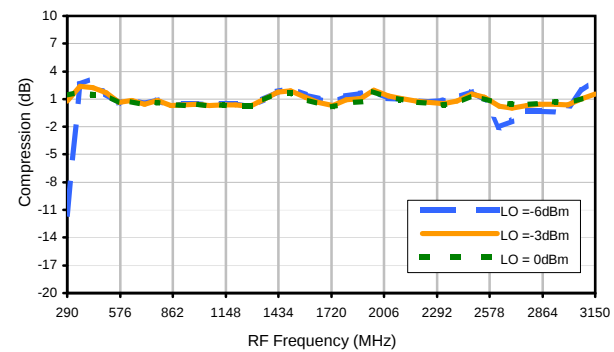


Typical Performance Curves


LO-RF Isolation

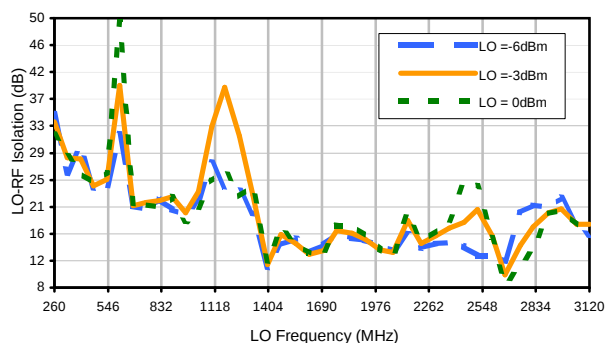


LO-IF Isolation

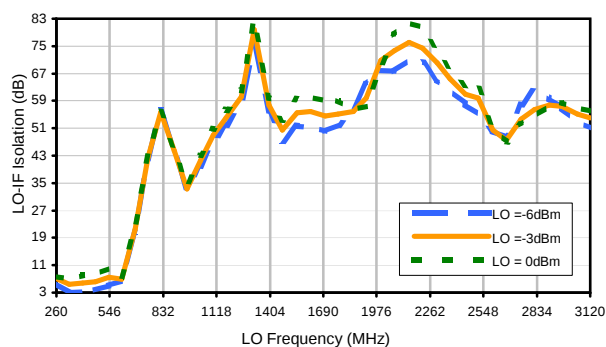


RF-IF Isolation

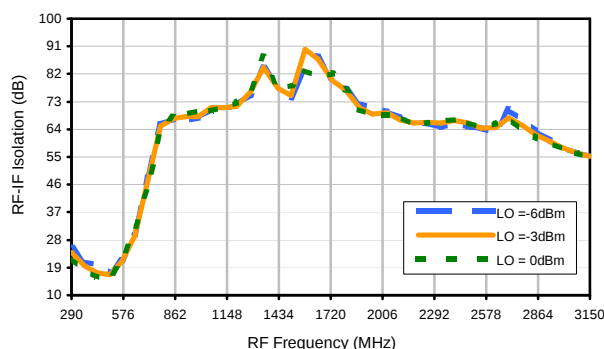


RF VSWR

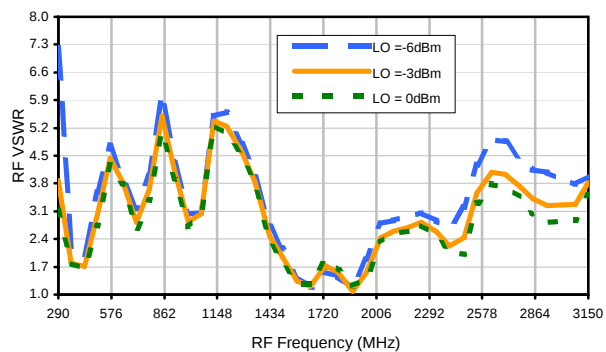

LO VSWR

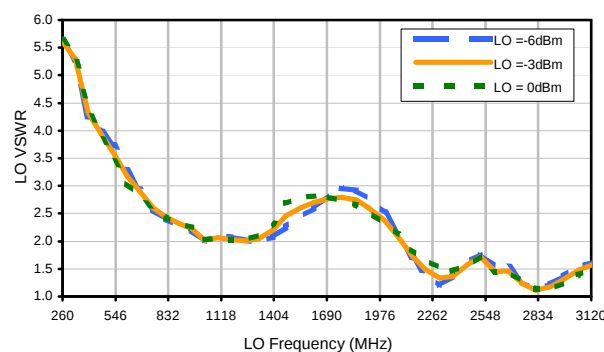

IF VSWR

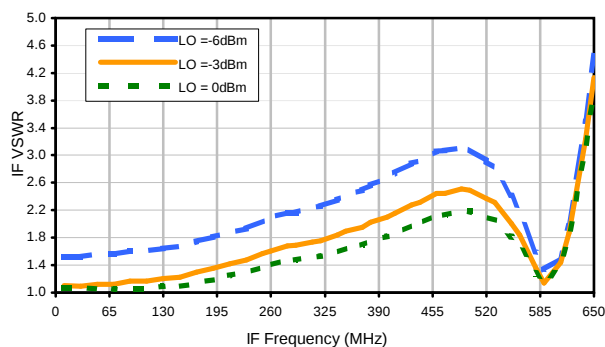

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	45	59	23	34	37	35	42	73	36	55
1	-	79	+0	77	65	66	40	66	40	64	60	52
2	67	>79	>79	48	>79	>79	64	68	68	74	70	>79
3	>90	>79	>79	>79	54	>79	>79	>79	78	>79	74	>79
4	>90	>79	>79	>79	>79	76	>79	>79	>79	>79	>79	>79
5	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
6	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
7	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
8	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
9	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
10	>90	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 1575.1 MHz; -5.00 dBm.
LO IN: 1545.1 MHz; +3.00 dBm
IF OUT: 30 MHz; -10.5 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	57	70	35	47	54	47	56	77	51	66
1	-	79	+0	76	66	68	42	67	42	71	65	59
2	47	>89	86	37	75	>89	55	61	63	68	73	>89
3	87	84	>89	>89	33	>89	>89	80	63	83	64	84
4	>90	76	79	>89	>89	58	>89	>89	73	78	78	>89
5	>90	83	78	>89	>89	>89	52	>89	>89	>89	77	>89
6	>90	85	84	>89	>89	>89	>89	77	>89	>89	>89	>89
7	>90	>89	84	>89	88	>89	>89	>89	68	>89	>89	>89
8	>90	>89	>89	>89	>89	>89	>89	>89	>89	76	>89	>89
9	>90	>89	>89	>89	>89	>89	>89	>89	>89	>89	79	>89
10	>90	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


LO HARMONICS ORDER

Test conditions: RF IN: 1575.1 MHz; 5.00 dBm.
LO IN: 1545.1 MHz; +3.00 dBm
IF OUT: 30 MHz; -0.78 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

DZ885
DZ1034

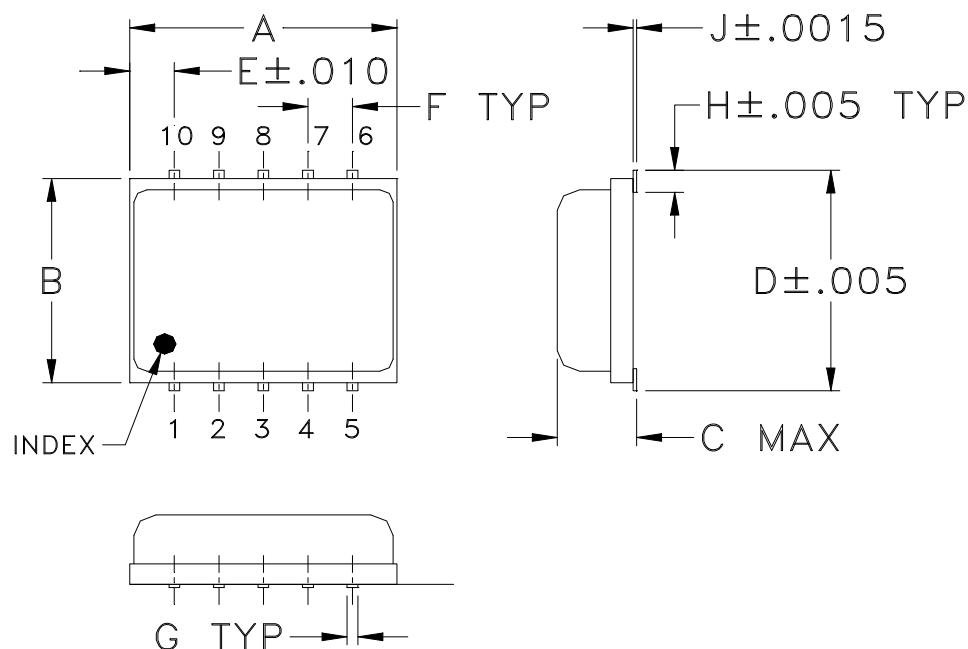

PCB Land Pattern

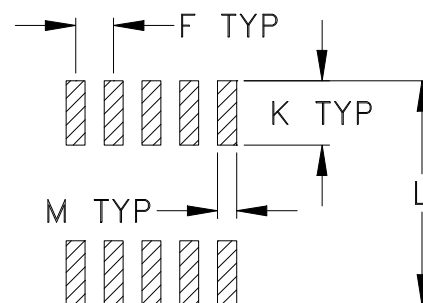

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT. GRAMS
DZ885	.30 (7.62)	.250 (6.35)	.085 (2.16)	.266 (6.76)	.050 (1.27)	.050 (1.27)	.012 (0.30)	.029 (0.74)	.004 (0.10)	.085 (2.16)	.296 (7.52)	.030 (0.76)	0.25
DZ1034			.105 (2.67)										0.3

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic encapsulation on Ceramic base.
- Termination finish:
 - For RoHS Case Styles: Tin plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

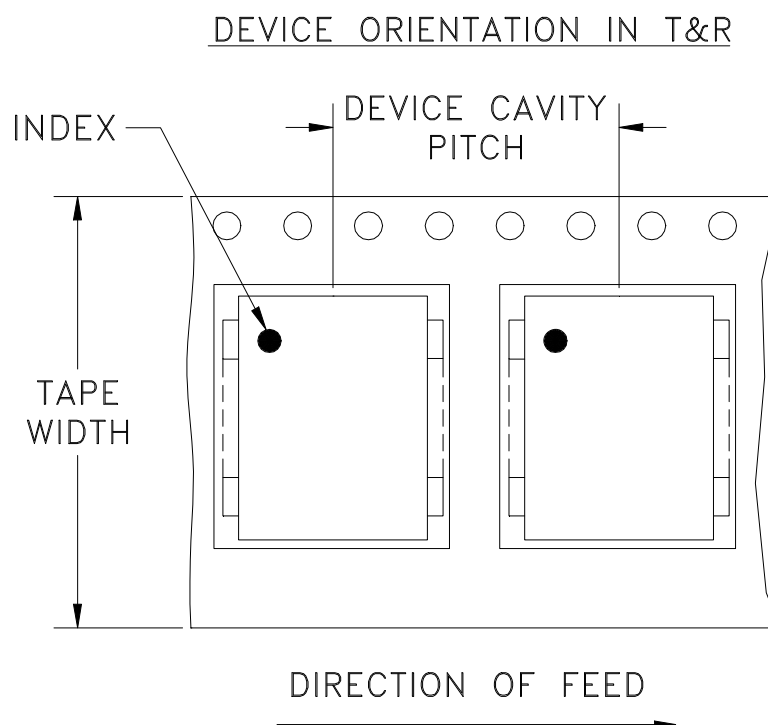

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M89275	NEW RELEASE	10/23/03	AV	DJ
A	M91639	REMOVED NOTE 2	04/14/04	AV	DJ
B	M102713	ADDED "...WITH SMOBC"	01/12/06	GF	IL
C	M115195	MODIFIED PATTERN & TEST BOARD	12/24/07	AV	DJ

SUGGESTED MOUNTING CONFIGURATION FOR DZ1034 CASE STYLE, "10MA01" PIN CODE

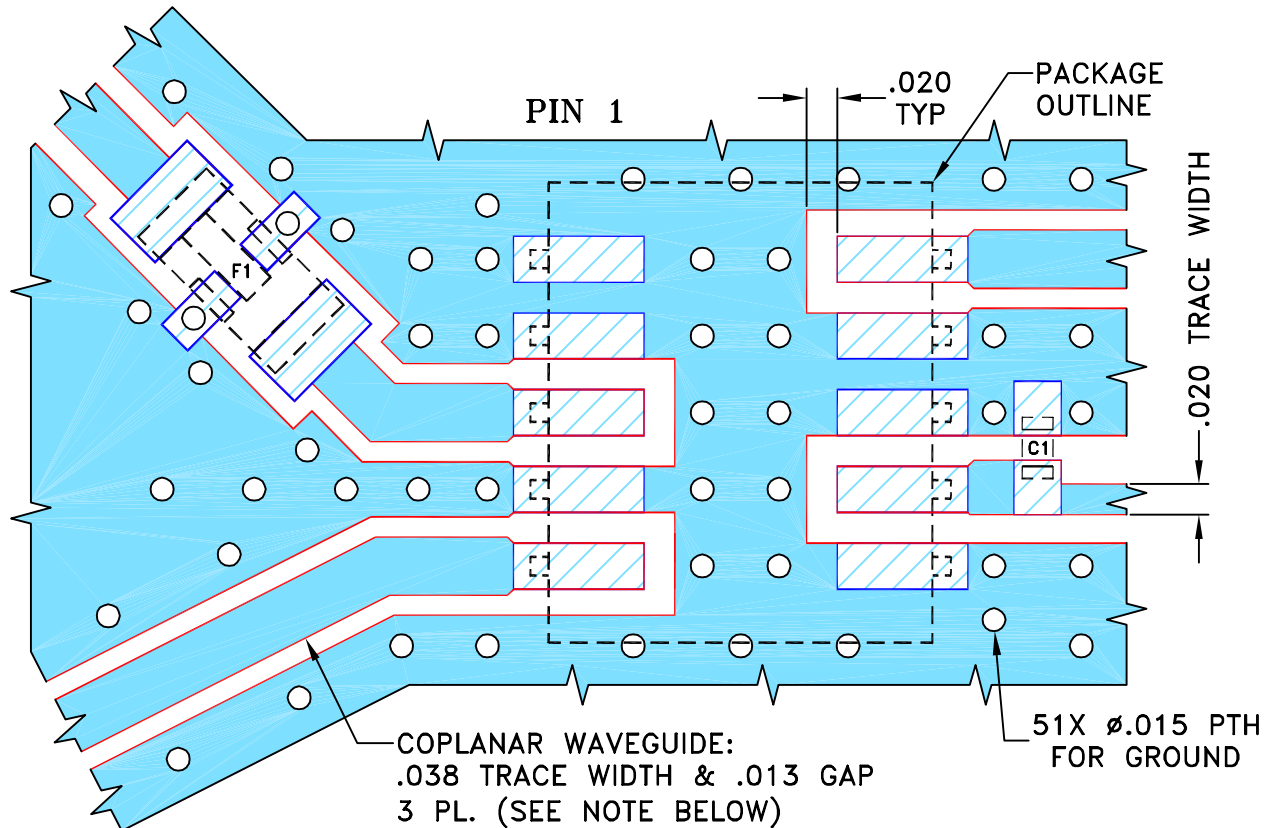

CAPACITOR C1: 1000 pF, 0402 SIZE

FILTER F1: LFCN-490+, FV1206 CASE STYLE

- NOTE: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020'' \pm 0.0015''$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

10/10/03

TOLERANCES ON:

CHECKED

IL

10/23/03

2 PL DECIMALS $\pm$

APPROVED

DJ

10/23/03

3 PL DECIMALS $\pm$ ANGLES $\pm$ FRACTIONS $\pm$
 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VEEDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, 10MA01, DZ1034, MACA-242H+, TB-403

SIZE

CODE IDENT

DRAWING NO:

REV:

A

15542

98-PL-145

C

FILE: 98PL145



SCALE:

8:1

SHEET:

1 OF 1


Evaluation Board and Circuit

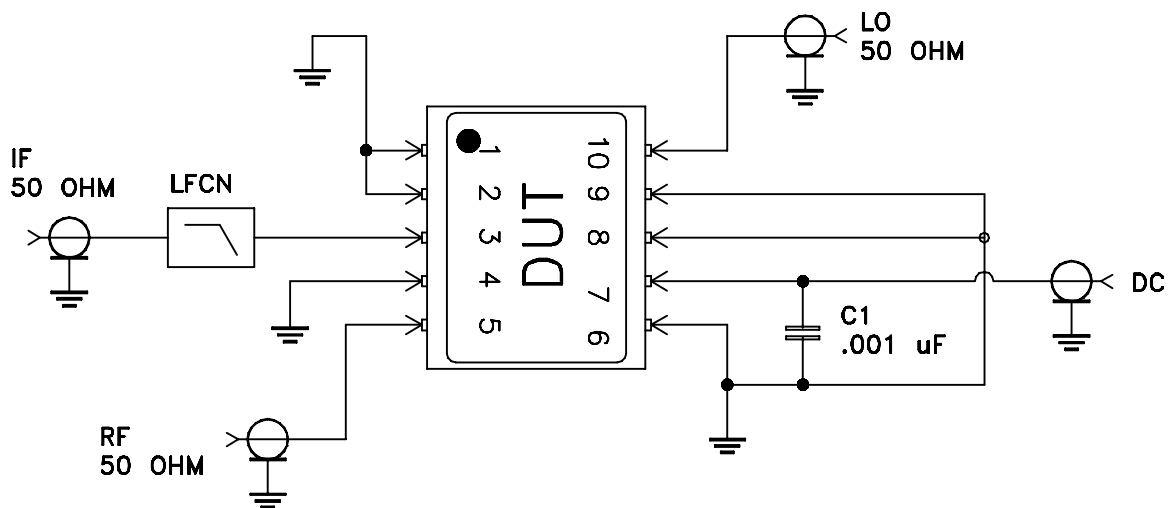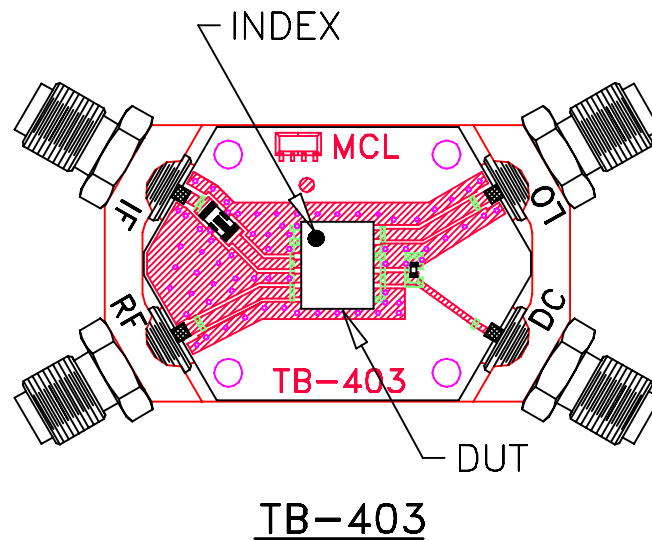

SCHEMATIC DIAGRAM

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process: 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215