

Plug-In

Low Noise Amplifier

MAN-1LN

50Ω

0.5 to 500 MHz

Features

- low noise, 3.0 dB typ.
- hermetic case
- protected by US Patent, 6,943,629

Applications

- VHF/UHF
- military, hi-rel applications



Generic photo used for illustration purposes only

CASE STYLE: A05

Low Noise Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		NOISE FIGURE (dB)	GAIN (dB)			MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (:1) Typ.		DC POWER	
	f _L	f _U		Flatness Max.	Min.	Total Range	Output (1 dB Compr.)	Input (no damage)		In	Out	Volt (V) Nom.	Current (mA) Max.
MAN-1LN	0.5	500	3.0		28	±0.5 ±1.4	+7*	+15	+18	1.8	1.8	12	60

m = mid range [2 f_L to f_U/2]

Open load is not recommended, potentially can cause damage.

With no load derate max input power by 20 dB

* Below 5 MHz, 1 dB compression point decreases to 6.5 dBm.

Pin Connections


RF IN	1
RF OUT	8
DC	5
GROUND	2,3,4,6
CASE GROUND	2,3,4,6
NOT USED	7

Maximum Ratings

Operating Temperature	-54°C to 85°C
Storage Temperature	-55°C to 100°C
DC Voltage	+12.5V Max.

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

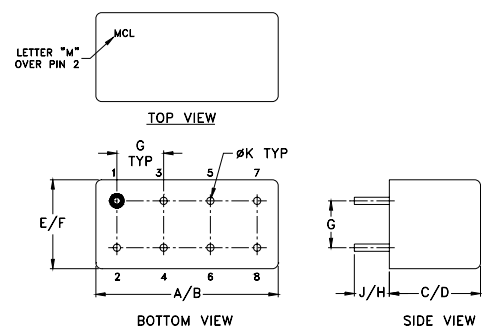

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.770	.800	.240	.250	.370	.400	.200	.20	.14	.031	grams
19.558	20.32	6.096	6.35	9.398	10.16	5.08	5.08	3.556	0.7874	3.7

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp








www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
MAN-1LN
200408
Page 1 of 2

Typical Performance Data/Curves

MAN-1LN

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	P _{OUT} at 1 dB COMPR. (dBm)
	11V	12V	12.5V	11V	12V	12.5V	IN	OUT		
0.50	29.88	31.30	31.73	13.20	12.90	12.60	1.35	1.67	—	8.01
1.90	30.44	31.89	32.32	12.50	12.10	11.60	1.13	1.18	—	8.42
11.40	30.58	32.02	32.45	12.50	11.70	11.40	1.04	1.05	2.82	8.32
68.30	30.71	32.13	32.54	12.70	11.50	11.50	1.07	1.05	2.91	8.54
192.60	30.89	32.27	32.66	12.20	11.00	11.10	1.18	1.12	2.81	8.47
243.80	30.93	32.30	32.69	11.60	10.40	10.90	1.24	1.15	2.84	8.45
307.90	30.94	32.29	32.68	11.30	10.40	10.30	1.31	1.23	2.88	8.50
371.90	30.90	32.20	32.58	11.10	9.90	10.30	1.39	1.30	2.95	8.45
436.00	30.82	32.07	32.42	10.40	10.20	9.80	1.45	1.31	3.01	8.49
500.00	30.63	31.80	32.12	9.30	7.80	7.30	1.50	1.46	3.08	8.52

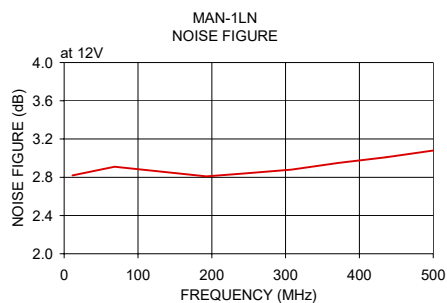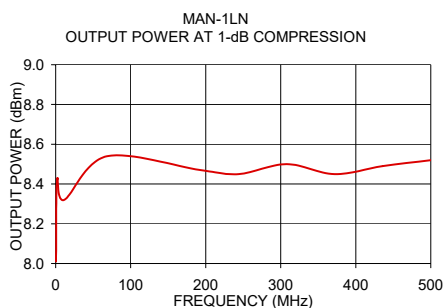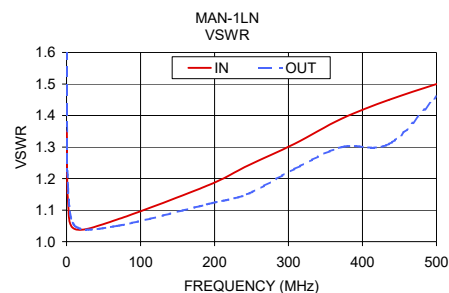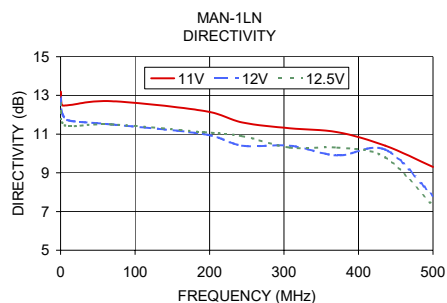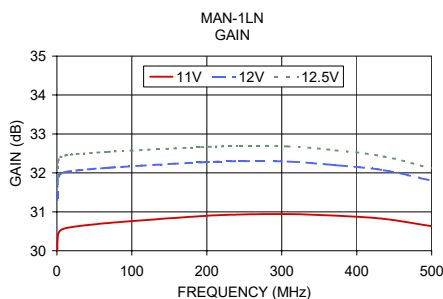

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Low Noise Amplifier

MAN-1LN

Typical Performance Data

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR IN (:1) 12V	VSWR OUT (:1) 12V	NOISE FIGURE (dB) 12V	Pout at 1dB Comp. (dBm) 12V
	11V	12V	12.5V	11V	12V	12.5V				
0.5	29.88	31.30	31.73	13.20	12.90	12.60	1.35	1.67		8.01
1.9	30.44	31.89	32.32	12.50	12.10	11.60	1.13	1.18		8.42
11.4	30.58	32.02	32.45	12.50	11.70	11.40	1.04	1.05	2.82	8.32
68.3	30.71	32.13	32.54	12.70	11.50	11.50	1.07	1.05	2.91	8.54
192.6	30.89	32.27	32.66	12.20	11.00	11.10	1.18	1.12	2.81	8.47
243.8	30.93	32.30	32.69	11.60	10.40	10.90	1.24	1.15	2.84	8.45
307.9	30.94	32.29	32.68	11.30	10.40	10.30	1.31	1.23	2.88	8.50
371.9	30.90	32.20	32.58	11.10	9.90	10.30	1.39	1.30	2.95	8.45
436.0	30.82	32.07	32.42	10.40	10.20	9.80	1.45	1.31	3.01	8.49
500.0	30.63	31.80	32.12	9.30	7.80	7.30	1.50	1.46	3.08	8.52

REV. X1

MAN-1LN

060913

Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Low Noise Amplifier

Typical Performance Curves

MAN-1LN

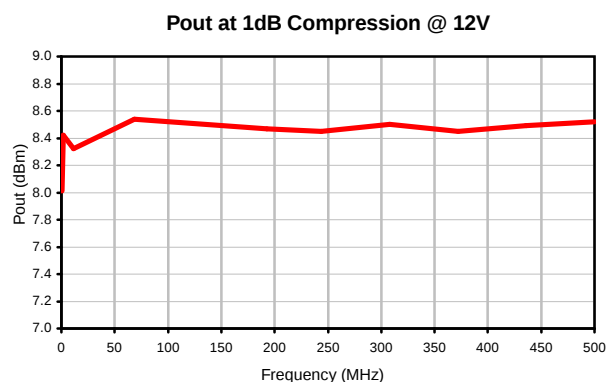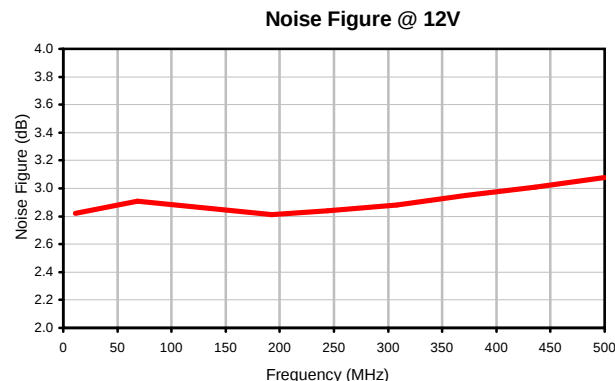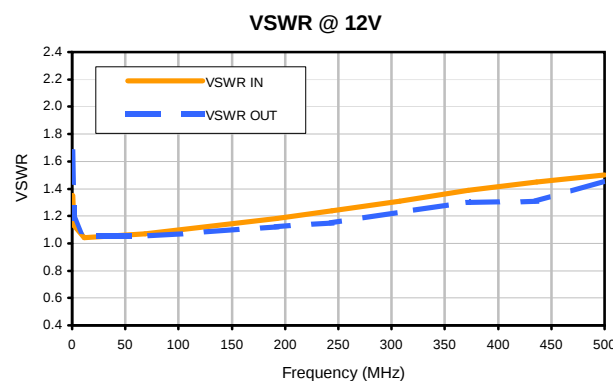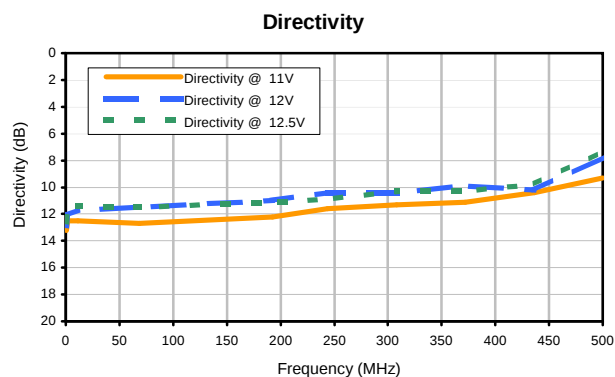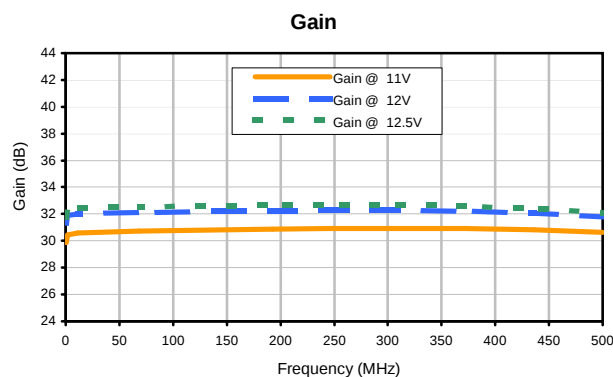

A01
A04
A05
A06

Outline Dimensions



CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D