

Frequency Mixer

MBA-10L

Level 3 (LO Power +3 dBm) 800 to 1000 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

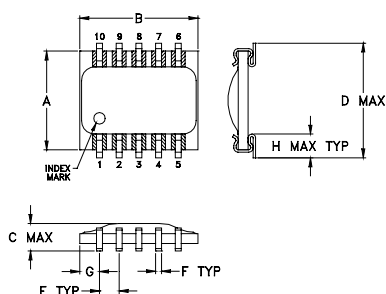

PCB Land Pattern




Suggested Layout,
Tolerance to be within ± 0.02
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	
.250	.300	.095	.290	.050	.015	.050	.060	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52	
J	K	L	M	N	P	Q	R	wt
.030	.080	.300	.100	.020	.015	.070	.014	grams
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-99

Suggested PCB Layout (PL-066)

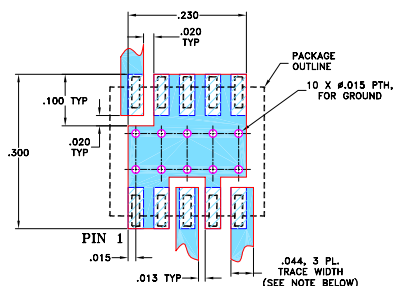

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent temperature stability
- excellent performance repeatability
- leads with strain relief
- very low cost
- ultra low height, 0.07"
- aqueous washable
- protected by US Patent 5,534,830

Applications

- cellular
- GSM
- WLAN
- PCMCIA

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
800-1000	DC-200	8.0	0.1	9.5	20	13	15	8	9

1 dB COMP.: 0 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +3dBm	LO +3dBm	LO +3dBm	LO +3dBm	LO +3dBm
800.00	830.00	8.13	23.10	18.30	2.84	1.68
810.00	840.00	8.14	22.40	17.60	2.72	1.68
820.00	850.00	8.06	21.70	17.30	2.65	1.62
830.00	860.00	8.01	21.00	16.50	2.43	1.54
840.00	870.00	7.90	20.50	16.10	2.43	1.52
850.00	880.00	8.05	20.00	15.60	2.30	1.46
860.00	890.00	7.96	19.50	15.50	2.18	1.42
870.00	900.00	7.84	19.10	15.10	2.12	1.30
880.00	910.00	8.04	18.80	14.50	1.99	1.28
890.00	920.00	7.92	18.40	14.20	1.94	1.23
900.00	930.00	7.98	18.10	13.80	1.81	1.15
910.00	940.00	7.89	17.70	13.70	1.73	1.35
920.00	950.00	7.74	17.60	13.20	1.66	1.29
930.00	960.00	7.89	17.20	13.00	1.57	1.40
940.00	970.00	7.74	16.90	12.60	1.52	1.34
950.00	980.00	7.70	16.70	12.20	1.42	1.42
970.00	1000.00	7.67	16.20	11.80	1.31	1.43
980.00	1010.00	7.80	16.10	11.60	1.24	1.41
990.00	1020.00	7.75	16.10	11.30	1.19	1.44
1000.00	1030.00	7.80	16.00	10.90	1.15	1.50

Electrical Schematic

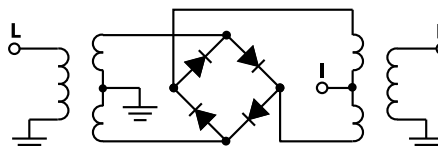







Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. E
M127419
MBA-10L
EE-7756/1
100512
Page 1 of 2

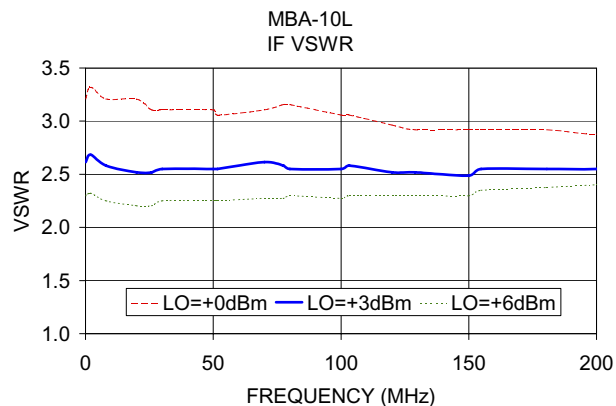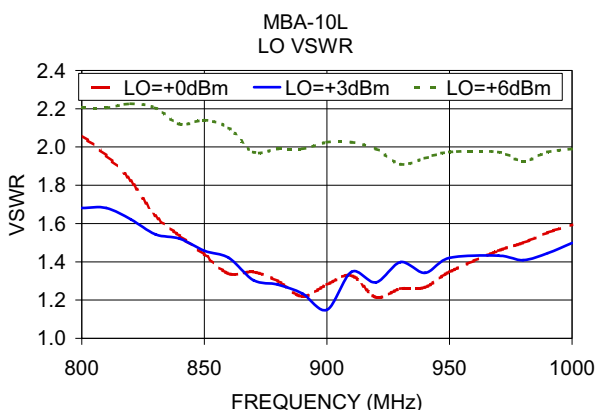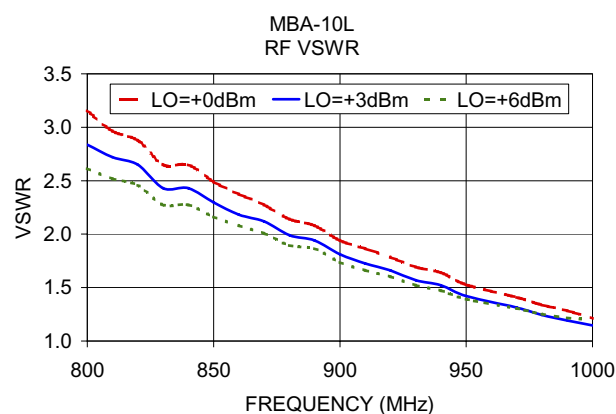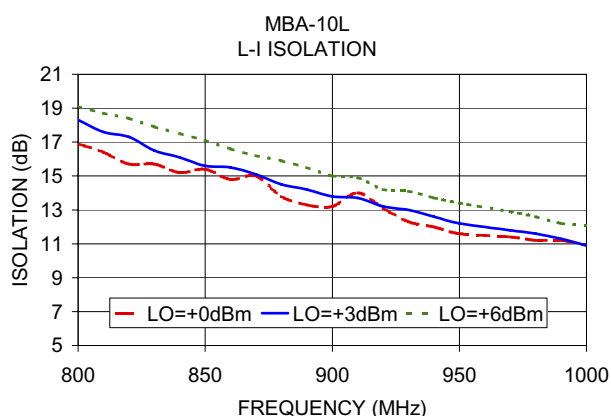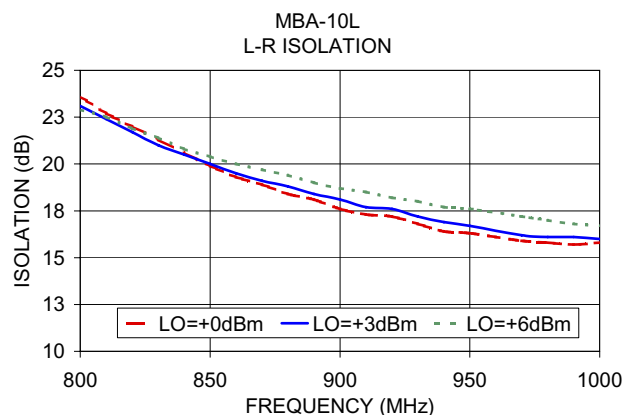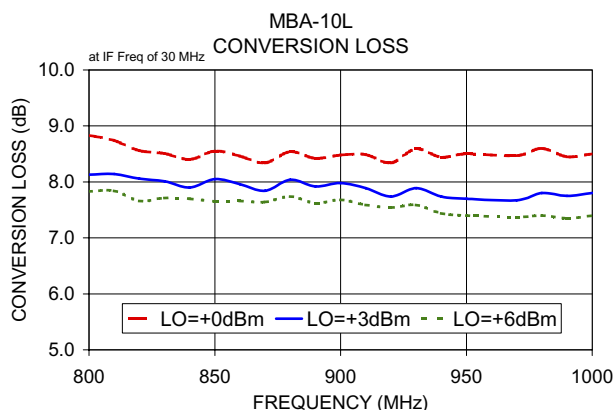

Frequency Mixer

MBA-10L

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=0dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		0	+3	+6			0	+3	+6			0	+3	+6
680.0	710.0	13.26	10.37	9.34	680.0	710.0	8.08	11.40	11.23	680.0	710.0	-0.83	-0.01	-0.06
700.0	730.0	12.02	9.80	8.82	700.0	730.0	10.22	10.84	11.29	700.0	730.0	-0.31	0.07	0.05
720.0	750.0	11.13	9.49	8.56	720.0	750.0	10.81	9.88	10.69	720.0	750.0	-0.11	0.08	0.12
740.0	770.0	10.39	9.19	8.38	740.0	770.0	13.61	10.68	10.09	740.0	770.0	0.10	0.08	0.13
760.0	790.0	9.98	8.97	8.28	760.0	790.0	12.77	12.35	10.02	760.0	790.0	0.11	0.01	0.05
780.0	810.0	9.65	8.73	8.13	780.0	810.0	12.84	12.13	9.99	780.0	810.0	0.12	-0.05	-0.03
800.0	830.0	9.45	8.65	8.17	800.0	830.0	11.38	10.72	9.87	800.0	830.0	0.15	-0.03	-0.06
820.0	850.0	9.21	8.46	7.99	820.0	850.0	13.03	10.74	9.89	820.0	850.0	0.18	-0.02	-0.05
840.0	870.0	9.29	8.56	8.12	840.0	870.0	10.70	9.88	9.47	840.0	870.0	0.06	-0.14	-0.13
860.0	890.0	9.25	8.52	8.08	860.0	890.0	8.69	8.09	8.54	860.0	890.0	0.01	-0.12	-0.12
880.0	910.0	9.20	8.44	8.03	880.0	910.0	7.00	7.72	8.85	880.0	910.0	0.11	-0.04	-0.07
900.0	930.0	9.23	8.43	8.01	900.0	930.0	6.09	7.36	9.59	900.0	930.0	0.03	-0.08	-0.10
920.0	950.0	9.48	8.55	8.11	920.0	950.0	4.78	7.15	9.68	920.0	950.0	-0.04	-0.07	-0.06
940.0	970.0	9.51	8.45	7.97	940.0	970.0	3.99	7.46	11.61	940.0	970.0	-0.01	0.03	0.08
960.0	990.0	9.46	8.36	7.87	960.0	990.0	3.96	10.23	14.23	960.0	990.0	0.12	0.16	0.22
980.0	1010.0	9.55	8.56	8.07	980.0	1010.0	4.40	12.14	11.15	980.0	1010.0	0.09	0.08	0.15
1000.0	1030.0	9.75	8.73	8.21	1000.0	1030.0	4.06	11.23	11.65	1000.0	1030.0	0.19	0.09	0.15
1020.0	1050.0	9.63	8.71	8.22	1020.0	1050.0	5.49	9.48	9.91	1020.0	1050.0	0.28	0.11	0.15
1040.0	1070.0	9.81	8.91	8.38	1040.0	1070.0	6.05	9.65	10.52	1040.0	1070.0	0.42	0.12	0.17
1060.0	1090.0	9.61	8.84	8.38	1060.0	1090.0	7.01	9.44	12.73	1060.0	1090.0	0.63	0.19	0.20
1080.0	1110.0	9.76	8.91	8.50	1080.0	1110.0	7.43	8.82	17.58	1080.0	1110.0	0.86	0.29	0.23
1100.0	1130.0	9.59	8.72	8.39	1100.0	1130.0	11.64	6.79	10.00	1100.0	1130.0	0.92	0.42	0.34
1120.0	1150.0	9.70	8.74	8.42	1120.0	1150.0	8.18	5.43	6.96	1120.0	1150.0	1.04	0.55	0.47
1140.0	1170.0	9.65	8.63	8.37	1140.0	1170.0	6.85	5.50	6.94	1140.0	1170.0	1.00	0.58	0.45
1160.0	1190.0	9.54	8.50	8.25	1160.0	1190.0	4.77	5.07	6.56	1160.0	1190.0	1.26	0.72	0.52
1180.0	1210.0	9.59	8.47	8.17	1180.0	1210.0	3.88	4.82	6.27	1180.0	1210.0	1.26	0.73	0.49
1200.0	1230.0	9.66	8.56	8.24	1200.0	1230.0	3.25	4.58	6.39	1200.0	1230.0	1.29	0.72	0.45
1220.0	1250.0	9.72	8.59	8.19	1220.0	1250.0	3.54	4.92	7.06	1220.0	1250.0	1.16	0.69	0.43
1240.0	1270.0	9.85	8.64	8.22	1240.0	1270.0	3.49	4.78	7.17	1240.0	1270.0	1.12	0.71	0.43
1260.0	1290.0	10.15	8.73	8.15	1260.0	1290.0	4.70	5.56	8.00	1260.0	1290.0	0.97	0.65	0.40
1280.0	1310.0	10.45	8.91	8.24	1280.0	1310.0	5.19	6.46	9.41	1280.0	1310.0	0.86	0.62	0.37
1300.0	1330.0	10.53	8.98	8.25	1300.0	1330.0	6.77	7.34	10.01	1300.0	1330.0	0.70	0.54	0.37
1320.0	1350.0	10.73	9.21	8.45	1320.0	1350.0	8.76	8.40	11.88	1320.0	1350.0	0.60	0.46	0.30
1330.0	1360.0	10.72	9.22	8.53	1330.0	1360.0	9.45	9.39	12.76	1330.0	1360.0	0.51	0.40	0.27
1350.0	1380.0	11.03	9.32	8.63	1350.0	1380.0	10.52	11.19	14.29	1350.0	1380.0	0.46	0.39	0.26
1360.0	1390.0	11.18	9.38	8.70	1360.0	1390.0	10.22	11.92	14.84	1360.0	1390.0	0.38	0.37	0.23
1380.0	1410.0	11.72	9.66	9.01	1380.0	1410.0	7.12	10.35	14.89	1380.0	1410.0	0.01	0.25	0.22
1390.0	1420.0	11.81	9.72	9.15	1390.0	1420.0	7.48	10.52	14.73	1390.0	1420.0	-0.07	0.21	0.18
1410.0	1440.0	12.01	9.97	9.43	1410.0	1440.0	7.58	10.46	14.50	1410.0	1440.0	-0.12	0.10	0.15
1420.0	1450.0	12.12	10.12	9.63	1420.0	1450.0	8.63	10.64	14.32	1420.0	1450.0	-0.14	0.09	0.13

REV. X3

MBA-10L

101012

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=900MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=789.9MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1010.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+3			+3			+3
320.0	580.0	10.80	10.1	800.0	9.00	430.1	580.0	10.41
306.2	593.8	9.51	20.1	810.0	8.53	420.1	590.0	9.50
292.4	607.6	8.92	30.1	820.0	8.45	410.1	600.0	8.88
278.7	621.3	8.44	40.1	830.0	8.80	400.1	610.0	8.63
264.9	635.1	8.32	50.1	840.0	8.97	390.1	620.0	8.39
251.1	648.9	8.00	55.1	845.0	8.81	380.1	630.0	8.16
237.3	662.7	7.67	65.1	855.0	8.83	370.1	640.0	8.04
223.6	676.4	7.41	70.1	860.0	8.80	360.1	650.0	7.99
209.8	690.2	7.22	80.1	870.0	9.02	350.1	660.0	7.85
196.0	704.0	6.95	85.1	875.0	8.97	340.1	670.0	7.67
182.2	717.8	7.03	95.1	885.0	9.00	330.1	680.0	7.71
168.4	731.6	6.94	100.1	890.0	8.88	320.1	690.0	7.74
154.7	745.3	6.87	110.1	900.0	9.12	310.1	700.0	7.64
134.0	766.0	6.99	115.1	905.0	9.07	300.1	710.0	7.52
120.2	779.8	6.92	125.1	915.0	9.32	290.1	720.0	7.58
99.6	800.4	7.32	130.1	920.0	9.23	280.1	730.0	7.53
85.8	814.2	7.33	140.1	930.0	9.27	270.1	740.0	7.36
65.1	834.9	7.68	145.1	935.0	9.24	260.1	750.0	7.26
51.3	848.7	7.76	155.1	945.0	9.41	250.1	760.0	7.28
30.7	869.3	8.07	160.1	950.0	9.40	240.1	770.0	7.24
16.9	883.1	8.33	170.1	960.0	9.31	230.1	780.0	7.14
22.8	922.8	8.62	175.1	965.0	9.30	220.1	790.0	7.05
48.5	948.5	8.55	185.1	975.0	9.31	210.1	800.0	7.13
87.0	987.0	8.50	190.1	980.0	9.42	200.1	810.0	7.21
112.6	1012.6	8.58	200.1	990.0	9.47	190.1	820.0	7.10
151.1	1051.1	8.86	205.1	995.0	9.53	180.1	830.0	7.14
176.7	1076.7	8.98	215.1	1005.0	9.39	170.1	840.0	7.34
215.2	1115.2	9.05	220.1	1010.0	9.46	160.1	850.0	7.46
240.9	1140.9	8.96	230.1	1020.0	9.57	150.1	860.0	7.50
279.3	1179.3	8.83	235.1	1025.0	9.70	140.1	870.0	7.70
305.0	1205.0	8.77	245.1	1035.0	9.68	130.1	880.0	7.82
343.5	1243.5	8.70	250.1	1040.0	9.74	120.1	890.0	7.85
369.1	1269.1	8.82	260.1	1050.0	9.68	110.1	900.0	7.93
407.6	1307.6	9.04	265.1	1055.0	9.79	100.1	910.0	8.09
433.3	1333.3	8.95	275.1	1065.0	9.84	80.1	930.0	8.08
471.7	1371.7	9.22	280.1	1070.0	9.93	70.1	940.0	8.22
497.4	1397.4	9.42	290.1	1080.0	9.94	50.1	960.0	8.44
535.9	1435.9	9.32	295.1	1085.0	9.90	40.1	970.0	8.42
561.5	1461.5	9.52	305.1	1095.0	9.91	20.1	990.0	8.76
600.0	1500.0	10.28	310.1	1100.0	10.02	10.1	1000.0	9.16

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	0	+3	+6	0	+3	+6
710.0	26.37	26.99	26.34	21.16	21.14	21.68
730.0	27.16	27.27	26.10	19.89	20.26	20.85
750.0	27.98	27.09	25.60	18.71	19.40	20.14
770.0	27.71	26.41	25.08	17.77	18.68	19.65
790.0	26.60	25.38	24.47	16.68	17.67	18.94
810.0	24.97	24.04	23.75	15.63	16.67	18.12
830.0	23.22	22.55	22.64	14.80	15.90	17.40
850.0	21.51	21.20	21.54	13.98	15.07	16.57
870.0	20.04	20.07	20.62	13.30	14.42	15.96
890.0	18.90	19.12	19.78	12.82	13.89	15.42
910.0	18.09	18.38	19.14	12.32	13.31	14.78
930.0	17.46	17.93	18.73	11.87	12.84	14.24
950.0	16.64	17.13	17.99	11.61	12.45	13.77
970.0	16.31	16.70	17.54	11.20	11.95	13.21
990.0	15.99	16.39	17.19	10.86	11.60	12.85
1010.0	15.82	16.14	16.86	10.76	11.40	12.58
1030.0	15.87	16.09	16.69	10.51	11.06	12.12
1050.0	16.06	16.25	16.70	10.27	10.80	11.78
1070.0	16.16	16.37	16.65	10.26	10.64	11.49
1090.0	16.36	16.58	16.71	10.18	10.46	11.19
1110.0	17.01	17.20	17.22	10.16	10.41	10.96
1130.0	17.30	17.43	17.32	10.26	10.45	10.84
1150.0	17.64	17.83	17.55	10.46	10.67	10.80
1170.0	18.15	18.11	17.72	10.65	10.79	10.81
1190.0	18.76	18.58	17.94	10.97	11.12	10.97
1210.0	19.22	18.83	18.05	11.38	11.46	11.12
1230.0	19.85	19.21	18.17	11.77	11.65	11.13
1250.0	20.46	19.53	18.26	12.39	12.03	11.36
1270.0	20.86	19.68	18.27	13.00	12.40	11.61
1290.0	21.44	20.02	18.46	13.75	12.87	11.86
1310.0	22.06	20.18	18.40	14.49	13.30	12.05
1330.0	22.36	20.33	18.46	15.35	13.79	12.24
1350.0	22.56	20.32	18.35	16.11	14.23	12.39
1360.0	22.70	20.32	18.21	16.59	14.54	12.55
1380.0	23.23	20.52	18.08	17.66	15.06	12.71
1390.0	23.62	20.64	18.09	18.21	15.38	12.85
1410.0	23.64	20.64	17.65	19.10	15.83	12.87
1420.0	23.72	20.55	17.56	19.35	16.05	12.93
1440.0	22.83	19.90	16.84	19.20	15.87	12.70
1450.0	22.41	19.67	16.65	19.11	16.00	12.77

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		0	+3	+6
680.0	710.0	12.36	14.34	15.55
700.0	730.0	12.16	13.97	15.07
720.0	750.0	12.31	13.96	15.03
740.0	770.0	12.27	13.72	14.59
760.0	790.0	12.48	13.69	14.33
780.0	810.0	12.53	13.70	14.16
800.0	830.0	12.48	13.57	13.66
820.0	850.0	12.44	13.53	13.66
840.0	870.0	12.41	13.37	13.06
860.0	890.0	12.13	13.06	12.78
880.0	910.0	11.80	12.56	12.30
900.0	930.0	11.59	12.20	12.00
920.0	950.0	11.04	11.68	11.49
940.0	970.0	10.94	11.40	11.12
960.0	990.0	10.63	10.89	10.68
980.0	1010.0	10.48	10.54	10.11
1000.0	1030.0	10.42	10.25	9.90
1020.0	1050.0	10.48	10.31	9.81
1040.0	1070.0	10.28	9.97	9.59
1060.0	1090.0	10.83	10.25	9.75
1080.0	1110.0	10.95	10.38	10.02
1100.0	1130.0	11.73	10.90	10.50
1120.0	1150.0	11.88	11.04	10.79
1140.0	1170.0	12.96	11.65	11.44
1160.0	1190.0	13.43	11.97	11.72
1180.0	1210.0	14.20	12.61	12.16
1200.0	1230.0	14.51	12.90	12.34
1220.0	1250.0	15.04	13.41	12.77
1240.0	1270.0	15.39	13.58	12.70
1260.0	1290.0	16.21	14.06	12.92
1280.0	1310.0	16.59	14.29	12.86
1300.0	1330.0	16.98	14.36	12.93
1320.0	1350.0	16.81	13.99	12.80
1330.0	1360.0	16.92	14.00	13.00
1350.0	1380.0	16.76	13.59	12.63
1360.0	1390.0	16.84	13.76	12.83
1380.0	1410.0	16.51	13.57	12.91
1390.0	1420.0	16.02	13.35	12.60
1410.0	1440.0	15.28	13.27	12.81
1420.0	1450.0	14.97	13.07	12.62

Frequency Mixer

MBA-10L

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		0	+3	+6		0	+3	+6		0	+3	+6
680.0	710.0	6.91	5.44	4.70	710.0	5.70	3.07	2.85	10.0	2.93	2.36	2.04
700.0	730.0	5.89	4.79	4.13	730.0	4.56	2.66	2.62	30.0	2.90	2.36	2.05
720.0	750.0	5.02	4.20	3.64	750.0	3.56	2.33	2.43	50.0	2.95	2.39	2.08
740.0	770.0	4.28	3.71	3.25	770.0	2.83	2.09	2.32	70.0	3.02	2.43	2.12
760.0	790.0	3.74	3.31	2.95	790.0	2.36	1.91	2.26	90.0	3.06	2.49	2.19
780.0	810.0	3.34	2.99	2.72	810.0	2.03	1.77	2.21	110.0	3.14	2.57	2.27
800.0	830.0	2.99	2.71	2.51	830.0	1.75	1.63	2.15	130.0	3.11	2.57	2.28
820.0	850.0	2.67	2.47	2.31	850.0	1.51	1.52	2.09	150.0	3.19	2.64	2.35
840.0	870.0	2.45	2.27	2.16	870.0	1.33	1.44	2.05	170.0	3.26	2.71	2.42
860.0	890.0	2.21	2.06	1.97	890.0	1.21	1.39	2.04	190.0	3.38	2.83	2.54
880.0	910.0	2.03	1.89	1.83	910.0	1.15	1.37	2.02	210.0	3.39	2.86	2.58
900.0	930.0	1.87	1.73	1.69	930.0	1.19	1.38	1.99	230.0	3.40	2.87	2.60
920.0	950.0	1.70	1.60	1.58	950.0	1.30	1.40	1.97	250.0	3.43	2.91	2.64
940.0	970.0	1.55	1.46	1.48	970.0	1.43	1.45	1.97	270.0	3.56	3.02	2.75
960.0	990.0	1.40	1.35	1.38	990.0	1.56	1.51	1.97	290.0	3.58	3.03	2.76
980.0	1010.0	1.29	1.25	1.30	1010.0	1.69	1.58	1.97	310.0	3.54	3.02	2.77
1000.0	1030.0	1.15	1.15	1.24	1030.0	1.84	1.66	1.99	330.0	3.56	3.01	2.76
1020.0	1050.0	1.07	1.13	1.23	1050.0	2.01	1.75	2.00	350.0	3.52	3.01	2.76
1040.0	1070.0	1.10	1.20	1.30	1070.0	2.15	1.83	2.01	370.0	3.56	3.02	2.75
1060.0	1090.0	1.20	1.30	1.38	1090.0	2.29	1.91	2.03	390.0	3.48	3.00	2.76
1080.0	1110.0	1.34	1.41	1.47	1110.0	2.45	1.99	2.04	410.0	3.48	2.95	2.71
1100.0	1130.0	1.47	1.53	1.59	1130.0	2.63	2.07	2.05	430.0	3.40	2.90	2.68
1120.0	1150.0	1.62	1.68	1.73	1150.0	2.81	2.16	2.06	450.0	3.40	2.88	2.63
1140.0	1170.0	1.79	1.84	1.88	1170.0	3.02	2.25	2.05	470.0	3.34	2.84	2.63
1160.0	1190.0	1.94	1.97	2.01	1190.0	3.27	2.35	2.04	490.0	3.35	2.82	2.58
1180.0	1210.0	2.10	2.10	2.13	1210.0	3.54	2.45	2.04	510.0	3.28	2.78	2.57
1200.0	1230.0	2.27	2.25	2.29	1230.0	3.76	2.53	2.03	530.0	3.27	2.78	2.55
1220.0	1250.0	2.46	2.39	2.41	1250.0	3.93	2.57	2.00	550.0	3.30	2.81	2.58
1240.0	1270.0	2.69	2.59	2.61	1270.0	4.11	2.62	1.99	590.0	3.37	2.86	2.60
1260.0	1290.0	2.89	2.72	2.68	1290.0	4.39	2.71	2.00	610.0	3.35	2.89	2.63
1280.0	1310.0	3.11	2.89	2.85	1310.0	4.62	2.78	2.02	650.0	3.52	3.01	2.71
1300.0	1330.0	3.24	3.00	2.95	1330.0	4.70	2.82	2.04	670.0	3.71	3.16	2.80
1320.0	1350.0	3.46	3.20	3.16	1350.0	4.78	2.87	2.08	710.0	3.96	3.33	2.91
1330.0	1360.0	3.52	3.28	3.24	1360.0	4.86	2.92	2.10	730.0	3.90	3.33	2.94
1350.0	1380.0	3.76	3.45	3.38	1380.0	5.20	3.09	2.15	770.0	4.08	3.44	3.00
1360.0	1390.0	3.90	3.54	3.47	1390.0	5.46	3.19	2.17	790.0	4.11	3.44	2.98
1380.0	1410.0	4.12	3.67	3.57	1410.0	5.89	3.38	2.21	830.0	4.02	3.32	2.89
1390.0	1420.0	4.22	3.73	3.62	1420.0	5.99	3.42	2.20	850.0	3.94	3.23	2.80
1410.0	1440.0	4.30	3.82	3.70	1440.0	6.03	3.41	2.19	890.0	3.80	3.02	2.61
1420.0	1450.0	4.41	3.90	3.79	1450.0	6.01	3.41	2.19	910.0	3.64	2.83	2.43

REV. X3

MBA-10L

101012

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+14	8	15	30	17	21	19	30	24	32
1	-	3	+0	12	20	32	39	36	35	33	35	37
2	>90	36	30	43	44	47	49	55	49	45	50	51
3	>90	57	53	44	48	49	50	65	>66	59	62	60
4	>90	>66	>66	>66	60	65	60	66	>66	>66	>66	>66
5	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
6	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
7	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
8	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
9	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
10	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900 MHz; -15.00 dBm.
LO IN: 930 MHz; +3.00 dBm
IF OUT: 30 MHz; -23.67 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	22	29	38	29	34	35	46	45	53
1	-	2	+0	17	21	39	44	42	42	42	43	52
2	70	31	23	29	39	51	42	52	50	45	45	54
3	>90	44	53	31	40	35	42	57	61	56	55	49
4	>90	63	57	54	46	45	52	50	65	62	71	58
5	>90	56	76	73	60	50	50	55	56	64	>77	66
6	>90	75	67	>77	71	67	53	61	61	64	72	>77
7	>90	73	75	75	>77	>77	66	73	65	66	72	>77
8	>90	>77	>77	>77	76	>77	>77	>77	63	65	69	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	71	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900 MHz; -5.00 dBm.
LO IN: 930 MHz; +3.00 dBm
IF OUT: 30 MHz; -13.33 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X3
MBA-10L
101012
Page 5 of 5




Typical Performance Curves


Conversion Loss @ IF=30MHz

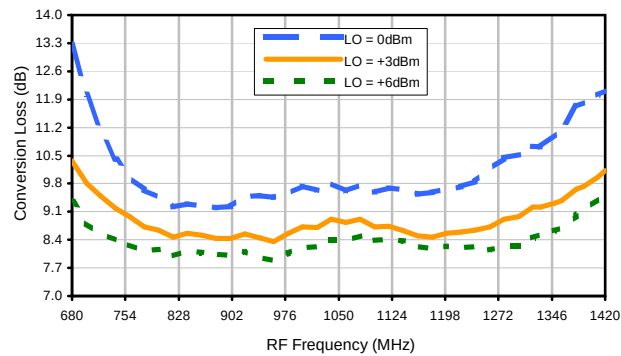


Conversion Loss vs. LO @ RF=900MHz

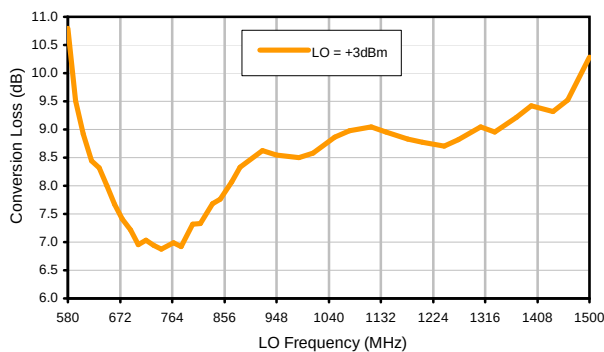


Conversion Loss vs. IF @ RF=900MHz

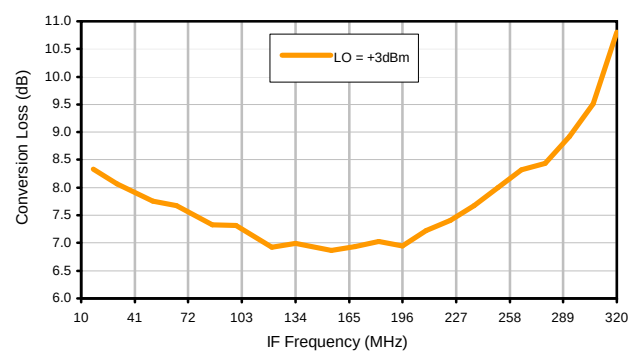


Conversion Loss vs. IF @ RF=789.9MHz

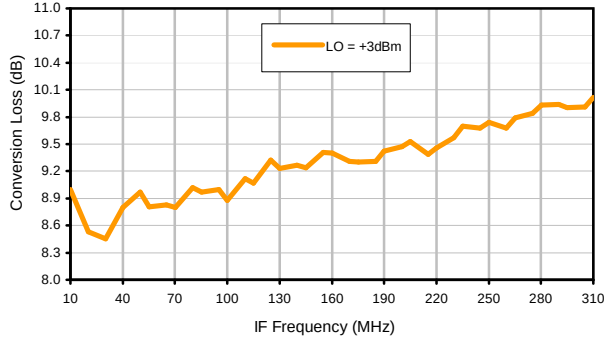


Conversion Loss vs. IF @ RF=1010.1MHz

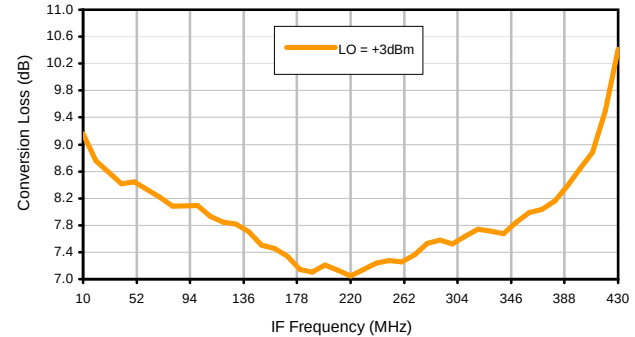

IP3 Input

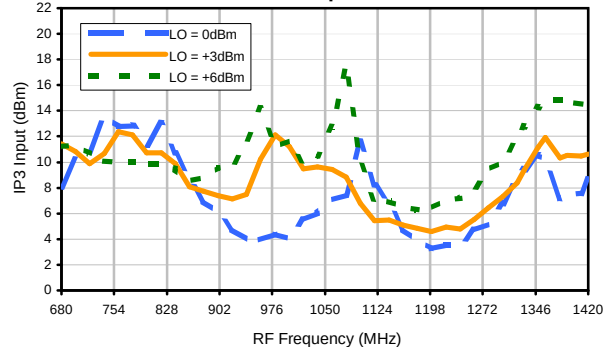


Compression @ RF IN=0dBm

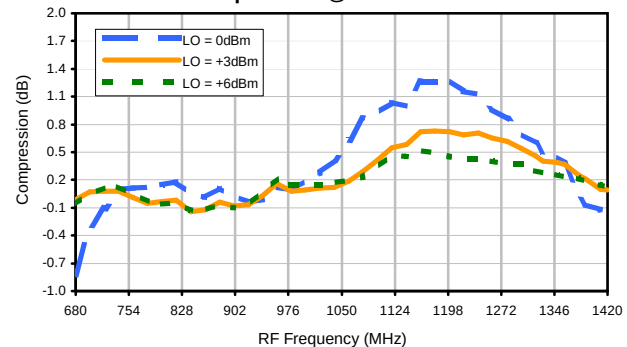


Typical Performance Curves


LO-RF Isolation

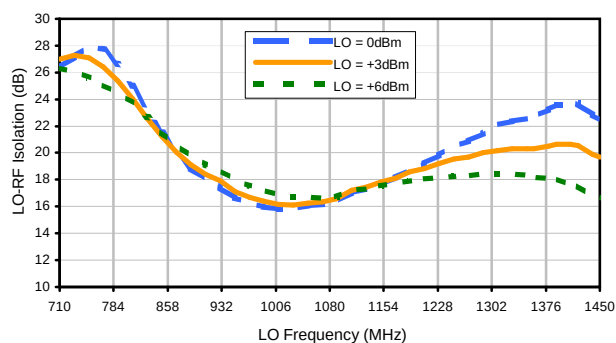


LO-IF Isolation

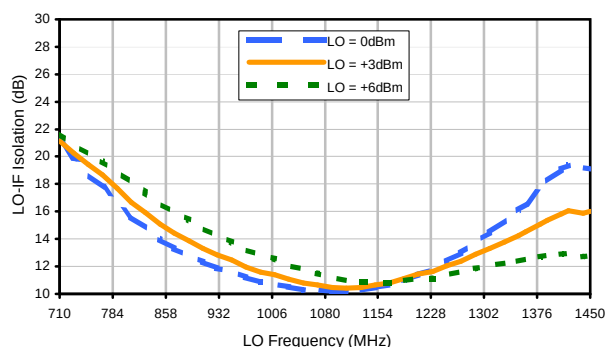


RF-IF Isolation

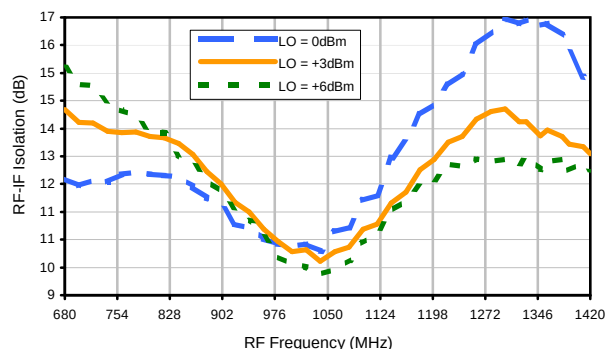


RF VSWR

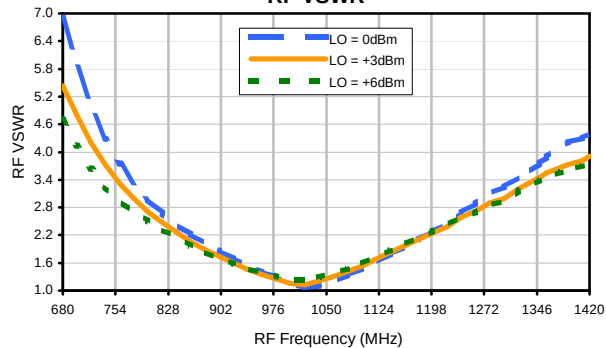

LO VSWR

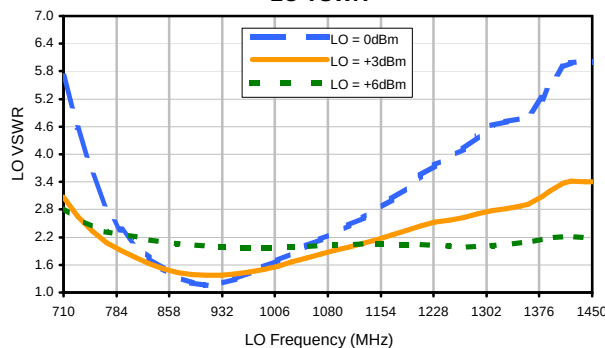

IF VSWR

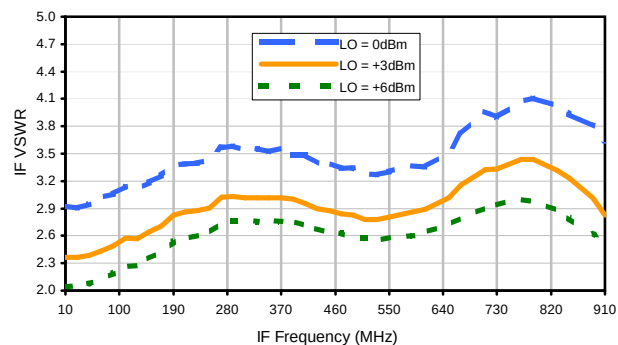

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+14	8	15	30	17	21	19	30	24	32
1	-	3	+0	12	20	32	39	36	35	33	35	37
2	>90	36	30	43	44	47	49	55	49	45	50	51
3	>90	57	53	44	48	49	50	65	>66	59	62	60
4	>90	>66	>66	>66	60	65	60	66	>66	>66	>66	>66
5	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
6	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
7	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
8	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
9	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
10	>90	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66	>66
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900 MHz; -15.00 dBm.
LO IN: 930 MHz; +3.00 dBm
IF OUT: 30 MHz; -23.67 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+3	22	29	38	29	34	35	46	45	53
1	-	2	+0	17	21	39	44	42	42	42	43	52
2	70	31	23	29	39	51	42	52	50	45	45	54
3	>90	44	53	31	40	35	42	57	61	56	55	49
4	>90	63	57	54	46	45	52	50	65	62	71	58
5	>90	56	76	73	60	50	50	55	56	64	>77	66
6	>90	75	67	>77	71	67	53	61	61	64	72	>77
7	>90	73	75	75	>77	>77	66	73	65	66	72	>77
8	>90	>77	>77	>77	76	>77	>77	>77	63	65	69	>77
9	>90	>77	>77	>77	>77	>77	>77	>77	>77	71	>77	>77
10	>90	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77	>77
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 900 MHz; -5.00 dBm.
LO IN: 930 MHz; +3.00 dBm
IF OUT: 30 MHz; -13.33 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Case Style


SM2

SM2

Outline Dimensions

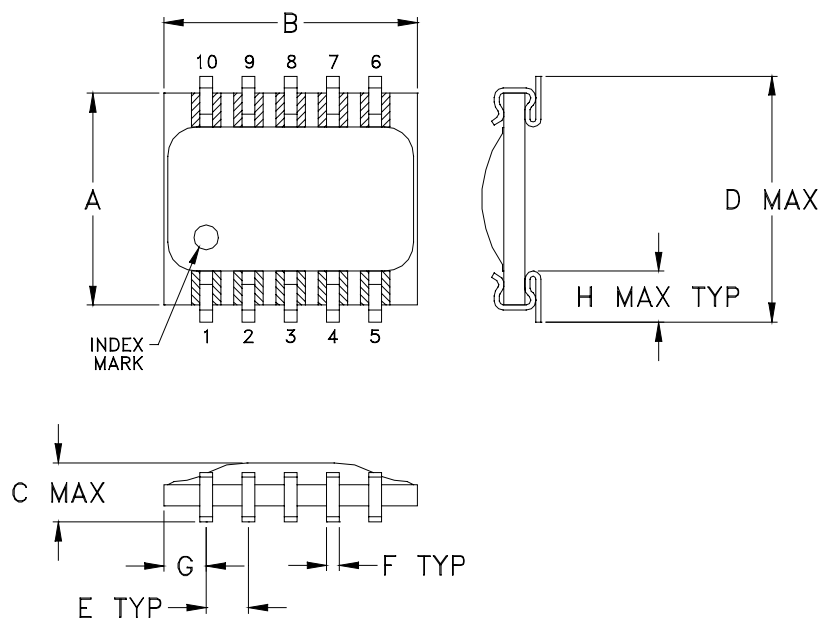

PCB Land Pattern

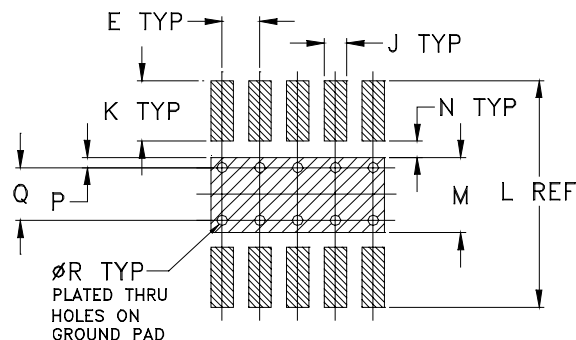

Suggested Layout,
Tolerance to be within ± 0.002

ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P
SM2	.250 (6.35)	.300 (7.62)	.095 (2.41)	.290 (7.37)	.050 (1.27)	.015 (0.38)	.050 (1.27)	.060 (1.52)	.030 (0.76)	.080 (2.03)	.300 (7.62)	.100 (2.54)	.020 (0.51)	.015 (0.38)

CASE #	Q	R	WT. GRAM
SM2	.070 (1.78)	.014 (0.36)	.3

Dimensions are in inches (mm). Tolerances: $\pm .005$

Notes:

- Case material: Plastic encapsulation on Ceramic base.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F34

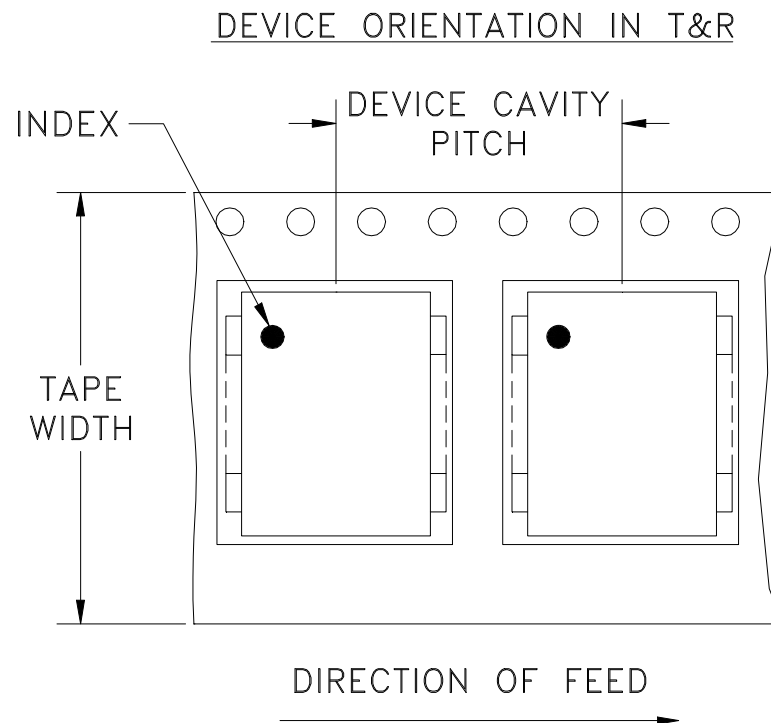

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	GF	DJ
A	M102713	UPDATED NOTES, ADDED "...WITH SMOBC"	01/16/06	GT	IL


SUGGESTED MOUNTING CONFIGURATION FOR SM2 CASE STYLE, "Id" PIN CONNECTION

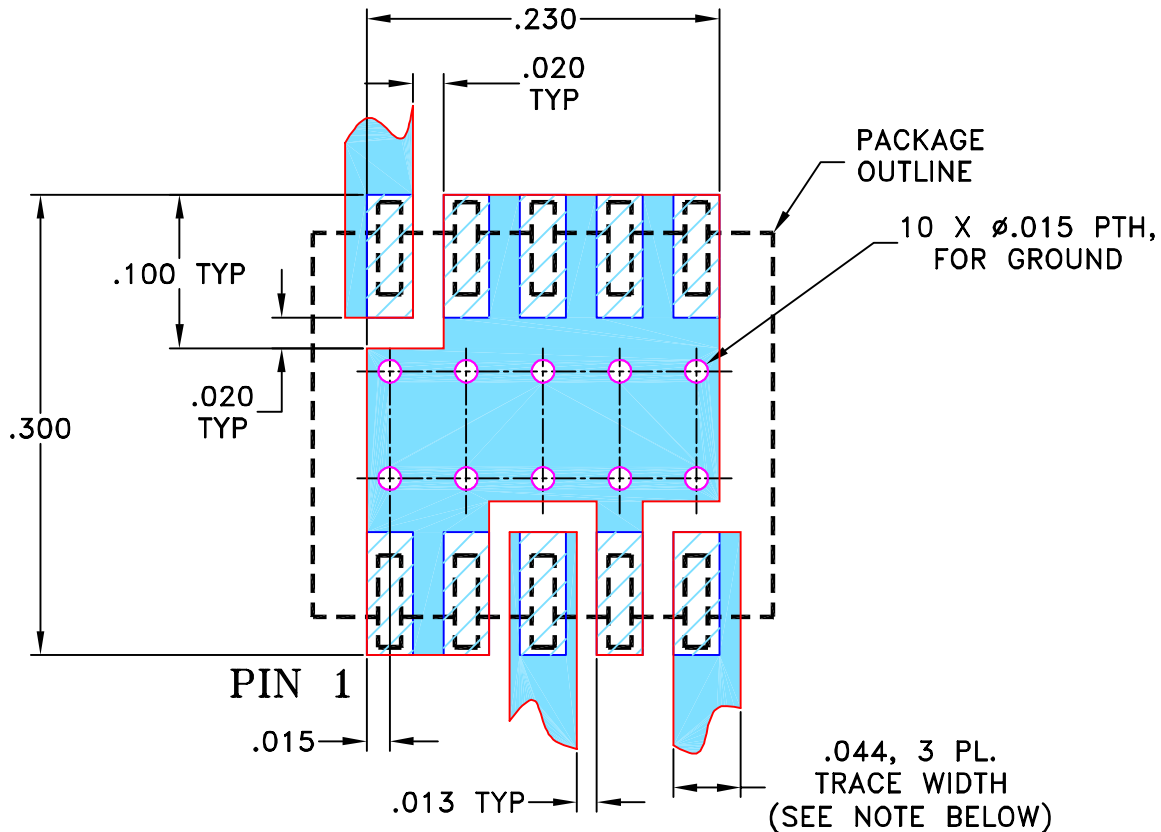

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020'' \pm 0.0015''$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

GF

07/18/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$

APPROVED

DJ

08/02/02

3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$
 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VEEDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, Id, SM2, MBA, TB-99

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-066

REV:

A

FILE:

98PL066


SCALE:

8:1


SHEET:

1 OF 1

Evaluation Board and Circuit

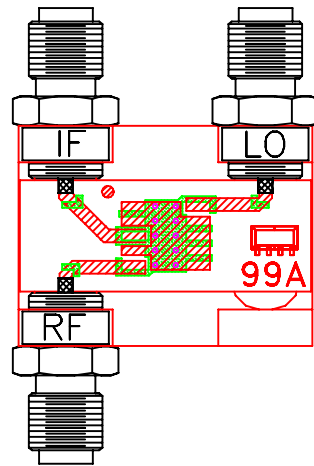

TB-99

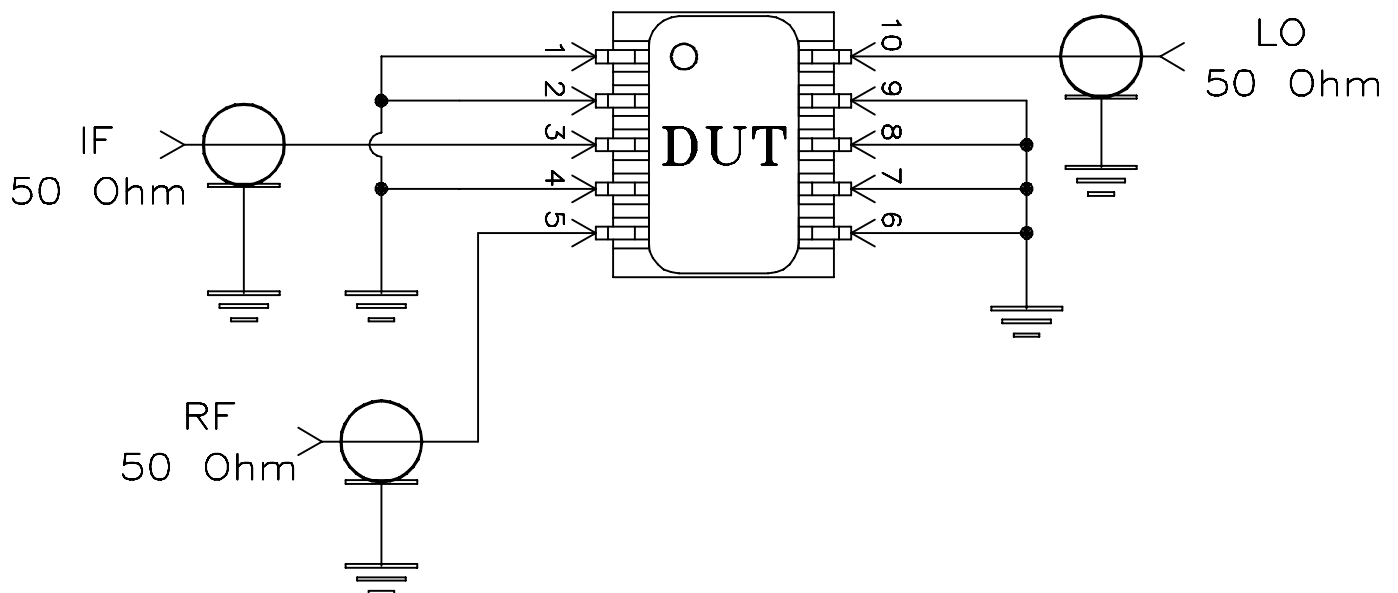

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215