

Level 7 (LO Power +7 dBm) 1 to 500 MHz



Units are not marked with NL suffix

CASE STYLE: YY101

Price: Contact Sales Dept.

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections


LO	8
RF	1
IF	3,4^
GROUND	2,5,6,7

^ pins must be connected together externally

Outline Drawing

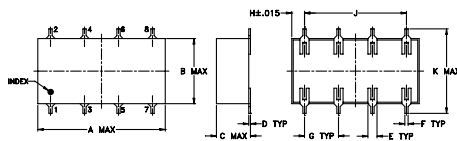


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

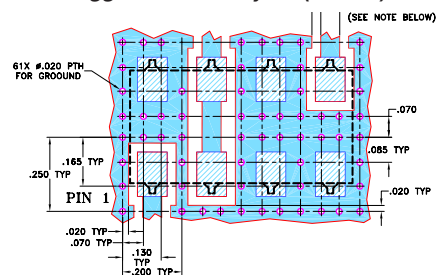Demo Board MCL P/N: TB-170
Suggested PCB Layout (PL-084)

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.030" \pm 0.002"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low conversion loss, 5.72 dB typ.
- excellent L-R & L-I isolation, 45 dB typ.
- IF response to DC

Applications

- VHF/UHF
- defense-federal communications
- instrumentation

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f_L - f_U	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U		
		$\overline{X}$	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	
1-500	DC-500	5.72	0.10	7.0	8.0	60	40	45	35	40	30	50	40	45	35	40	25	10


1 dB COMP.: +1 dBm typ.

L = low range [f_L to $10 f_L$]m = mid band [$2 f_L$ to $f_U/2$]M = mid range [$10 f_L$ to $f_U/2$]U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1.00	31.00	6.20	72.88	66.78	1.23	2.68
2.00	32.00	6.16	72.45	67.15	1.14	2.55
5.00	35.00	5.16	72.07	67.07	1.11	2.69
10.00	40.00	5.46	70.97	66.57	1.12	2.66
20.00	50.00	5.51	68.99	65.69	1.13	2.52
32.19	62.19	5.48	65.97	64.17	1.13	2.50
50.00	80.00	5.52	62.51	62.11	1.15	2.48
78.97	48.97	5.53	59.28	58.98	1.15	2.49
100.00	70.00	5.46	57.50	57.03	1.16	2.50
125.75	95.75	5.33	56.16	55.12	1.17	2.52
156.94	126.94	5.36	54.05	52.46	1.19	2.54
188.13	158.13	5.50	51.97	51.08	1.22	2.54
219.31	189.31	5.56	50.13	49.66	1.27	2.53
250.00	220.00	5.61	50.85	46.65	1.30	2.50
281.69	251.69	5.72	48.93	45.50	1.36	2.56
328.47	298.47	5.69	46.10	46.51	1.47	2.61
375.25	345.25	5.80	43.70	44.36	1.67	2.59
422.03	392.03	6.12	45.26	41.75	1.76	2.72
453.22	423.22	6.26	45.18	41.16	1.84	2.87
500.00	470.00	6.56	43.13	42.64	1.92	3.00







Electrical Schematic

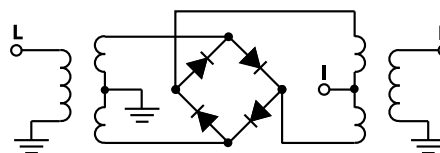

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



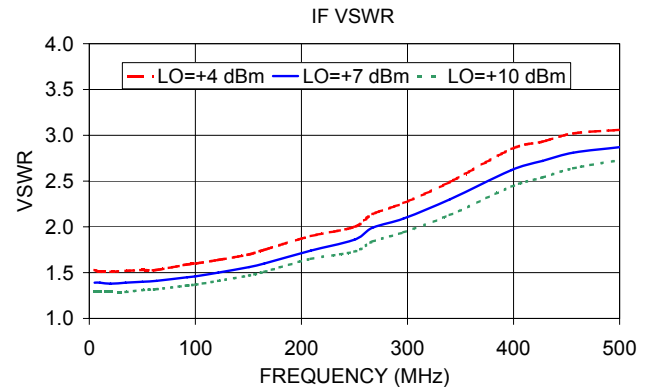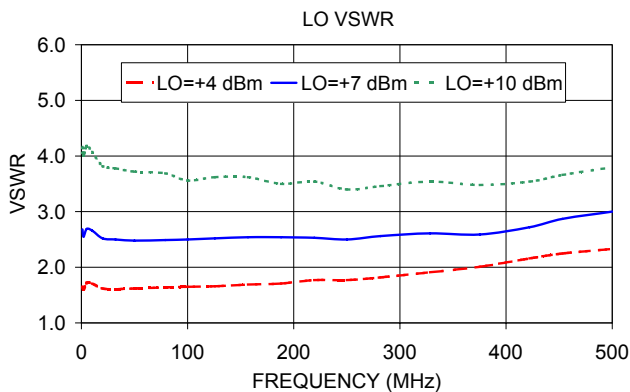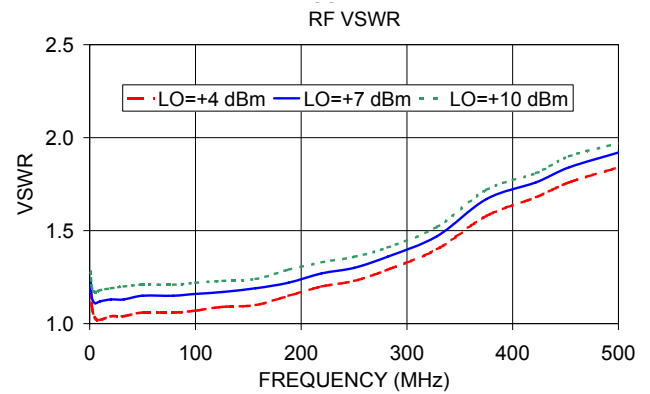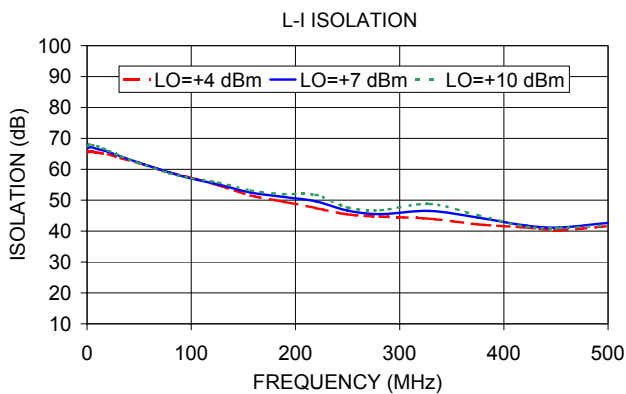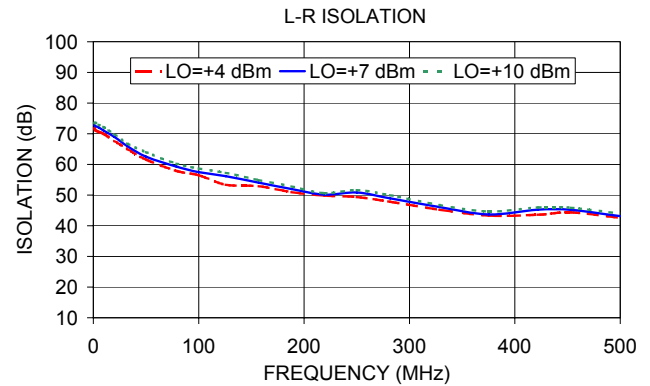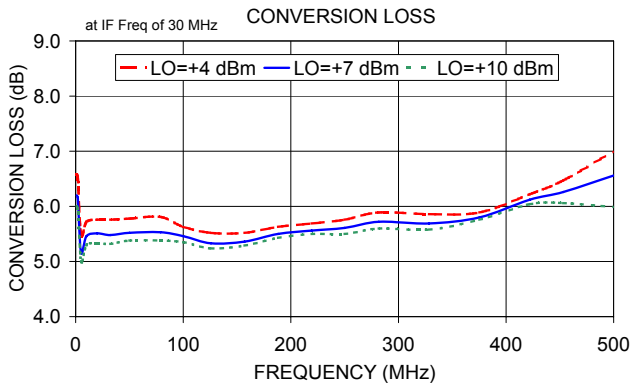

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SCM-1NL+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+4	+7	+10	+4	+7	+10	+4	+7	+10	+4	+7	+10			
1.0	31.0	6.58	6.20	6.00	10.1	40.1	17.20	16.57	26.49	10.1	40.1	1.56	1.23	0.96
2.0	32.0	6.53	6.16	5.97	29.9	59.9	21.93	19.53	22.48	29.9	59.9	1.43	1.19	0.89
5.0	35.0	5.48	5.16	5.00	49.7	79.7	17.74	21.95	24.06	49.7	79.7	1.45	1.13	0.88
10.0	40.0	5.72	5.46	5.30	69.4	99.4	20.19	24.52	20.76	69.4	99.4	1.42	1.08	0.85
29.9	59.9	5.70	5.35	5.24	89.2	119.2	16.06	23.84	19.89	89.2	119.2	1.28	1.09	0.80
49.7	79.7	5.69	5.42	5.29	109.0	139.0	23.09	20.18	17.98	109.0	139.0	1.33	0.99	0.75
69.4	99.4	5.63	5.45	5.29	128.8	158.8	21.75	19.22	19.01	128.8	158.8	1.27	1.03	0.77
89.2	119.2	5.67	5.42	5.32	148.5	178.5	22.77	20.61	20.12	148.5	178.5	1.28	0.97	0.75
109.0	139.0	5.65	5.43	5.32	168.3	198.3	20.59	20.23	19.02	168.3	198.3	1.26	0.96	0.74
128.8	158.8	5.70	5.43	5.35	188.1	218.1	17.88	17.08	17.35	188.1	218.1	1.25	0.92	0.72
148.5	178.5	5.69	5.45	5.35	207.9	237.9	15.95	17.58	19.00	207.9	237.9	1.23	0.95	0.72
188.1	218.1	5.74	5.52	5.41	227.7	257.7	16.36	15.56	16.35	227.7	257.7	1.25	0.95	0.76
207.9	237.9	5.71	5.51	5.40	247.4	277.4	13.90	12.99	14.54	247.4	277.4	1.15	0.88	0.68
227.7	257.7	5.78	5.56	5.46	267.2	297.2	14.42	15.63	18.83	267.2	297.2	1.21	0.94	0.75
247.4	277.4	5.80	5.59	5.46	287.0	317.0	14.49	16.34	24.65	287.0	317.0	1.21	0.95	0.75
267.2	297.2	5.87	5.63	5.49	306.8	336.8	15.29	14.43	16.86	306.8	336.8	1.18	0.93	0.73
287.0	317.0	5.88	5.65	5.48	326.5	356.5	15.68	14.77	17.58	326.5	356.5	1.26	0.96	0.75
306.8	336.8	5.98	5.74	5.60	346.3	376.3	17.53	17.91	20.54	346.3	376.3	1.36	1.05	0.82
326.5	356.5	6.03	5.79	5.65	366.1	396.1	16.32	25.40	20.84	366.1	396.1	1.42	1.12	0.88
346.3	376.3	6.02	5.76	5.66	385.9	415.9	10.89	15.77	21.75	385.9	415.9	1.47	1.15	0.91
366.1	396.1	6.16	5.89	5.68	405.7	435.7	9.12	10.79	14.75	405.7	435.7	1.56	1.30	1.05
385.9	415.9	6.15	5.89	5.72	425.4	455.4	8.25	9.04	12.36	425.4	455.4	1.64	1.32	1.07
405.7	435.7	6.24	5.97	5.80	445.2	475.2	7.51	8.05	9.44	445.2	475.2	1.81	1.46	1.21
445.2	475.2	6.43	6.21	6.03	465.0	495.0	7.13	7.79	8.86	465.0	495.0	1.94	1.57	1.28
465.0	495.0	6.50	6.21	6.07	484.8	514.8	7.29	8.49	9.79	484.8	514.8	2.05	1.65	1.37
484.8	514.8	6.51	6.28	6.08	504.5	534.5	7.29	9.16	11.77	504.5	534.5	2.20	1.81	1.53
504.5	534.5	6.63	6.32	6.13	524.3	554.3	8.10	11.69	16.75	524.3	554.3	2.21	1.81	1.52
524.3	554.3	6.62	6.29	6.07	544.1	574.1	8.86	14.08	22.59	544.1	574.1	2.44	2.02	1.70
544.1	574.1	6.73	6.29	6.10	583.7	613.7	7.98	19.40	17.77	583.7	613.7	2.34	2.05	1.66
583.7	613.7	7.07	6.43	6.16	603.4	633.4	6.26	13.86	16.63	603.4	633.4	2.33	2.11	1.76
603.4	633.4	7.26	6.58	6.18	643.0	673.0	5.33	9.10	15.05	643.0	673.0	2.12	1.99	1.78
643.0	673.0	7.79	7.01	6.43	662.8	692.8	5.62	8.78	14.77	662.8	692.8	1.97	1.86	1.67
662.8	692.8	7.84	7.11	6.50	702.3	732.3	6.15	8.50	12.32	702.3	732.3	1.79	1.68	1.54
702.3	732.3	8.32	7.56	6.93	722.1	752.1	5.88	8.15	10.61	722.1	752.1	1.56	1.47	1.38
722.1	752.1	8.71	8.00	7.38	761.7	791.7	5.50	6.77	8.82	761.7	791.7	1.45	1.35	1.29
781.4	811.4	9.54	8.91	8.28	781.4	811.4	5.39	6.24	8.02	781.4	811.4	1.23	1.06	1.04
821.0	851.0	9.94	9.41	8.91	821.0	851.0	5.56	5.46	6.24	821.0	851.0	1.18	1.02	0.96
840.8	870.8	10.25	9.63	9.09	840.8	870.8	5.38	5.41	6.10	840.8	870.8	1.11	0.97	0.91
880.3	910.3	10.69	10.12	9.56	880.3	910.3	6.41	6.45	7.56	880.3	910.3	1.02	0.89	0.91
900.1	930.1	10.72	10.22	9.73	900.1	930.1	7.38	7.27	8.91	900.1	930.1	0.95	0.86	0.91

REV. X2
SCM-1NL+
100818
Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

SCM-1NL+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
240.0	10.1	5.58	10.0	20.1	5.30	490.0	10.1	6.22
234.1	16.0	5.58	22.3	32.4	5.13	477.7	22.4	6.14
228.2	21.9	5.51	34.6	44.7	5.12	465.4	34.7	6.08
222.3	27.8	5.50	46.9	57.0	5.17	453.1	47.0	6.09
216.4	33.7	5.48	59.2	69.3	5.15	440.8	59.3	6.14
210.5	39.6	5.47	71.5	81.6	5.16	428.5	71.6	6.09
204.6	45.5	5.48	83.8	93.9	5.16	416.2	83.9	6.05
198.7	51.4	5.45	96.2	106.3	5.16	403.8	96.3	6.04
192.8	57.3	5.43	108.5	118.6	5.16	391.5	108.6	6.01
186.9	63.2	5.41	120.8	130.9	5.16	379.2	120.9	6.05
181.0	69.1	5.44	133.1	143.2	5.16	366.9	133.2	6.07
175.1	75.0	5.45	145.4	155.5	5.20	354.6	145.5	6.04
169.2	80.9	5.44	157.7	167.8	5.26	342.3	157.8	6.06
163.3	86.8	5.42	170.0	180.1	5.22	330.0	170.1	6.06
157.4	92.7	5.42	182.3	192.4	5.25	317.7	182.4	6.05
151.5	98.6	5.43	194.6	204.7	5.24	305.4	194.7	6.09
145.6	104.5	5.45	206.9	217.0	5.25	293.1	207.0	6.06
139.7	110.4	5.46	219.2	229.3	5.28	280.8	219.3	6.06
133.8	116.3	5.44	231.5	241.6	5.28	268.5	231.6	6.10
127.9	122.2	5.41	243.8	253.9	5.30	256.2	243.9	6.11
122.1	128.0	5.42	256.2	266.3	5.34	243.8	256.3	6.17
116.2	133.9	5.44	268.5	278.6	5.29	231.5	268.6	6.16
110.3	139.8	5.47	280.8	290.9	5.34	219.2	280.9	6.12
104.4	145.7	5.47	293.1	303.2	5.35	206.9	293.2	6.17
98.5	151.6	5.45	305.4	315.5	5.35	194.6	305.5	6.16
92.6	157.5	5.46	317.7	327.8	5.42	182.3	317.8	6.14
86.7	163.4	5.46	330.0	340.1	5.44	170.0	330.1	6.18
80.8	169.3	5.48	342.3	352.4	5.46	157.7	342.4	6.19
74.9	175.2	5.48	354.6	364.7	5.49	145.4	354.7	6.17
69.0	181.1	5.47	366.9	377.0	5.51	133.1	367.0	6.17
63.1	187.0	5.46	379.2	389.3	5.52	120.8	379.3	6.15
57.2	192.9	5.47	391.5	401.6	5.53	108.5	391.6	6.14
51.3	198.8	5.49	403.8	413.9	5.48	96.2	403.9	6.18
45.4	204.7	5.51	416.2	426.3	5.59	83.8	416.3	6.16
39.5	210.6	5.53	428.5	438.6	5.59	71.5	428.6	6.23
33.6	216.5	5.53	440.8	450.9	5.55	59.2	440.9	6.27
27.7	222.4	5.52	453.1	463.2	5.50	46.9	453.2	6.24
21.8	228.3	5.55	465.4	475.5	5.46	34.6	465.5	6.30
15.9	234.2	5.57	477.7	487.8	5.42	22.3	477.8	6.35
10.0	240.1	5.66	490.0	500.1	5.38	10.0	490.1	6.41

REV. X2
SCM-1NL+
100818
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

SCM-1NL+

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
1.0	71.78	72.88	73.48	65.58	66.78	67.58
2.0	71.15	72.45	73.65	65.65	67.15	68.05
5.0	70.67	72.07	72.97	65.67	67.07	67.77
10.0	69.97	70.97	72.17	65.37	66.57	67.47
29.9	59.00	60.81	62.36	61.78	62.73	62.05
49.7	54.88	56.45	58.18	60.63	60.96	61.51
69.4	51.66	53.55	55.32	58.79	60.68	59.12
89.2	49.56	51.53	53.33	57.51	58.39	57.35
109.0	47.77	49.77	51.60	56.01	57.00	56.31
128.8	46.83	48.98	50.63	53.79	55.11	54.76
148.5	45.65	47.70	49.45	52.16	53.70	53.53
188.1	43.80	45.72	47.28	48.95	51.10	51.83
207.9	42.99	45.04	46.64	47.51	49.71	50.63
227.7	42.33	44.30	45.93	46.36	48.66	49.89
247.4	41.37	43.43	45.09	45.16	47.64	49.00
267.2	41.03	42.85	44.53	44.04	46.54	48.26
287.0	40.47	42.15	43.69	43.17	45.39	47.26
306.8	39.84	41.81	43.48	42.26	44.66	46.31
326.5	39.76	41.76	43.46	41.59	44.31	46.15
346.3	39.53	41.26	42.93	40.66	43.22	45.66
366.1	39.30	41.11	42.60	40.15	42.86	45.36
385.9	38.47	40.27	41.80	39.40	42.16	44.99
405.7	38.51	40.65	42.36	39.16	41.91	44.37
445.2	37.23	39.41	41.42	37.58	40.45	43.09
465.0	37.33	39.43	41.35	37.52	40.31	43.01
484.8	36.51	38.65	40.67	36.49	39.14	41.94
504.5	36.16	38.27	40.27	36.29	38.93	41.70
524.3	35.43	37.50	39.52	35.83	38.35	41.10
544.1	35.50	37.73	39.95	35.60	38.18	40.91
583.7	34.80	37.30	39.67	35.34	37.86	40.61
603.4	35.12	37.59	39.83	35.85	38.35	41.06
643.0	34.67	37.28	39.63	36.07	38.69	41.07
662.8	34.05	36.61	39.22	35.55	38.41	40.85
702.3	34.38	36.82	39.30	35.60	38.70	41.65
722.1	34.53	37.03	39.74	35.08	38.05	41.28
781.4	35.84	38.43	41.32	34.21	35.79	37.09
821.0	36.95	39.66	42.51	33.48	34.35	34.86
840.8	37.27	39.91	42.88	33.34	33.82	34.10
880.3	38.34	40.94	43.45	32.69	32.62	32.45
900.1	38.45	41.14	43.27	32.21	32.00	31.61

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
10.1	40.1	43.36	44.14	50.29
29.9	59.9	41.81	42.55	41.55
49.7	79.7	37.80	38.48	38.81
69.4	99.4	34.74	35.66	36.08
89.2	119.2	33.47	33.95	34.43
109.0	139.0	32.03	32.53	32.86
128.8	158.8	31.21	31.65	32.25
148.5	178.5	30.40	30.95	31.45
168.3	198.3	30.05	30.62	31.06
188.1	218.1	29.95	30.62	31.12
207.9	237.9	29.49	30.40	31.13
227.7	257.7	29.54	30.58	31.45
247.4	277.4	29.33	30.32	31.07
267.2	297.2	29.29	30.27	31.12
287.0	317.0	29.80	30.69	31.54
306.8	336.8	29.95	30.78	31.45
326.5	356.5	31.06	32.24	32.96
346.3	376.3	31.07	32.44	33.50
366.1	396.1	30.60	31.92	33.06
385.9	415.9	29.60	30.59	31.17
405.7	435.7	27.51	27.82	27.98
425.4	455.4	26.54	26.60	26.52
445.2	475.2	24.88	24.79	24.66
465.0	495.0	24.25	24.07	23.78
484.8	514.8	23.60	23.43	23.20
504.5	534.5	22.85	22.59	22.31
524.3	554.3	22.76	22.54	22.29
544.1	574.1	22.42	22.10	21.84
583.7	613.7	22.42	21.89	21.48
603.4	633.4	22.69	21.98	21.38
643.0	673.0	23.30	22.63	21.80
662.8	692.8	23.67	23.01	22.18
702.3	732.3	23.32	22.84	22.23
722.1	752.1	22.94	22.56	22.03
761.7	791.7	21.19	20.89	20.43
781.4	811.4	20.27	20.03	19.64
821.0	851.0	18.40	18.08	17.71
840.8	870.8	17.41	16.92	16.51
880.3	910.3	15.87	15.14	14.46
900.1	930.1	14.95	14.10	13.42

REV. X2
SCM-1NL+
100818
Page 3 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Frequency Mixer

SCM-1NL+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
5.0	35.0	1.19	1.23	1.28	5.0	1.65	2.68	4.16	5.0	1.53	1.39	1.29
10.0	40.0	1.09	1.14	1.19	10.0	1.60	2.55	4.01	10.0	1.51	1.39	1.29
29.9	59.9	1.14	1.06	1.00	29.9	1.94	2.82	3.87	22.6	2.01	1.84	1.68
49.7	79.7	1.12	1.05	1.03	49.7	1.96	2.81	3.91	35.1	1.93	1.75	1.61
69.4	99.4	1.10	1.03	1.04	69.4	1.88	2.65	3.62	47.7	1.84	1.66	1.53
89.2	119.2	1.12	1.04	1.06	89.2	1.89	2.72	3.72	60.3	1.83	1.66	1.53
109.0	139.0	1.08	1.05	1.08	109.0	1.86	2.63	3.61	72.8	1.88	1.71	1.57
128.8	158.8	1.08	1.05	1.08	128.8	1.94	2.75	3.76	85.4	1.93	1.76	1.63
148.5	178.5	1.08	1.07	1.10	148.5	1.94	2.74	3.73	97.9	1.97	1.81	1.67
168.3	198.3	1.08	1.07	1.11	168.3	1.90	2.65	3.58	110.5	2.00	1.83	1.69
188.1	218.1	1.07	1.09	1.12	188.1	1.95	2.74	3.67	123.1	2.01	1.83	1.70
207.9	237.9	1.07	1.11	1.14	207.9	1.94	2.71	3.65	135.6	1.98	1.81	1.67
227.7	257.7	1.08	1.10	1.14	227.7	2.04	2.84	3.81	148.2	1.93	1.77	1.65
247.4	277.4	1.08	1.11	1.14	247.4	2.01	2.78	3.70	160.8	1.92	1.77	1.65
267.2	297.2	1.09	1.11	1.15	267.2	2.05	2.81	3.72	173.3	1.96	1.81	1.69
287.0	317.0	1.11	1.14	1.18	287.0	2.07	2.77	3.63	185.9	2.03	1.88	1.75
306.8	336.8	1.12	1.15	1.18	306.8	2.07	2.81	3.70	198.5	2.08	1.92	1.80
326.5	356.5	1.13	1.17	1.20	326.5	2.15	2.91	3.79	211.0	2.09	1.94	1.81
346.3	376.3	1.15	1.20	1.24	346.3	2.17	2.89	3.76	223.6	2.05	1.90	1.79
366.1	396.1	1.15	1.21	1.26	366.1	2.28	3.06	3.93	236.2	2.01	1.87	1.75
385.9	415.9	1.17	1.23	1.29	385.9	2.19	2.87	3.70	248.7	2.01	1.87	1.76
405.7	435.7	1.16	1.21	1.27	405.7	2.27	2.98	3.80	261.3	2.05	1.91	1.80
425.4	455.4	1.17	1.21	1.26	425.4	2.34	3.05	3.89	273.8	2.10	1.96	1.86
445.2	475.2	1.16	1.20	1.23	445.2	2.34	3.05	3.87	286.4	2.12	1.99	1.88
465.0	495.0	1.16	1.19	1.22	465.0	2.48	3.20	4.02	299.0	2.09	1.96	1.86
484.8	514.8	1.18	1.20	1.22	484.8	2.39	3.07	3.86	311.5	2.06	1.94	1.84
504.5	534.5	1.20	1.21	1.22	504.5	2.51	3.20	4.01	324.1	2.05	1.93	1.83
524.3	554.3	1.25	1.26	1.27	524.3	2.50	3.16	3.94	336.7	2.06	1.94	1.85
544.1	574.1	1.32	1.31	1.32	544.1	2.59	3.25	4.01	349.2	2.08	1.96	1.87
583.7	613.7	1.52	1.49	1.49	583.7	2.66	3.25	3.97	361.8	2.07	1.97	1.88
603.4	633.4	1.65	1.60	1.60	603.4	2.82	3.43	4.15	374.4	2.07	1.96	1.88
643.0	673.0	1.96	1.88	1.84	643.0	2.98	3.65	4.35	386.9	2.08	1.97	1.89
662.8	692.8	2.12	2.04	1.98	662.8	2.90	3.52	4.23	399.5	2.11	2.00	1.91
702.3	732.3	2.52	2.41	2.31	702.3	3.05	3.67	4.37	412.1	2.12	2.00	1.92
722.1	752.1	2.76	2.65	2.54	722.1	3.08	3.69	4.42	424.6	2.08	1.97	1.89
761.7	791.7	3.20	3.07	2.95	761.7	3.17	3.75	4.45	437.2	2.04	1.93	1.86
781.4	811.4	3.45	3.32	3.20	781.4	3.29	3.87	4.57	449.7	2.03	1.93	1.86
821.0	851.0	3.82	3.72	3.60	821.0	3.39	3.97	4.66	462.3	2.07	1.96	1.88
840.8	870.8	4.00	3.88	3.76	840.8	3.45	3.95	4.61	474.9	2.11	2.00	1.92
880.3	910.3	4.27	4.12	3.98	880.3	3.52	4.00	4.62	487.4	2.11	2.01	1.94
900.1	930.1	4.31	4.18	4.04	900.1	3.50	3.90	4.51	500.0	2.22	2.29	2.34

REV. X2
SCM-1NL+
100818
Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	24	19	26	30	41	38	51	38	39
1	-	25	+0	34	11	40	16	38	35	66	49	39
2	>100	70	55	63	54	73	53	65	63	77	71	76
3	>100	67	61	67	61	75	56	72	64	>80	76	>80
4	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	79	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	66	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	68	>80
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -14.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -19.78 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	36	30	40	41	54	50	65	50	54
1	-	26	+0	35	12	40	18	43	37	66	52	48
2	>100	51	49	59	49	54	51	54	70	67	63	70
3	>100	48	41	50	42	58	38	63	41	57	57	73
4	>100	62	70	64	64	63	61	67	58	70	70	81
5	>100	70	68	69	54	66	52	70	54	64	62	79
6	>100	86	80	76	90	78	86	77	81	73	77	76
7	>100	>90	75	90	73	84	75	88	68	>90	64	74
8	>100	>90	>90	88	>90	80	>90	84	>90	85	86	>90
9	>100	>90	>90	>90	82	>90	77	90	82	71	83	>90
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	83	>90
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -4.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -9.68 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X2

SCM-1NL+

100818


Page 5 of 5

Frequency Mixer


SCM-1NL+

Typical Performance Curves


Conversion Loss @ IF=30MHz

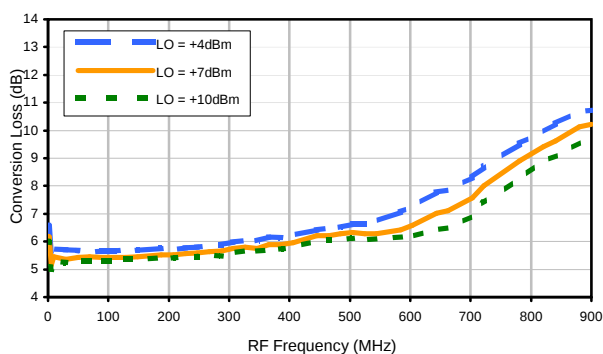


Conversion Loss vs. IF @ RF=250.1MHz

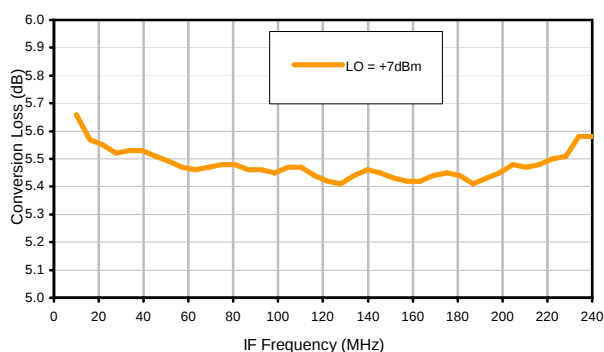


Conversion Loss vs. IF @ RF=10.1MHz

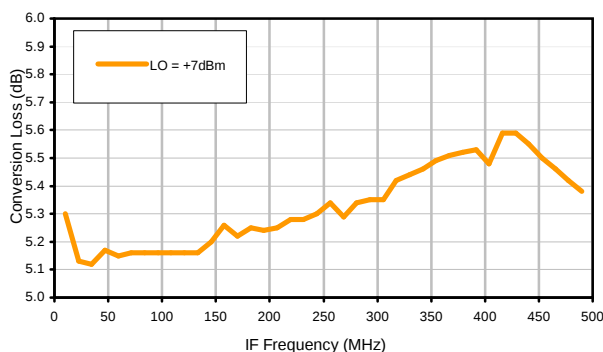


Conversion Loss vs. IF @ RF=500.1MHz

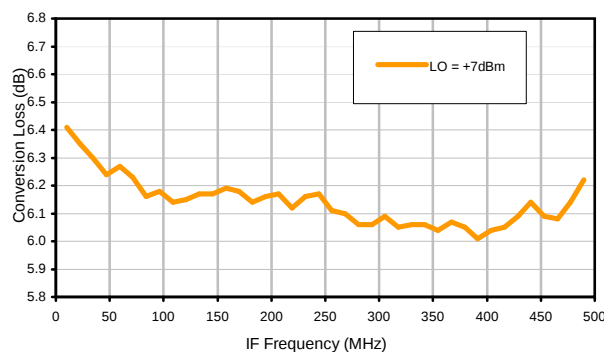

IP3 Input

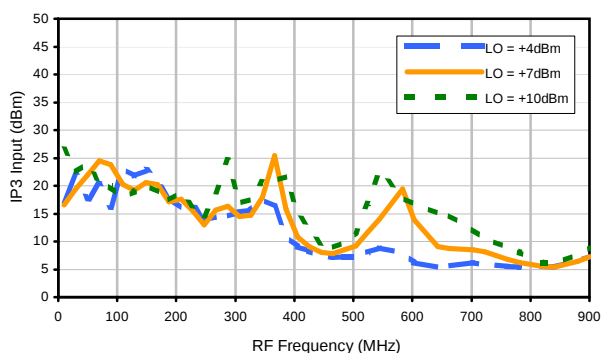

Compression @ RF IN=+1dBm

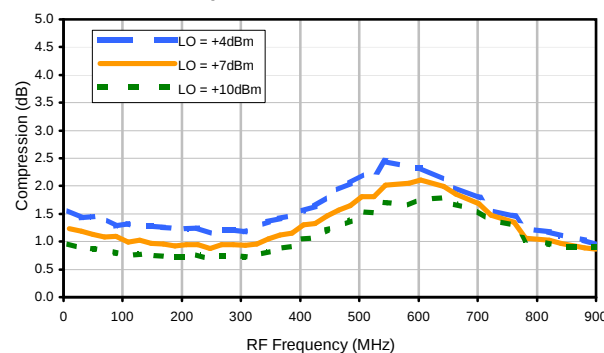

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




REV. X2
SCM-1NL+
100818
Page 1 of 3

Typical Performance Curves


LO-RF Isolation

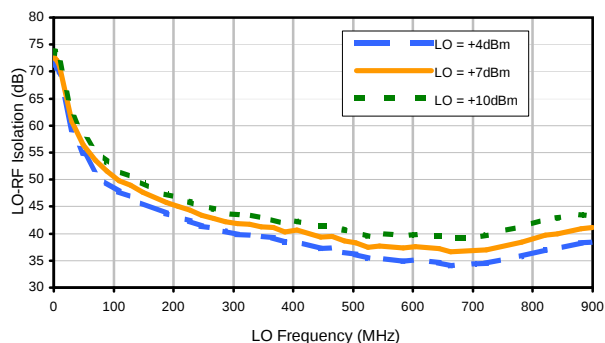


LO-IF Isolation

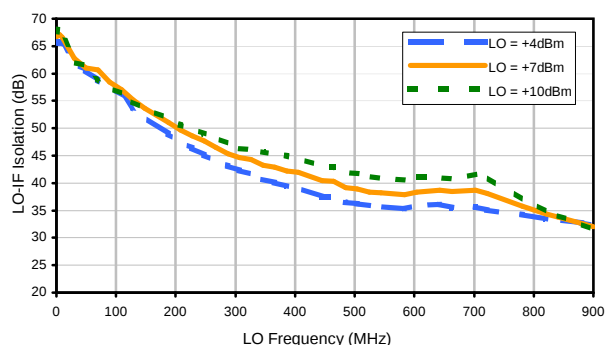


RF-IF Isolation

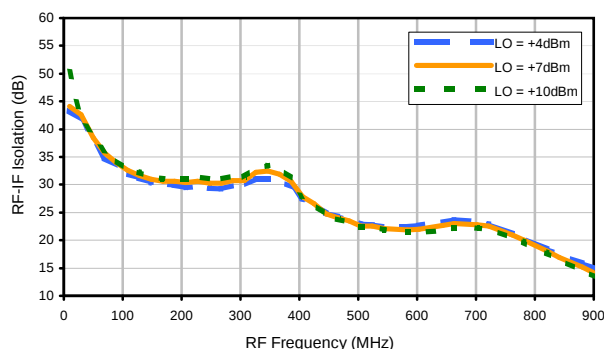


RF VSWR

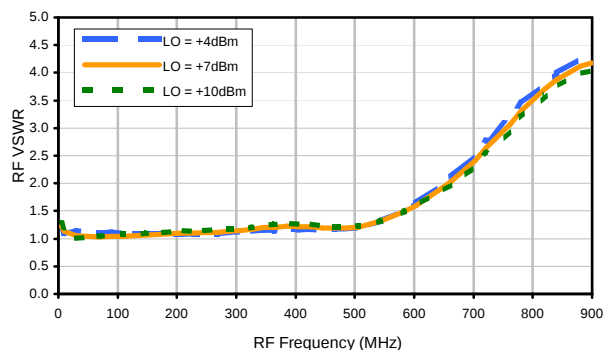

LO VSWR

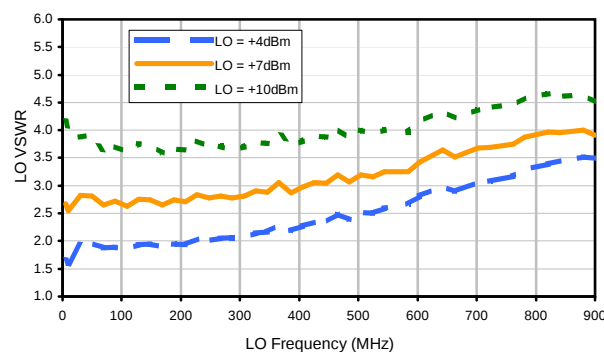

IF VSWR

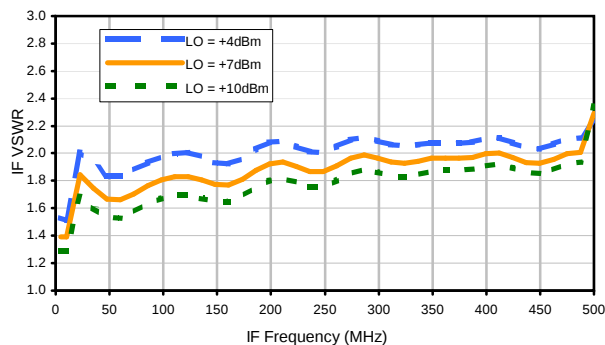

REV. X2

SCM-1NL+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	19	24	19	26	30	41	38	51	38	39
1	-	25	+0	34	11	40	16	38	35	66	49	39
2	>100	70	55	63	54	73	53	65	63	77	71	76
3	>100	67	61	67	61	75	56	72	64	>80	76	>80
4	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	79	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	66	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	68	>80
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -14.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -19.78 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	29	36	30	40	41	54	50	65	50	54
1	-	26	+0	35	12	40	18	43	37	66	52	48
2	>100	51	49	59	49	54	51	54	70	67	63	70
3	>100	48	41	50	42	58	38	63	41	57	57	73
4	>100	62	70	64	64	63	61	67	58	70	70	81
5	>100	70	68	69	54	66	52	70	54	64	62	79
6	>100	86	80	76	90	78	86	77	81	73	77	76
7	>100	>90	75	90	73	84	75	88	68	>90	64	74
8	>100	>90	>90	88	>90	80	>90	84	>90	85	86	>90
9	>100	>90	>90	>90	82	>90	77	90	82	71	83	>90
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	83	>90
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -4.00 dBm.

LO IN: 280.01 MHz; +7.00 dBm

IF OUT: 29.91 MHz; -9.68 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X2

SCM-1NL+

100818


Page 3 of 3

Case Style


YY

Outline Dimensions

YY101
YY109
YY161

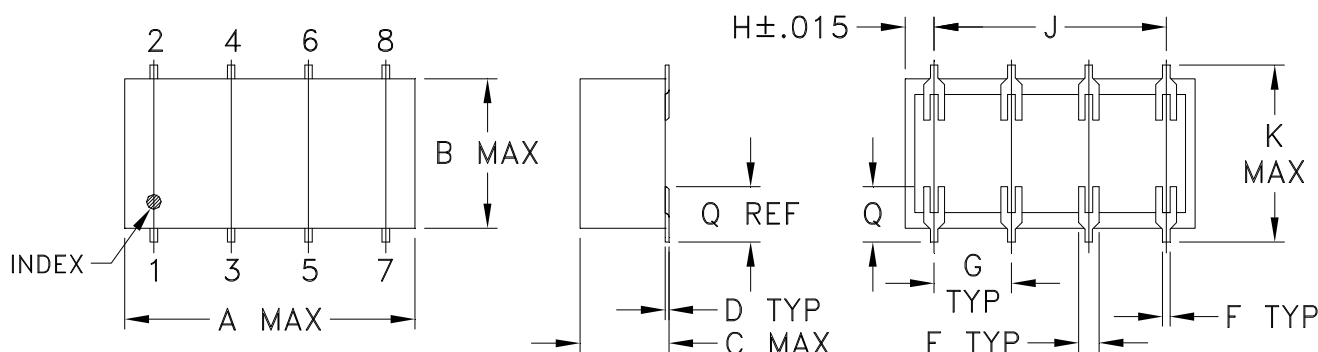

PCB Land Pattern

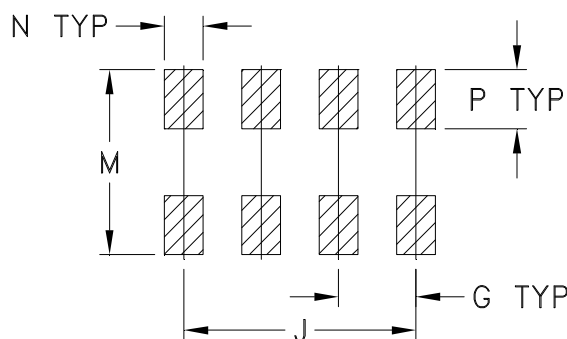

Suggested Layout
Tolerance to be within $\pm.002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAM S
YY101*			.20 (5.08)							.450 (11.43)	--	.470 (11.94)				1.6
YY109*	.75 (19.05)	.38 (9.65)	.20 (5.08)	.010 (0.25)	.050 (1.27)	.020 (0.51)	.200 (5.08)	.075 (1.91)	.600 (15.24)	.720 (18.29)	--	.740 (18.80)	.100 (2.54)	.150 (3.81)	.148 (3.76)	1.6
YY161			.28 (7.11)							.450 (11.43)	--	.470 (11.94)				1.6

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.
- Special Tolerances: Termination thickness $\pm .003$ inch.
- * Denotes: For SCM mixers, long termination version (case YY109) is available upon request, consult factory. To order short termination version (case YY101) add -NL suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F5

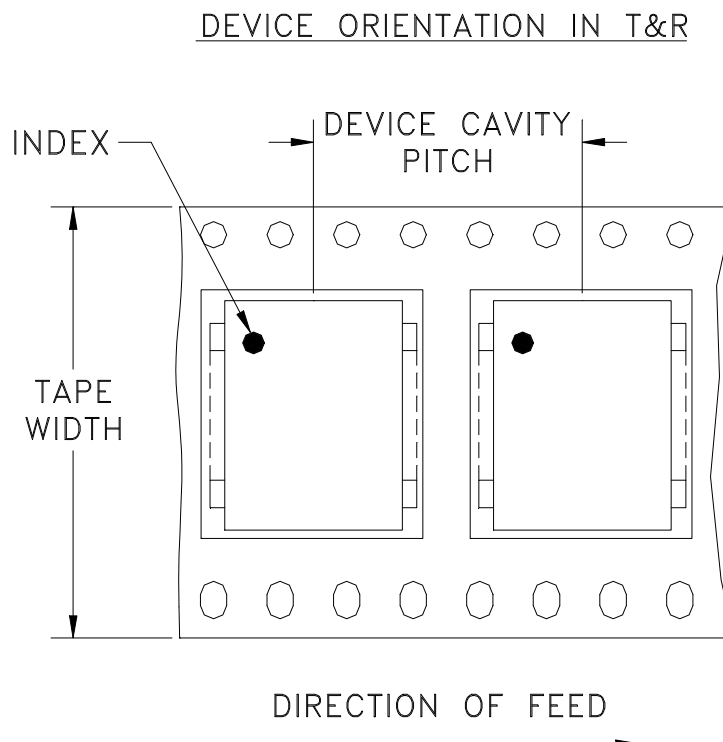

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR YY101 CASE STYLE, "d" PIN CONNECTION

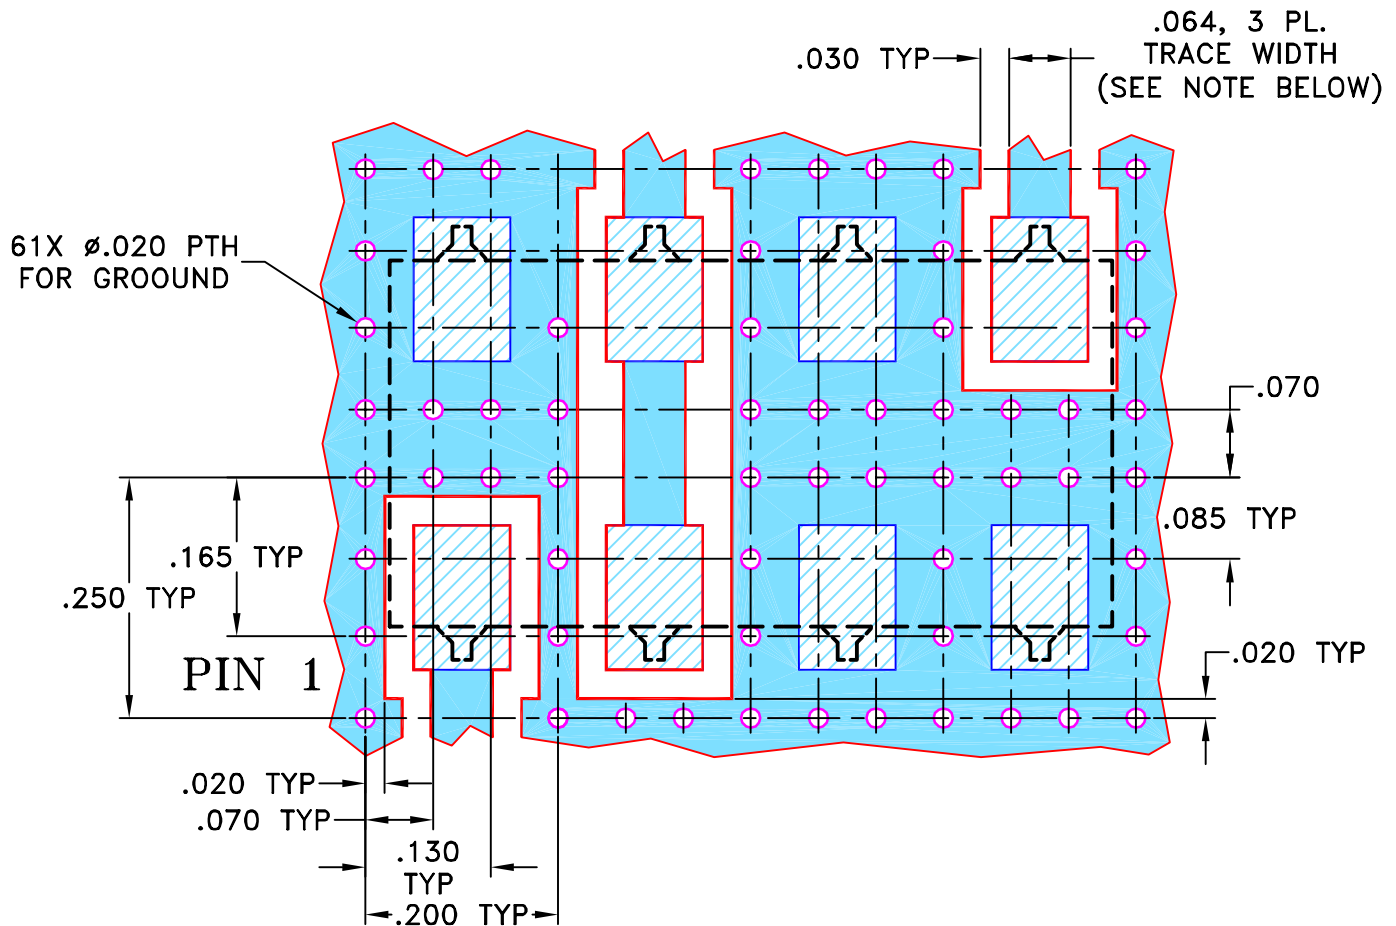

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.030'' \pm 0.002''$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL DECIMALS $\pm$
3 PL DECIMALS $\pm$.005
ANGLES $\pm$
FRACTIONS $\pm$

DRAWN

AV

07/22/02

CHECKED

WL

08/02/02

APPROVED

DJ

08/02/02



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, d, YY101, SCM, TB-170

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

Mini-Circuits®

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-084

REV:
A


FILE: 98PL084

SCALE: 5:1


SHEET: 1 OF 1

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

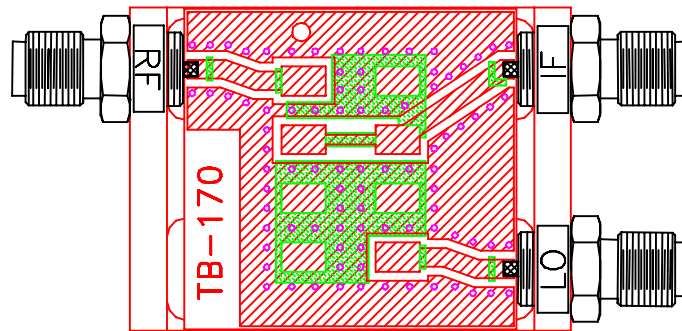

TB-170

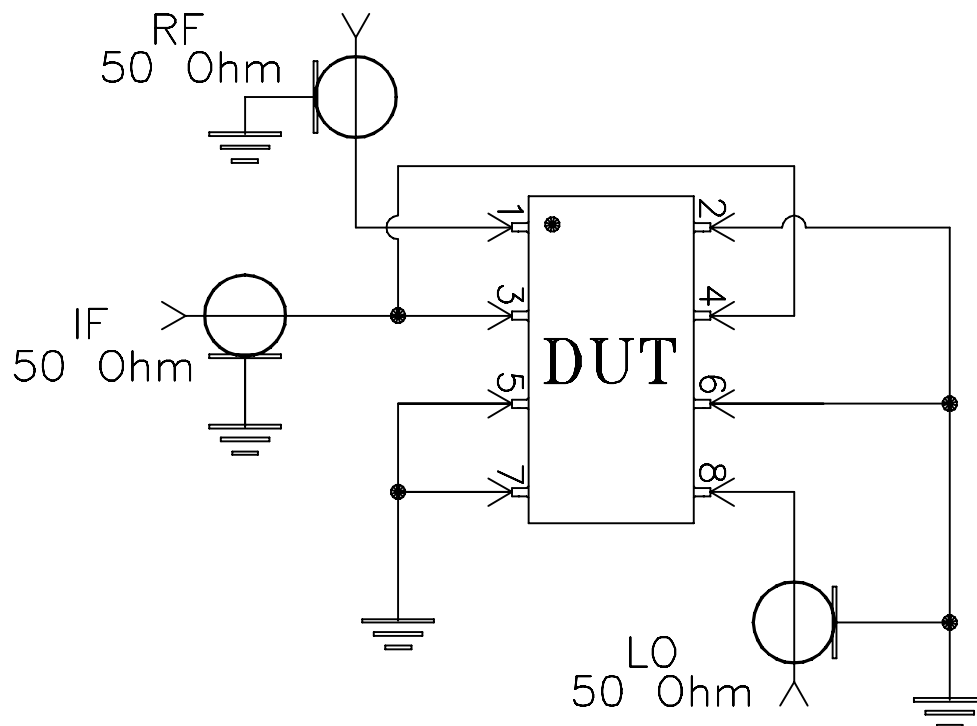

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215