

Surface Mount Frequency Mixer

Level 7 (LO Power +7 dBm) 2000 to 7000 MHz

SKY-7G+
SKY-7G



Generic photo used for illustration purposes only
CASE STYLE: BJ398

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	5
IF	7
GROUND	2,3,4,6,8

Features

- wide bandwidth, 2000 to 7000 MHz
- IF response, usable to 2000 MHz
- low conversion, 7.0 dB typ.
- IP3, 11 dBm typ.
- J-leads for strain relief


Applications

- line of sight links
- satellite up & down converters
- wireless LAN


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

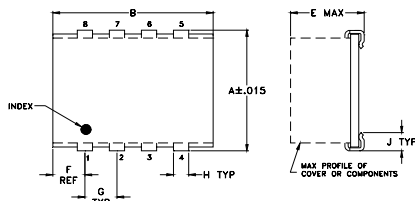

PCB Land Pattern




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.305	.390	—	.100	.105	.045	.100
7.75	9.91	—	2.54	2.67	1.14	2.54

H	J	K	L	wt
.047	.065	.065	.325	grams
1.19	1.65	1.65	8.26	0.20

Demo Board MCL P/N: TB-11 Suggested PCB Layout (PL-056)

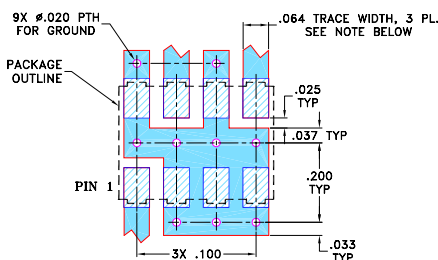

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_L-f_U	IF	Mid-Band		Total Range Max.	Typ.	Min.	Typ.	Min.	
		$\overline{X}$	σ						
2000-7000	DC-1000	7.0	0.10	9.8	28	15	20	7.0	11

1 dB COMP.: +1 dBm typ.







Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
2000.00	2030.00	8.06	34.92	14.09	2.69	6.20
2566.04	2596.04	6.24	25.63	14.30	1.98	3.67
2849.06	2879.06	6.39	22.59	12.59	1.85	2.81
3000.00	3030.00	6.57	22.41	12.50	1.89	2.56
3320.75	3350.75	7.01	23.29	12.87	1.87	2.58
3509.43	3539.43	7.20	24.83	13.12	1.84	2.69
4000.00	4030.00	7.11	30.95	17.74	1.80	2.80
4358.49	4388.49	7.50	29.44	20.61	2.69	2.70
4452.83	4482.83	7.49	28.13	21.25	2.91	2.80
4547.17	4517.17	7.60	27.76	21.90	3.18	2.80
5000.00	4970.00	7.81	27.00	26.15	3.36	3.38
5301.89	5271.89	8.17	26.79	27.76	3.16	4.09
5584.91	5554.91	8.34	26.63	28.42	2.78	4.59
5679.25	5649.25	8.80	27.15	28.49	2.71	4.65
5773.59	5743.59	8.85	27.89	28.51	2.62	5.02
6000.00	5970.00	8.03	26.63	28.32	2.42	4.94
6245.28	6215.28	7.45	24.75	28.56	2.16	5.04
6622.64	6592.64	7.37	21.88	28.81	1.83	4.95
6811.32	6781.32	7.26	20.79	29.46	1.64	5.24
7000.00	6970.00	7.21	19.91	30.33	1.43	5.06

Electrical Schematic

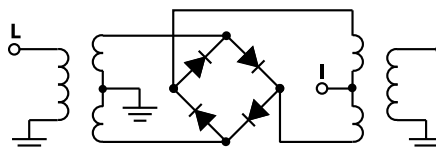

Performance Charts

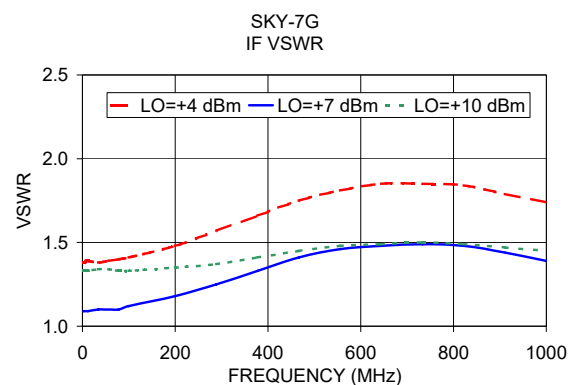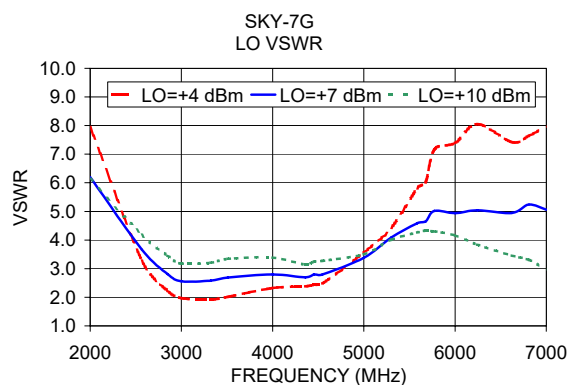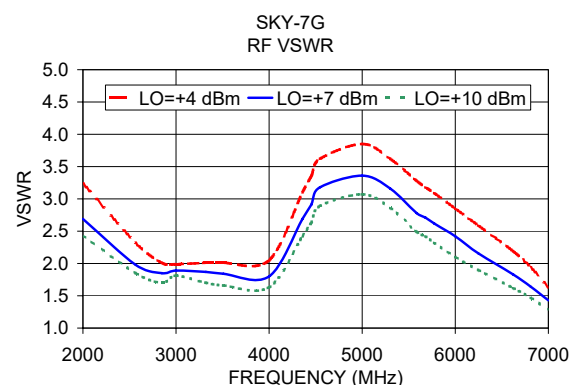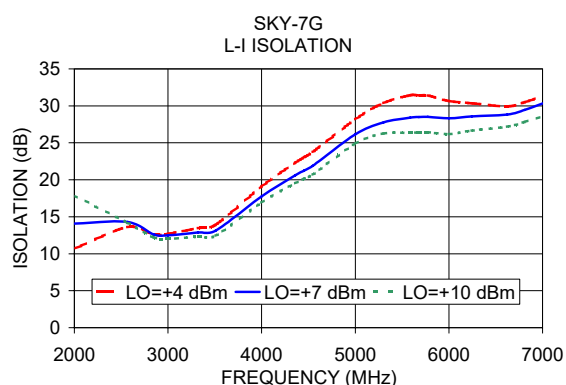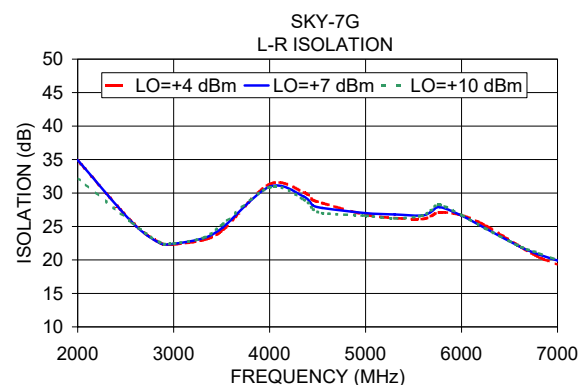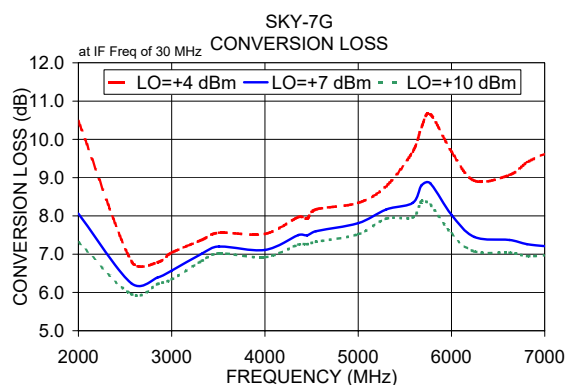

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SKY-7G+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
+4	+7	+10	+4	+7	+10	+4	+7	+10	+4	+7	+10			
1500.1	1530.1	10.12	8.16	7.46	1500.1	1530.1	8.38	10.75	9.60	1500.1	1530.1	1.08	1.45	1.25
1660.1	1690.1	8.95	7.48	6.98	1660.1	1690.1	11.66	10.77	10.22	1660.1	1690.1	1.27	1.56	1.51
1820.1	1850.1	7.89	7.13	6.78	1820.1	1850.1	11.50	10.56	10.73	1820.1	1850.1	1.44	1.42	1.41
1980.1	2010.1	7.15	6.60	6.40	1980.1	2010.1	12.77	13.53	12.18	1980.1	2010.1	1.49	1.42	1.33
2140.1	2170.1	6.61	6.15	5.99	2140.1	2170.1	11.35	13.27	11.69	2140.1	2170.1	1.52	1.33	1.24
2300.1	2330.1	6.65	6.29	6.15	2300.1	2330.1	12.93	14.63	13.08	2300.1	2330.1	1.27	1.05	0.99
2460.1	2490.1	6.82	6.54	6.43	2460.1	2490.1	11.91	10.90	9.90	2460.1	2490.1	1.07	0.89	0.83
2620.1	2650.1	6.82	6.54	6.43	2620.1	2650.1	10.77	11.34	11.29	2620.1	2650.1	1.02	0.83	0.78
2780.1	2810.1	7.05	6.68	6.51	2780.1	2810.1	9.44	9.17	9.19	2780.1	2810.1	0.78	0.74	0.75
2940.1	2970.1	7.22	6.74	6.48	2940.1	2970.1	8.99	8.26	7.95	2940.1	2970.1	0.54	0.54	0.62
3100.1	3130.1	6.96	6.60	6.36	3100.1	3130.1	7.32	7.31	7.19	3100.1	3130.1	0.62	0.48	0.47
3260.1	3290.1	6.87	6.50	6.28	3260.1	3290.1	7.49	8.53	9.41	3260.1	3290.1	0.63	0.42	0.39
3420.1	3450.1	6.67	6.31	6.10	3420.1	3450.1	6.58	7.72	8.80	3420.1	3450.1	0.71	0.39	0.32
3580.1	3610.1	6.36	6.03	5.85	3580.1	3610.1	6.53	7.93	9.28	3580.1	3610.1	0.74	0.40	0.33
3740.1	3770.1	6.49	6.13	5.94	3740.1	3770.1	6.92	8.59	10.07	3740.1	3770.1	0.60	0.23	0.16
3900.1	3930.1	6.75	6.29	6.04	3900.1	3930.1	9.46	12.04	13.89	3900.1	3930.1	0.83	0.45	0.35
4060.1	4090.1	7.81	7.30	6.89	4060.1	4090.1	8.59	10.73	12.29	4060.1	4090.1	0.36	0.27	0.31
4220.1	4250.1	7.66	7.34	7.04	4220.1	4250.1	6.15	7.67	9.63	4220.1	4250.1	0.35	0.05	0.06
4380.1	4410.1	7.39	7.21	7.06	4380.1	4410.1	7.11	10.69	14.48	4380.1	4410.1	0.53	0.10	-0.01
4540.1	4570.1	6.80	6.64	6.63	4540.1	4570.1	7.46	9.99	11.87	4540.1	4570.1	1.05	0.44	0.24
4700.1	4730.1	6.72	6.37	6.35	4700.1	4730.1	10.31	10.21	11.41	4700.1	4730.1	1.66	1.04	0.66
4860.1	4890.1	7.48	6.97	6.85	4860.1	4890.1	11.34	14.17	12.96	4860.1	4890.1	1.70	1.32	0.97
5020.1	5050.1	7.93	7.11	6.79	5020.1	5050.1	8.56	9.00	9.12	5020.1	5050.1	1.34	1.19	1.05
5180.1	5210.1	7.37	6.71	6.48	5180.1	5210.1	7.26	7.98	8.82	5180.1	5210.1	1.19	0.97	0.84
5340.1	5370.1	7.01	6.50	6.36	5340.1	5370.1	8.31	8.20	8.82	5340.1	5370.1	1.03	0.77	0.67
5500.1	5530.1	6.83	6.32	6.22	5500.1	5530.1	9.35	9.52	9.44	5500.1	5530.1	1.06	0.73	0.61
5660.1	5690.1	7.07	6.54	6.34	5660.1	5690.1	9.28	9.63	9.45	5660.1	5690.1	0.94	0.74	0.63
5820.1	5850.1	6.81	6.33	6.18	5820.1	5850.1	9.40	10.39	10.78	5820.1	5850.1	0.93	0.65	0.55
5980.1	6010.1	7.04	6.66	6.57	5980.1	6010.1	12.55	12.93	12.52	5980.1	6010.1	0.84	0.57	0.48
6140.1	6170.1	7.10	6.83	6.76	6140.1	6170.1	13.76	14.21	13.38	6140.1	6170.1	0.71	0.53	0.45
6300.1	6330.1	7.14	6.87	6.79	6300.1	6330.1	12.71	14.81	15.96	6300.1	6330.1	0.81	0.56	0.48
6460.1	6490.1	8.18	7.79	7.55	6460.1	6490.1	14.88	16.67	16.65	6460.1	6490.1	0.67	0.52	0.50
6620.1	6650.1	8.80	8.41	8.15	6620.1	6650.1	16.77	18.47	17.37	6620.1	6650.1	0.44	0.37	0.37
6780.1	6810.1	9.26	8.91	8.63	6780.1	6810.1	16.56	18.34	16.46	6780.1	6810.1	0.40	0.33	0.32
6940.1	6970.1	9.45	9.05	8.78	6940.1	6970.1	15.11	17.85	18.80	6940.1	6970.1	0.47	0.40	0.38
7120.1	7150.1	10.02	9.56	9.27	7120.1	7150.1	13.48	16.78	19.14	7120.1	7150.1	0.51	0.39	0.36
7280.1	7310.1	10.81	10.20	9.88	7280.1	7310.1	11.83	16.13	18.58	7280.1	7310.1	0.44	0.32	0.30
7460.1	7490.1	12.01	10.89	10.51	7460.1	7490.1	9.30	13.71	15.60	7460.1	7490.1	0.37	0.36	0.32
7620.1	7650.1	13.81	11.69	11.18	7620.1	7650.1	6.41	10.37	13.51	7620.1	7650.1	-0.22	0.52	0.52
7800.1	7830.1	15.57	12.21	11.62	7800.1	7830.1	3.01	8.02	11.03	7800.1	7830.1	-0.85	0.94	0.90

REV. X3

SKY-7G+

101031

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=4500MHz (dB)
		@LO (dBm) +7
2399.9	2100.1	11.38
2268.2	2231.8	9.71
2136.4	2363.6	8.37
2004.7	2495.3	7.39
1891.8	2608.2	6.89
1760.1	2739.9	6.49
1647.2	2852.8	6.25
1515.4	2984.6	6.15
1402.5	3097.5	5.95
1270.8	3229.2	6.02
1157.9	3342.1	6.38
1026.2	3473.8	6.61
913.3	3586.7	6.70
781.5	3718.5	6.77
668.6	3831.4	6.76
536.9	3963.1	6.86
424.0	4076.0	6.71
292.3	4207.7	6.48
179.4	4320.6	6.90
47.6	4452.4	7.06
73.5	4573.5	6.35
221.8	4721.8	5.88
348.9	4848.9	6.14
497.2	4997.2	6.62
624.3	5124.3	7.19
772.5	5272.5	7.69
899.6	5399.6	8.18
1047.9	5547.9	7.97
1175.0	5675.0	7.46
1323.3	5823.3	6.87
1450.4	5950.4	6.79
1598.6	6098.6	6.74
1725.7	6225.7	6.96
1874.0	6374.0	8.00
2001.1	6501.1	8.52
2149.4	6649.4	9.36
2276.5	6776.5	9.51
2424.7	6924.7	9.00
2551.8	7051.8	10.03
2700.1	7200.1	12.89

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1990MHz (dB)
		@LO (dBm) +7
10.1	2000.1	6.87
70.1	2060.1	6.31
130.1	2120.1	6.21
190.1	2180.1	6.19
250.1	2240.1	6.00
310.1	2300.1	6.08
370.1	2360.1	6.08
430.1	2420.1	6.19
490.1	2480.1	6.40
550.1	2540.1	6.75
610.1	2600.1	6.89
670.1	2660.1	7.05
730.1	2720.1	6.95
790.1	2780.1	7.22
850.1	2840.1	7.27
910.1	2900.1	7.23
970.1	2960.1	7.39
1030.1	3020.1	7.48
1090.1	3080.1	7.41
1150.1	3140.1	7.43
1210.1	3200.1	7.26
1270.1	3260.1	7.05
1330.1	3320.1	6.85
1390.1	3380.1	6.80
1470.1	3460.1	7.00
1530.1	3520.1	7.08
1610.1	3600.1	7.03
1670.1	3660.1	7.14
1750.1	3740.1	7.13
1810.1	3800.1	6.89
1890.1	3880.1	6.93
1950.1	3940.1	6.99
2030.1	4020.1	7.32
2090.1	4080.1	7.66
2170.1	4160.1	8.22
2230.1	4220.1	8.67
2310.1	4300.1	9.43
2370.1	4360.1	10.25
2450.1	4440.1	10.90
2510.1	4500.1	11.74

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=7010.1MHz (dB)
		@LO (dBm) +7
1810.0	5200.1	10.79
1769.6	5240.5	10.84
1729.1	5281.0	10.72
1688.7	5321.4	10.55
1648.2	5361.9	10.32
1607.8	5402.3	9.99
1567.3	5442.8	9.85
1526.9	5483.2	9.64
1486.4	5523.7	9.53
1446.0	5564.1	9.49
1405.5	5604.6	9.22
1365.1	5645.0	9.35
1324.6	5685.5	9.42
1284.2	5725.9	9.59
1243.7	5766.4	9.74
1203.3	5806.8	9.87
1162.8	5847.3	9.90
1122.4	5887.7	9.98
1081.9	5928.2	10.00
1021.2	5988.9	10.11
980.8	6029.3	10.08
920.1	6090.0	10.00
879.7	6130.4	9.98
819.0	6191.1	10.17
778.5	6231.6	10.12
717.9	6292.2	10.22
677.4	6332.7	10.13
616.7	6393.4	10.11
576.3	6433.8	10.09
515.6	6494.5	10.01
475.2	6534.9	9.79
414.5	6595.6	9.66
374.0	6636.1	9.52
313.4	6696.7	9.48
272.9	6737.2	9.36
212.2	6797.9	9.23
171.8	6838.3	9.18
111.1	6899.0	9.18
70.7	6939.4	9.08
10.0	7000.1	9.60

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
1530.1	32.46	28.97	27.19	10.70	13.43	16.38
1690.1	39.34	34.62	32.10	11.07	13.74	16.10
1850.1	45.50	45.74	39.57	11.60	13.40	14.40
2010.1	34.08	34.13	34.83	11.66	12.50	12.78
2170.1	31.15	31.06	31.30	11.02	11.51	11.69
2330.1	28.99	28.95	28.84	11.37	11.66	11.46
2490.1	28.15	28.08	28.16	11.85	11.81	11.68
2650.1	27.18	27.36	27.72	12.16	11.86	11.72
2810.1	27.46	27.98	28.11	12.70	12.48	11.92
2970.1	28.27	29.07	29.70	13.45	13.02	12.85
3130.1	29.71	30.91	31.48	14.64	14.27	13.68
3290.1	29.45	30.02	30.51	16.18	15.53	15.10
3450.1	31.69	30.86	30.47	17.94	17.03	16.63
3610.1	33.25	31.11	29.93	19.39	18.35	17.82
3770.1	30.81	29.21	28.23	21.01	19.80	19.10
3930.1	27.69	26.52	25.52	22.39	21.33	20.26
4090.1	29.07	27.59	26.03	23.78	22.59	21.32
4250.1	30.16	28.60	27.09	24.81	23.38	22.05
4410.1	30.36	29.64	28.25	25.62	24.02	22.51
4570.1	28.82	27.88	26.70	26.77	24.39	22.88
4730.1	27.55	26.08	24.53	27.42	24.68	22.92
4890.1	27.92	27.09	26.06	27.63	24.58	22.70
5050.1	29.05	28.42	27.83	28.21	24.37	22.42
5210.1	26.70	26.55	25.98	27.66	23.81	21.60
5370.1	24.02	24.30	23.95	26.51	23.25	20.99
5530.1	22.27	22.91	23.04	26.05	22.35	20.45
5690.1	20.57	21.61	22.44	24.76	21.66	20.05
5850.1	19.04	20.53	21.83	24.38	21.76	20.20
6010.1	18.46	20.06	21.55	24.67	22.70	21.51
6170.1	18.67	20.90	23.06	23.86	23.26	22.77
6330.1	18.19	20.54	22.81	23.89	23.92	23.56
6490.1	18.04	19.89	21.60	24.78	24.91	24.83
6650.1	19.02	20.86	22.46	26.40	26.73	26.66
6810.1	20.41	22.37	24.14	28.64	28.91	28.80
6970.1	21.51	23.16	24.84	31.68	31.43	31.29
7150.1	22.99	24.36	25.71	36.33	35.30	34.55
7310.1	24.57	25.70	26.76	42.31	39.36	37.37
7490.1	26.27	26.77	27.72	44.97	40.76	38.86
7650.1	26.60	27.00	27.93	39.54	37.40	36.42
7830.1	25.40	26.47	28.21	34.06	32.79	32.54

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
1500.1	1530.1	16.06	14.09	13.35
1660.1	1690.1	20.82	18.17	17.67
1820.1	1850.1	39.57	32.72	29.82
1980.1	2010.1	26.73	27.45	26.39
2140.1	2170.1	22.11	22.13	22.05
2300.1	2330.1	20.10	19.96	19.66
2460.1	2490.1	18.02	17.65	17.51
2620.1	2650.1	17.29	17.02	16.89
2780.1	2810.1	17.15	16.83	16.51
2940.1	2970.1	18.25	18.07	17.72
3100.1	3130.1	17.98	17.88	17.73
3260.1	3290.1	18.03	18.10	18.15
3420.1	3450.1	18.43	18.43	18.46
3580.1	3610.1	19.11	19.15	19.09
3740.1	3770.1	19.87	20.00	20.15
3900.1	3930.1	20.34	20.53	20.74
4060.1	4090.1	20.84	20.77	20.86
4220.1	4250.1	21.25	21.19	21.05
4380.1	4410.1	22.55	22.32	22.14
4540.1	4570.1	24.23	23.95	23.67
4700.1	4730.1	25.39	25.28	25.08
4860.1	4890.1	25.89	25.45	25.24
5020.1	5050.1	28.40	27.62	27.13
5180.1	5210.1	29.90	28.80	28.05
5340.1	5370.1	28.46	27.47	26.87
5500.1	5530.1	26.28	25.86	25.60
5660.1	5690.1	23.88	24.09	24.12
5820.1	5850.1	22.01	22.31	22.51
5980.1	6010.1	21.03	21.48	21.80
6140.1	6170.1	19.61	20.02	20.29
6300.1	6330.1	18.94	19.24	19.59
6460.1	6490.1	18.03	18.18	18.42
6620.1	6650.1	17.51	17.71	17.90
6780.1	6810.1	17.16	17.31	17.47
6940.1	6970.1	17.12	17.28	17.18
7120.1	7150.1	17.31	17.49	17.62
7280.1	7310.1	17.79	17.96	18.00
7460.1	7490.1	18.26	18.53	18.62
7620.1	7650.1	19.14	19.24	19.24
7800.1	7830.1	19.77	19.04	18.72

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=7000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
1500.1	1530.1	4.70	3.67	3.21	1530.1	8.60	6.26	5.52	10.0	1.14	1.34	1.50
1660.1	1690.1	4.33	3.45	3.04	1690.4	6.24	4.73	4.64	70.3	1.15	1.34	1.49
1820.1	1850.1	3.95	3.41	3.06	1850.6	4.59	3.90	4.18	130.6	1.13	1.31	1.47
1980.1	2010.1	3.57	3.16	2.87	2010.9	3.95	3.64	3.97	190.9	1.17	1.34	1.49
2140.1	2170.1	3.43	3.08	2.89	2171.1	3.45	3.21	3.56	231.1	1.15	1.29	1.44
2300.1	2330.1	3.12	2.87	2.71	2331.4	2.88	2.98	3.48	291.4	1.20	1.33	1.47
2460.1	2490.1	2.92	2.74	2.65	2491.6	2.57	2.90	3.48	331.6	1.19	1.30	1.44
2620.1	2650.1	2.77	2.56	2.46	2651.9	2.32	2.75	3.37	391.9	1.23	1.31	1.44
2780.1	2810.1	2.57	2.30	2.11	2812.1	2.27	2.85	3.53	432.1	1.24	1.30	1.41
2940.1	2970.1	2.67	2.36	2.14	2972.4	2.28	2.89	3.64	492.4	1.27	1.30	1.39
3100.1	3130.1	2.61	2.33	2.07	3132.7	2.21	2.90	3.62	532.6	1.29	1.29	1.36
3260.1	3290.1	2.23	2.02	1.85	3292.9	2.35	3.12	3.95	592.9	1.32	1.28	1.35
3420.1	3450.1	2.08	1.88	1.71	3453.2	2.41	3.14	3.93	633.1	1.33	1.27	1.31
3580.1	3610.1	1.92	1.69	1.52	3613.4	2.63	3.33	4.15	693.4	1.39	1.29	1.30
3740.1	3770.1	1.73	1.50	1.34	3773.7	2.72	3.35	4.12	733.6	1.40	1.28	1.27
3900.1	3930.1	1.69	1.51	1.38	3933.9	2.80	3.26	3.90	793.9	1.45	1.30	1.27
4060.1	4090.1	2.01	1.84	1.70	4094.2	3.02	3.39	3.96	834.1	1.46	1.30	1.24
4220.1	4250.1	1.99	1.82	1.68	4254.4	2.96	3.18	3.67	894.4	1.46	1.27	1.18
4380.1	4410.1	1.74	1.58	1.47	4414.7	3.10	3.08	3.43	934.6	1.49	1.28	1.16
4540.1	4570.1	1.69	1.46	1.37	4575.0	3.52	3.29	3.50	994.9	1.50	1.28	1.14
4700.1	4730.1	1.80	1.44	1.27	4735.2	3.80	3.36	3.39	1035.2	1.52	1.29	1.14
4860.1	4890.1	2.20	1.91	1.76	4895.5	4.00	3.35	3.25	1095.5	1.55	1.32	1.17
5020.1	5050.1	2.59	2.27	2.04	5055.7	4.26	3.35	3.09	1135.7	1.56	1.33	1.20
5180.1	5210.1	2.36	2.07	1.89	5216.0	4.22	3.13	2.70	1196.0	1.61	1.41	1.31
5340.1	5370.1	1.96	1.70	1.53	5376.2	4.12	2.91	2.37	1236.2	1.64	1.47	1.40
5500.1	5530.1	1.88	1.58	1.38	5536.5	3.78	2.52	1.92	1296.5	1.65	1.53	1.48
5660.1	5690.1	1.75	1.54	1.38	5696.7	3.27	2.13	1.56	1336.7	1.69	1.59	1.56
5820.1	5850.1	1.66	1.50	1.39	5857.0	2.77	1.83	1.35	1397.0	1.80	1.74	1.73
5980.1	6010.1	1.66	1.55	1.47	6017.3	2.25	1.62	1.42	1437.2	1.85	1.82	1.83
6140.1	6170.1	1.68	1.60	1.53	6177.5	1.82	1.60	1.71	1497.5	2.03	2.03	2.04
6300.1	6330.1	1.83	1.73	1.64	6337.8	1.62	1.75	2.06	1537.7	2.13	2.15	2.18
6460.1	6490.1	2.15	2.07	1.97	6498.0	1.67	2.04	2.48	1598.0	2.26	2.29	2.32
6620.1	6650.1	2.62	2.55	2.46	6658.3	1.83	2.31	2.82	1638.2	2.41	2.46	2.49
6780.1	6810.1	3.07	3.00	2.91	6818.5	2.22	2.80	3.43	1698.5	2.49	2.53	2.55
6940.1	6970.1	3.82	3.73	3.63	6978.8	2.62	3.17	3.80	1738.7	2.65	2.71	2.73
7120.1	7150.1	4.30	4.15	4.01	7139.0	3.34	3.82	4.48	1799.0	2.74	2.77	2.78
7280.1	7310.1	4.18	3.96	3.79	7299.3	4.40	4.68	5.33	1839.2	2.82	2.86	2.87
7460.1	7490.1	4.47	4.09	3.86	7459.6	6.05	5.72	6.15	1899.5	2.91	2.92	2.92
7620.1	7650.1	4.47	3.85	3.57	7619.8	8.64	7.47	7.63	1939.7	2.96	2.98	2.96
7800.1	7830.1	3.80	3.21	3.00	7800.1	11.93	9.53	9.04	2000.0	2.82	2.83	2.81

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+4	16	14	32	26	---	---	---	---	---
1	-	15	+0	32	22	39	38	51	---	---	---	---
2	>90	44	57	43	55	48	55	48	60	---	---	---
3	>90	>69	65	>69	59	>69	63	>69	>69	>69	---	---
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	---
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	---	---	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	---	---	---	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	---	---	---	---	>69	>69	>69	>69	>69	>69	>69	>69
9	---	---	---	---	---	>69	>69	>69	>69	>69	>69	>69
10	---	---	---	---	---	---	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 4500 MHz; -14.00 dBm.
LO IN: 4530 MHz; +7.00 dBm
IF OUT: 30 MHz; -21.04 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	25	26	41	44	---	---	---	---	---
1	-	15	+0	33	24	39	40	56	---	---	---	---
2	75	34	49	34	48	41	48	43	55	---	---	---
3	>90	58	45	57	43	53	46	62	57	77	---	---
4	>90	58	69	62	>79	53	65	56	66	58	>79	---
5	>90	>79	70	>79	73	77	57	70	64	69	76	76
6	---	---	>79	78	>79	>79	>79	66	79	77	>79	78
7	---	---	---	>79	>79	>79	>79	>79	75	>79	>79	>79
8	---	---	---	---	>79	>79	>79	>79	>79	>79	>79	>79
9	---	---	---	---	---	>79	>79	>79	>79	>79	>79	>79
10	---	---	---	---	---	---	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4500 MHz; -4.00 dBm.
LO IN: 4530 MHz; +7.00 dBm
IF OUT: 30 MHz; -11.13 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


SKY-7G+

Typical Performance Curves


Conversion Loss @ IF=30MHz

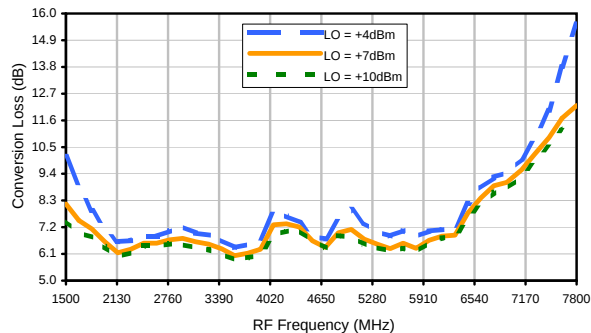


Conversion Loss vs. LO @ RF=4500MHz

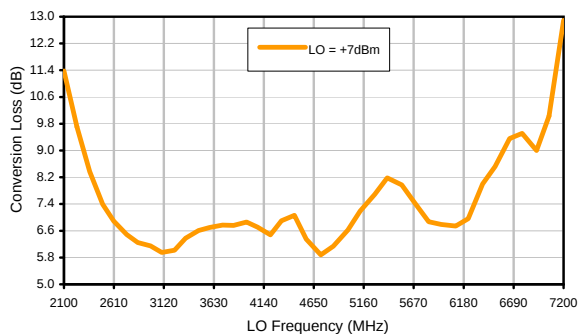


Conversion Loss vs. IF @ RF=4500MHz

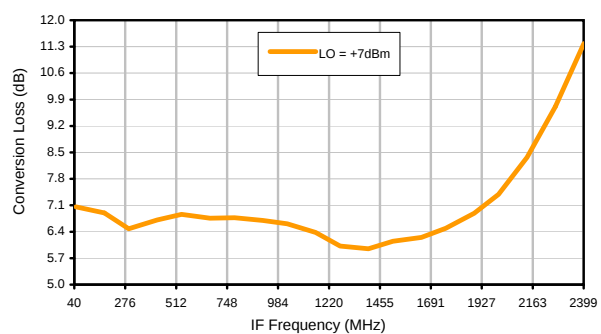


Conversion Loss vs. IF @ RF=1990MHz

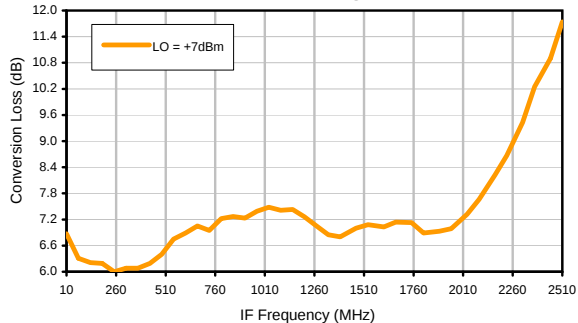


Conversion Loss vs. IF @ RF=7010.1MHz

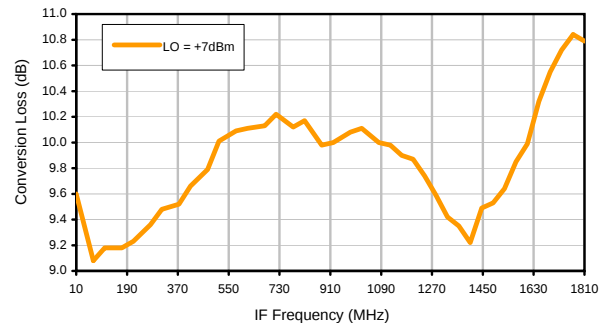

IP3 Input

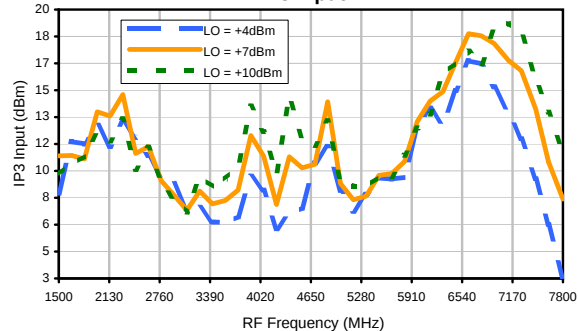

Compression @ RF IN=+1dBm

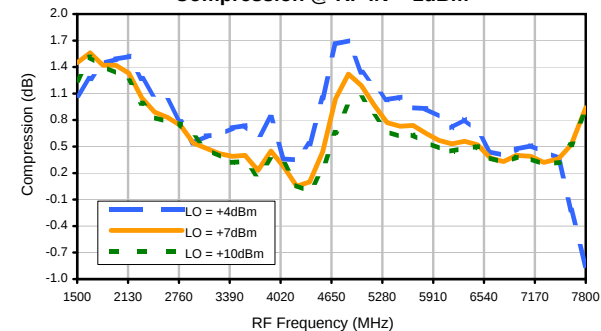

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




REV. X3
SKY-7G+
101031
Page 1 of 3

Frequency Mixer


SKY-7G+

Typical Performance Curves


LO-RF Isolation

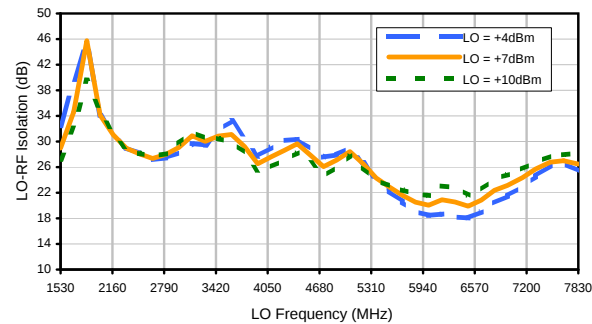


LO-IF Isolation

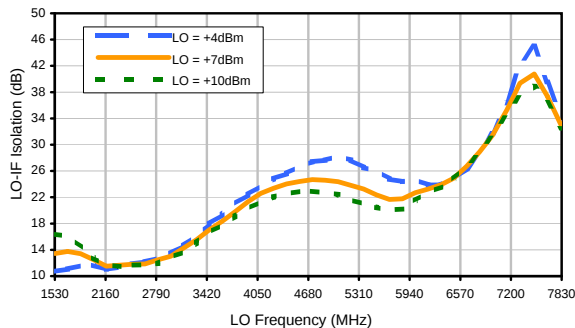


RF-IF Isolation

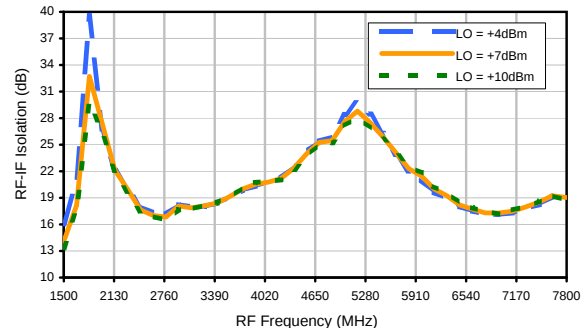


RF VSWR

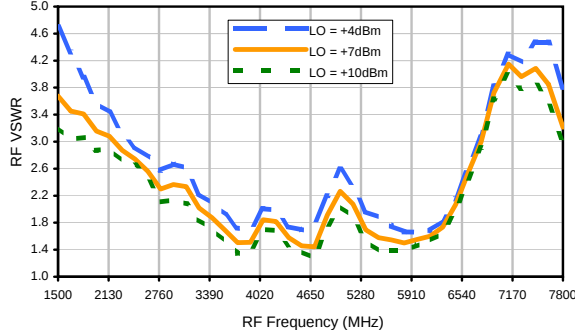

LO VSWR

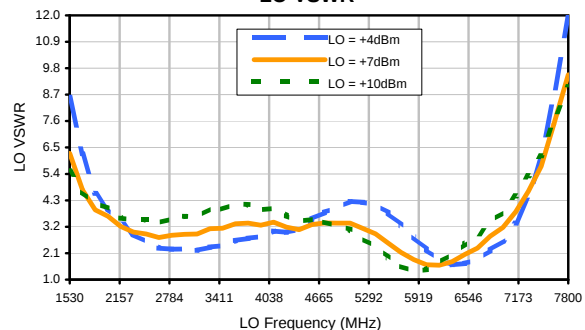

IF VSWR

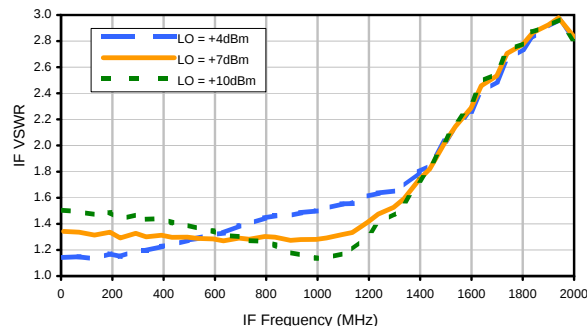

Frequency Mixer

SKY-7G+

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+4	16	14	32	26	---	---	---	---	---
1	-	15	+0	32	22	39	38	51	---	---	---	---
2	>90	44	57	43	55	48	55	48	60	---	---	---
3	>90	>69	65	>69	59	>69	63	>69	>69	>69	---	---
4	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	---
5	>90	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
6	---	---	>69	>69	>69	>69	>69	>69	>69	>69	>69	>69
7	---	---	---	>69	>69	>69	>69	>69	>69	>69	>69	>69
8	---	---	---	---	>69	>69	>69	>69	>69	>69	>69	>69
9	---	---	---	---	---	>69	>69	>69	>69	>69	>69	>69
10	---	---	---	---	---	---	>69	>69	>69	>69	>69	>69
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions: RF IN: 4500 MHz; -14.00 dBm.
LO IN: 4530 MHz; +7.00 dBm
IF OUT: 30 MHz; -21.04 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	6	25	26	41	44	---	---	---	---	---
1	-	15	+0	33	24	39	40	56	---	---	---	---
2	75	34	49	34	48	41	48	43	55	---	---	---
3	>90	58	45	57	43	53	46	62	57	77	---	---
4	>90	58	69	62	>79	53	65	56	66	58	>79	---
5	>90	>79	70	>79	73	77	57	70	64	69	76	76
6	---	---	>79	78	>79	>79	>79	66	79	77	>79	78
7	---	---	---	>79	>79	>79	>79	>79	75	>79	>79	>79
8	---	---	---	---	>79	>79	>79	>79	>79	>79	>79	>79
9	---	---	---	---	---	>79	>79	>79	>79	>79	>79	>79
10	---	---	---	---	---	---	>79	>79	>79	>79	>79	>79
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 4500 MHz; -4.00 dBm.
LO IN: 4530 MHz; +7.00 dBm
IF OUT: 30 MHz; -11.13 dBm



- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

BJ293

BJ398

PCB Land Pattern

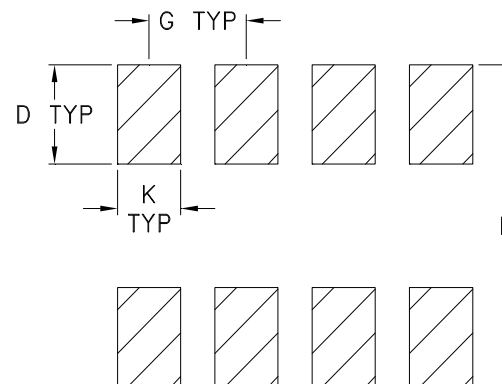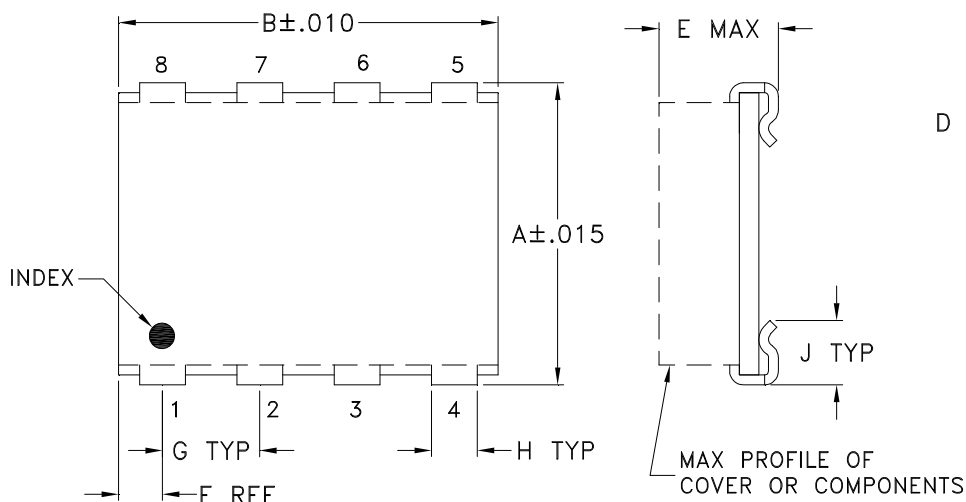

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT. GRAMS
BJ293	.395 (10.03)	.500 (12.70)	-- --	.100 (2.54)	.230 (5.84)	.100 (2.54)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.425 (10.80)	.80
BJ398	.305 (7.75)	.390 (9.91)	-- --	.100 (2.54)	.105 (2.67)	.045 (1.14)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.325 (8.26)	.20

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F29

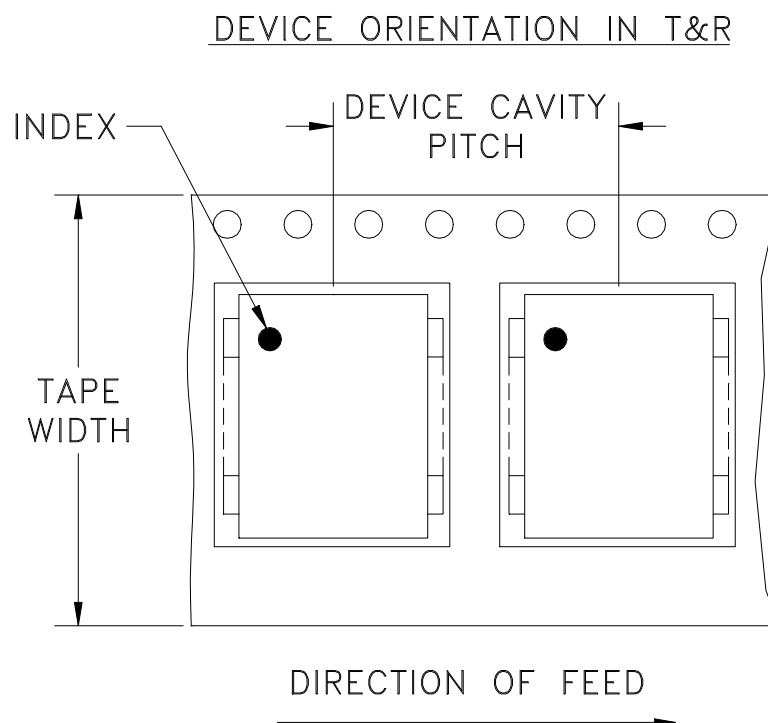

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	12	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M88233	NEW RELEASE	08/06/03	AV	WL
A	M102713	UPDATED NOTES, ADDED "...WITH SMOBC"	01/16/06	GT	IL

SUGGESTED MOUNTING CONFIGURATION
FOR BJ398 CASE STYLE, "je/hp" PIN CONNECTIONS

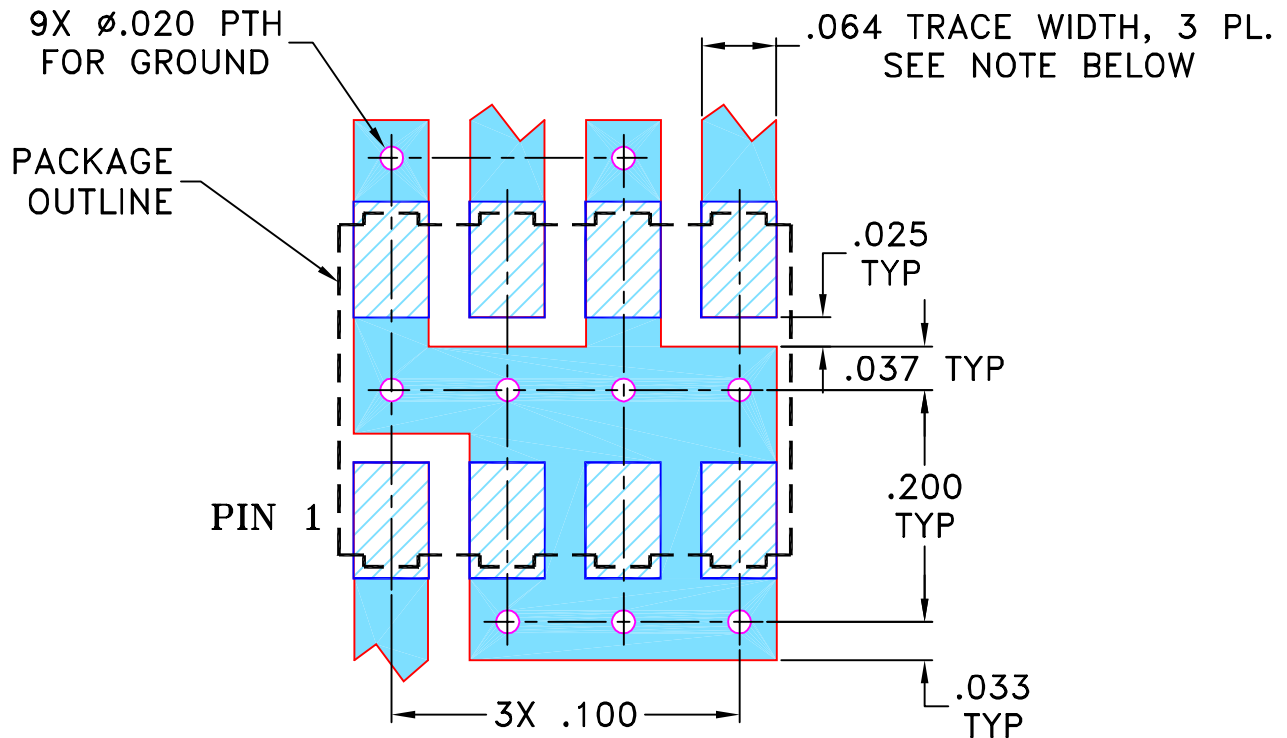NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
 2 PL DECIMALS $\pm$
 3 PL DECIMALS $\pm$.005
 ANGLES $\pm$
 FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

INITIALS

DATE

DRAWN

AV

07/28/03

CHECKED

IL

08/06/03

APPROVED

WL

08/06/03



Mini-Circuits® 13 Neptune Avenue
 Brooklyn NY 11235

PL, je/hp, BJ398, SKY, TB-11

 SIZE
 A

 CODE IDENT
 15542

 DRAWING NO:
 98-PL-056


 REV:
 A

FILE: 98PL056


SCALE: 6:1

SHEET: 1 OF 1

Evaluation Board and Circuit

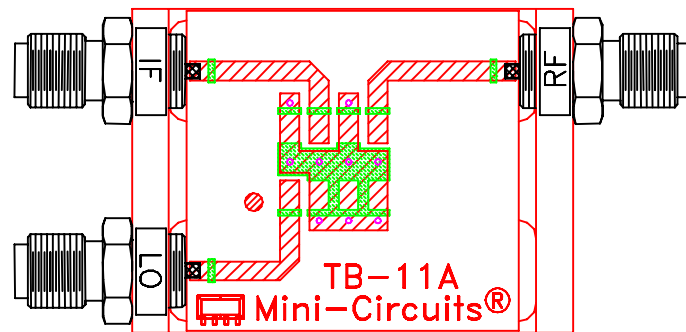

TB-11

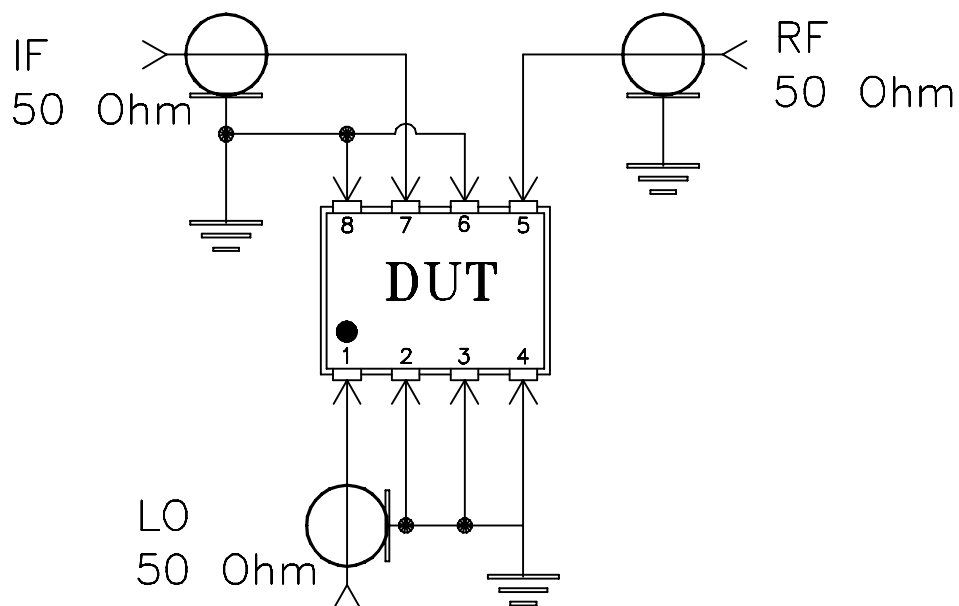

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215