

Non-Catalog Model

Frequency Mixer

SRA-2500SH

Level 17 (LO Power +17 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request. Pricing and delivery information can be supplied upon request.

Please click "Back", and then click "Contact Us" for Applications support.



CASE STYLE : A06

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	5		2500	MHz
	RF (fL to fU)	5		2500	MHz
	IF	1		1000	MHz
Conversion Loss	mid band		5.8	7.5	dB
	Total Range			10.5	dB
LO-RF Isolation	Low Range	25	40		dB
	Mid Range	28	37		dB
	Upper Range	18	30		dB
LO-IF Isolation	Low Range	35	50		dB
	Mid Range	25	42		dB
	Upper Range	17	25		dB
IP3 Input			+28		dBm
1 dB Comp. Input Power			+14		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	-

PIN CONNECTIONS	
LO	8
RF	1
IF	3, 4 ^
GROUND	2, 5, 6, 7

^ - pins must be connected together externally

Electrical Schematics

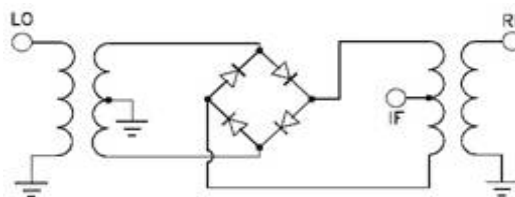

Frequency Mixer

SRA-2500SH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	6.27	5.73	5.68
90.1	120.1	6.68	6.10	6.04
170.1	200.1	6.84	6.25	6.19
250.1	280.1	7.14	6.54	6.39
330.1	360.1	7.29	6.61	6.39
410.1	440.1	7.42	6.60	6.31
490.1	520.1	7.67	6.74	6.43
570.1	600.1	8.08	6.84	6.48
650.1	680.1	8.31	6.83	6.45
730.1	760.1	8.64	7.25	6.77
890.1	920.1	8.06	7.21	6.81
970.1	1000.1	7.52	6.98	6.69
1050.1	1080.1	7.08	6.68	6.47
1130.1	1160.1	6.74	6.39	6.24
1210.1	1240.1	6.64	6.27	6.15
1290.1	1320.1	6.76	6.35	6.22
1370.1	1400.1	7.10	6.63	6.46
1450.1	1480.1	7.72	7.11	6.78
1530.1	1560.1	8.63	7.61	7.06
1610.1	1640.1	9.34	7.94	7.27
1690.1	1720.1	9.67	8.16	7.40
1770.1	1800.1	9.48	8.06	7.42
1850.1	1880.1	9.45	8.11	7.54
1930.1	1960.1	9.53	8.25	7.74
2010.1	2040.1	9.69	8.57	8.05
2090.1	2120.1	9.80	8.76	8.30
2170.1	2200.1	9.60	8.69	8.24
2250.1	2280.1	9.20	8.39	7.99
2310.1	2340.1	9.03	8.34	8.00
2390.1	2420.1	9.16	8.32	8.00
2450.1	2480.1	9.25	8.25	7.90
2530.1	2560.1	9.60	8.45	8.01
2590.1	2620.1	9.99	8.76	8.26
2670.1	2700.1	10.40	8.94	8.37
2730.1	2760.1	10.49	9.01	8.42
2810.1	2840.1	10.93	9.35	8.73
2870.1	2900.1	11.88	9.84	9.07
2950.1	2980.1	12.52	10.20	9.41
3010.1	3040.1	12.86	10.48	9.81

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	29.29	31.68	33.14
90.1	120.1	25.79	27.56	31.60
170.1	200.1	25.95	26.61	26.46
250.1	280.1	24.05	24.48	25.19
330.1	360.1	22.43	24.45	25.94
410.1	440.1	24.33	24.41	27.60
490.1	520.1	23.70	27.10	30.94
570.1	600.1	23.04	26.35	34.81
650.1	680.1	22.29	27.25	34.26
730.1	760.1	22.20	31.90	31.11
890.1	920.1	21.90	24.21	26.35
970.1	1000.1	22.31	24.71	24.97
1050.1	1080.1	23.51	24.95	27.17
1130.1	1160.1	23.81	25.46	28.83
1210.1	1240.1	22.49	26.24	27.71
1290.1	1320.1	20.53	27.29	27.46
1370.1	1400.1	19.65	28.29	29.40
1450.1	1480.1	19.67	27.88	28.51
1530.1	1560.1	20.99	29.25	27.95
1610.1	1640.1	22.63	28.06	27.59
1690.1	1720.1	23.08	25.84	30.94
1770.1	1800.1	23.14	24.39	24.86
1850.1	1880.1	21.82	24.22	25.10
1930.1	1960.1	23.36	25.78	27.46
2010.1	2040.1	24.83	25.59	30.38
2090.1	2120.1	23.36	26.74	29.47
2170.1	2200.1	22.23	26.84	29.32
2250.1	2280.1	22.07	25.14	27.27
2310.1	2340.1	21.91	24.07	22.92
2390.1	2420.1	20.79	24.20	21.95
2450.1	2480.1	20.35	23.34	21.67
2530.1	2560.1	21.40	22.89	23.06
2590.1	2620.1	20.86	23.73	26.01
2670.1	2700.1	19.98	23.89	25.84
2730.1	2760.1	18.74	22.88	25.55
2810.1	2840.1	18.49	21.80	25.24
2870.1	2900.1	18.48	20.77	24.59
2950.1	2980.1	18.75	19.41	24.25
3010.1	3040.1	18.68	19.98	25.12

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	1.08	0.44	0.20
90.1	120.1	0.80	0.32	0.19
170.1	200.1	0.77	0.32	0.19
250.1	280.1	0.64	0.23	0.13
330.1	360.1	0.61	0.24	0.19
410.1	440.1	0.68	0.38	0.32
490.1	520.1	0.80	0.52	0.39
570.1	600.1	0.69	0.59	0.45
650.1	680.1	0.58	0.63	0.47
730.1	760.1	0.46	0.50	0.41
890.1	920.1	0.72	0.50	0.42
970.1	1000.1	0.79	0.46	0.38
1050.1	1080.1	0.89	0.44	0.34
1130.1	1160.1	1.11	0.43	0.29
1210.1	1240.1	1.23	0.44	0.24
1290.1	1320.1	1.23	0.48	0.27
1370.1	1400.1	1.25	0.62	0.39
1450.1	1480.1	1.24	0.77	0.51
1530.1	1560.1	0.94	0.76	0.56
1610.1	1640.1	0.58	0.68	0.55
1690.1	1720.1	0.58	0.66	0.56
1770.1	1800.1	0.95	0.85	0.59
1850.1	1880.1	1.03	0.85	0.58
1930.1	1960.1	1.04	0.85	0.56
2010.1	2040.1	0.89	0.74	0.50
2090.1	2120.1	0.89	0.67	0.51
2170.1	2200.1	1.14	0.81	0.66
2250.1	2280.1	1.46	1.02	0.83
2310.1	2340.1	1.60	1.07	0.85
2390.1	2420.1	1.76	1.20	0.92
2450.1	2480.1	1.86	1.35	0.95
2530.1	2560.1	1.79	1.33	0.89
2590.1	2620.1	1.77	1.23	0.84
2670.1	2700.1	1.86	1.29	0.86
2730.1	2760.1	1.98	1.36	0.85
2810.1	2840.1	2.04	1.52	0.86
2870.1	2900.1	1.89	1.70	0.91
2950.1	2980.1	1.79	1.88	0.98
3010.1	3040.1	1.87	1.83	0.92

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1250.1MHz (dB)
		@LO (dBm)
		+17
1240.0	10.1	9.18
1210.0	40.1	9.22
1180.0	70.1	9.29
1150.0	100.1	9.23
1120.0	130.1	9.10
1090.0	160.1	9.09
1060.0	190.1	8.98
1030.0	220.1	8.81
1000.0	250.1	8.74
970.0	280.1	8.66
940.0	310.1	8.53
910.0	340.1	8.41
880.0	370.1	8.23
850.0	400.1	8.25
820.0	430.1	8.18
790.0	460.1	8.08
760.0	490.1	8.04
730.0	520.1	8.03
700.0	550.1	7.96
670.0	580.1	7.88
640.0	610.1	7.90
610.0	640.1	7.87
580.0	670.1	7.75
550.0	700.1	7.56
520.0	730.1	7.50
490.0	760.1	7.29
460.0	790.1	7.05
430.0	820.1	6.93
390.0	860.1	6.58
360.0	890.1	6.44
320.0	930.1	6.33
290.0	960.1	6.26
250.0	1000.1	6.21
220.0	1030.1	6.17
180.0	1070.1	6.17
150.0	1100.1	6.19
110.0	1140.1	6.20
80.0	1170.1	6.17
40.0	1210.1	6.23
10.0	1240.1	6.39

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)
		@LO (dBm)
		+17
10.0	20.1	5.94
70.0	80.1	5.60
130.0	140.1	5.81
190.0	200.1	5.77
250.0	260.1	5.64
310.0	320.1	5.58
370.0	380.1	5.42
430.0	440.1	5.64
490.0	500.1	5.61
550.0	560.1	5.70
610.0	620.1	5.67
670.0	680.1	5.80
730.0	740.1	5.97
790.0	800.1	6.11
850.0	860.1	6.31
910.0	920.1	6.40
970.0	980.1	6.58
1030.0	1040.1	6.61
1090.0	1100.1	6.77
1150.0	1160.1	6.91
1210.0	1220.1	7.13
1270.0	1280.1	7.38
1330.0	1340.1	7.47
1390.0	1400.1	7.80
1450.0	1460.1	7.83
1510.0	1520.1	7.94
1570.0	1580.1	8.08
1630.0	1640.1	8.08
1710.0	1720.1	8.44
1770.0	1780.1	8.66
1850.0	1860.1	8.93
1910.0	1920.1	9.16
1990.0	2000.1	9.55
2050.0	2060.1	9.71
2130.0	2140.1	9.65
2190.0	2200.1	9.81
2270.0	2280.1	9.86
2330.0	2340.1	9.89
2410.0	2420.1	10.09
2470.0	2480.1	10.37

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2500.1001MHz (dB)
		@LO (dBm)
		+17
830.0	1670.1	10.13
810.0	1690.1	10.09
790.0	1710.1	9.95
770.0	1730.1	9.82
750.0	1750.1	9.65
730.0	1770.1	9.50
710.0	1790.1	9.44
690.0	1810.1	9.34
670.0	1830.1	9.22
650.0	1850.1	9.10
630.0	1870.1	8.99
610.0	1890.1	8.91
590.0	1910.1	8.88
570.0	1930.1	8.85
550.0	1950.1	8.80
530.0	1970.1	8.79
510.0	1990.1	8.75
490.0	2010.1	8.72
470.0	2030.1	8.68
450.0	2050.1	8.69
430.0	2070.1	8.66
410.0	2090.1	8.63
390.0	2110.1	8.57
370.0	2130.1	8.49
350.0	2150.1	8.43
330.0	2170.1	8.38
310.0	2190.1	8.39
290.0	2210.1	8.37
270.0	2230.1	8.34
250.0	2250.1	8.29
230.0	2270.1	8.29
210.0	2290.1	8.28
190.0	2310.1	8.25
170.0	2330.1	8.24
150.0	2350.1	8.23
130.0	2370.1	8.26
90.0	2410.1	8.24
70.0	2430.1	8.24
30.0	2470.1	8.34
10.0	2490.1	8.57

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
40.1	38.72	41.17	43.00	45.40	48.48	51.25
120.1	39.53	42.59	44.42	45.83	48.46	50.50
200.1	40.08	43.18	44.19	46.04	48.14	49.82
280.1	40.35	43.35	43.17	48.09	49.23	48.84
360.1	40.91	44.16	43.52	52.35	50.29	48.30
440.1	41.33	45.69	44.72	55.62	50.09	47.47
520.1	41.08	47.28	45.16	54.07	50.80	45.03
600.1	40.90	49.79	49.14	51.96	49.67	43.08
680.1	40.13	51.48	50.72	48.94	46.98	39.93
760.1	39.59	49.54	50.52	46.61	41.11	36.41
920.1	39.07	44.85	43.89	50.90	39.39	33.69
1000.1	37.93	43.40	44.74	45.95	45.24	35.36
1080.1	37.15	42.04	44.50	41.18	47.86	36.39
1160.1	36.93	41.19	42.26	39.90	45.70	36.05
1240.1	35.92	39.69	40.29	41.14	40.93	34.62
1320.1	35.39	39.46	40.05	43.94	37.05	32.34
1400.1	35.19	40.04	42.00	43.77	34.59	31.65
1480.1	34.36	39.83	45.34	42.62	34.59	32.16
1560.1	32.73	37.76	43.44	41.71	35.20	32.75
1640.1	30.85	34.75	39.00	39.73	34.97	32.87
1720.1	29.44	32.74	35.77	38.85	34.94	32.87
1800.1	28.51	31.66	34.64	37.52	34.52	32.67
1880.1	28.13	31.12	34.21	35.84	33.34	31.75
1960.1	27.89	30.76	33.31	35.07	32.96	31.28
2040.1	27.24	29.90	31.86	34.17	32.56	30.77
2120.1	26.37	28.29	30.08	32.71	31.11	29.83
2200.1	25.86	27.36	28.95	31.36	30.06	29.15
2280.1	25.78	27.11	28.43	30.59	29.33	28.36
2340.1	25.57	26.97	28.12	30.27	29.32	28.25
2420.1	25.56	26.84	28.01	30.39	29.65	28.63
2480.1	25.96	27.19	28.49	30.52	30.23	29.16
2560.1	24.01	25.97	28.16	29.58	30.51	29.78
2620.1	22.66	24.54	27.05	29.42	30.93	30.48
2700.1	22.07	23.88	26.41	30.05	32.21	31.69
2760.1	22.04	23.89	26.52	30.83	33.48	32.49
2840.1	21.97	24.04	26.80	31.28	34.79	33.52
2900.1	21.52	23.49	26.35	30.94	35.48	34.91
2980.1	21.33	23.44	26.27	30.70	35.80	36.92
3040.1	21.60	23.83	26.63	30.82	36.10	37.92

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	37.84	38.14	38.58
90.1	120.1	39.16	38.95	38.58
170.1	200.1	40.25	40.13	39.87
250.1	280.1	41.37	41.31	43.25
330.1	360.1	43.42	46.05	47.51
410.1	440.1	47.01	50.53	49.75
490.1	520.1	45.24	49.85	53.75
570.1	600.1	41.03	43.78	45.41
650.1	680.1	38.65	40.63	40.92
730.1	760.1	37.28	39.01	38.45
890.1	920.1	38.95	39.79	39.23
970.1	1000.1	37.82	39.45	38.35
1050.1	1080.1	34.16	35.95	36.35
1130.1	1160.1	32.78	34.21	34.90
1210.1	1240.1	32.76	33.32	34.08
1290.1	1320.1	32.36	31.78	32.71
1370.1	1400.1	30.48	30.40	31.32
1450.1	1480.1	29.26	29.21	30.09
1530.1	1560.1	28.71	28.70	29.89
1610.1	1640.1	29.33	29.21	30.52
1690.1	1720.1	30.72	30.87	32.12
1770.1	1800.1	33.23	32.93	33.24
1850.1	1880.1	35.65	34.92	34.78
1930.1	1960.1	37.08	37.15	37.13
2010.1	2040.1	37.60	37.60	38.39
2090.1	2120.1	38.36	38.08	38.09
2170.1	2200.1	39.66	39.24	39.32
2250.1	2280.1	40.32	41.47	42.68
2310.1	2340.1	39.93	42.03	43.79
2390.1	2420.1	40.06	40.88	42.55
2450.1	2480.1	41.19	40.15	42.32
2530.1	2560.1	43.00	41.56	42.00
2590.1	2620.1	47.48	45.10	42.44
2670.1	2700.1	45.32	44.96	41.16
2730.1	2760.1	42.58	42.89	39.90
2810.1	2840.1	38.31	38.73	39.57
2870.1	2900.1	36.20	36.53	37.62
2950.1	2980.1	34.61	34.72	35.17
3010.1	3040.1	33.77	34.09	34.98

Frequency Mixer

SRA-2500SH

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=2500MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
10.1	40.1	1.82	1.65	1.42	40.1	1.41	1.38	2.59	10.0	1.52	1.13	1.09
90.1	120.1	1.76	1.59	1.38	120.1	1.38	1.21	1.79	50.0	1.57	1.19	1.07
170.1	200.1	1.79	1.61	1.39	200.1	1.41	1.15	1.65	90.0	1.55	1.18	1.13
250.1	280.1	1.80	1.63	1.42	280.1	1.43	1.10	1.58	130.0	1.62	1.26	1.16
330.1	360.1	1.85	1.69	1.48	360.1	1.52	1.04	1.50	170.0	1.67	1.31	1.20
410.1	440.1	1.97	1.79	1.59	440.1	1.63	1.01	1.44	210.0	1.74	1.40	1.29
490.1	520.1	2.19	1.97	1.77	520.1	1.77	1.07	1.37	250.0	1.83	1.48	1.34
570.1	600.1	2.42	2.15	1.93	600.1	1.86	1.13	1.32	290.0	1.88	1.54	1.40
650.1	680.1	2.50	2.23	2.02	680.1	1.96	1.20	1.28	330.0	2.01	1.66	1.50
730.1	760.1	2.52	2.30	2.11	760.1	2.03	1.26	1.27	370.0	2.06	1.71	1.54
890.1	920.1	2.19	2.07	1.93	920.1	2.10	1.36	1.35	450.0	2.27	1.89	1.69
970.1	1000.1	1.96	1.85	1.75	1000.1	2.09	1.40	1.41	490.0	2.39	2.02	1.80
1050.1	1080.1	1.76	1.63	1.55	1080.1	2.06	1.44	1.49	530.0	2.50	2.11	1.87
1130.1	1160.1	1.60	1.44	1.35	1160.1	2.02	1.46	1.55	570.0	2.55	2.17	1.94
1210.1	1240.1	1.50	1.30	1.20	1240.1	1.97	1.47	1.61	610.0	2.64	2.25	2.00
1290.1	1320.1	1.45	1.27	1.15	1320.1	1.89	1.47	1.67	650.0	2.66	2.27	2.03
1370.1	1400.1	1.53	1.38	1.28	1400.1	1.81	1.48	1.71	690.0	2.73	2.34	2.10
1450.1	1480.1	1.74	1.62	1.52	1480.1	1.74	1.49	1.74	730.0	2.73	2.35	2.12
1530.1	1560.1	2.04	1.89	1.76	1560.1	1.71	1.50	1.76	770.0	2.75	2.38	2.17
1610.1	1640.1	2.26	2.07	1.92	1640.1	1.70	1.51	1.77	810.0	2.72	2.37	2.17
1690.1	1720.1	2.48	2.25	2.11	1720.1	1.69	1.50	1.76	850.0	2.65	2.34	2.18
1770.1	1800.1	2.55	2.31	2.17	1800.1	1.65	1.49	1.76	890.0	2.61	2.33	2.20
1850.1	1880.1	2.61	2.36	2.24	1880.1	1.62	1.50	1.77	930.0	2.47	2.22	2.15
1930.1	1960.1	2.73	2.49	2.37	1960.1	1.62	1.52	1.78	970.0	2.43	2.23	2.20
2010.1	2040.1	2.84	2.63	2.51	2040.1	1.61	1.54	1.79	1010.0	2.30	2.16	2.20
2090.1	2120.1	2.84	2.65	2.54	2120.1	1.61	1.57	1.82	1050.0	2.20	2.13	2.24
2170.1	2200.1	2.77	2.59	2.49	2200.1	1.62	1.64	1.91	1090.0	2.10	2.10	2.29
2250.1	2280.1	2.70	2.53	2.42	2280.1	1.64	1.74	2.03	1130.0	1.96	2.06	2.31
2310.1	2340.1	2.66	2.49	2.39	2340.1	1.65	1.82	2.13	1170.0	1.87	2.03	2.34
2390.1	2420.1	2.53	2.31	2.17	2420.1	1.69	1.93	2.27	1210.0	1.79	2.06	2.44
2450.1	2480.1	2.49	2.21	2.05	2480.1	1.76	2.04	2.39	1250.0	1.68	2.09	2.42
2530.1	2560.1	2.50	2.20	2.01	2560.1	1.91	2.23	2.60	1290.0	1.70	2.12	2.59
2590.1	2620.1	2.49	2.17	1.99	2620.1	2.03	2.38	2.75	1330.0	1.72	2.22	2.72
2670.1	2700.1	2.50	2.16	1.98	2700.1	2.18	2.55	2.93	1370.0	1.76	2.30	2.84
2730.1	2760.1	2.44	2.14	1.98	2760.1	2.33	2.74	3.17	1430.0	1.95	2.52	3.08
2810.1	2840.1	2.32	2.10	2.00	2840.1	2.58	3.02	3.48	1470.0	2.09	2.63	3.19
2870.1	2900.1	2.31	2.14	2.09	2900.1	2.69	3.11	3.51	1530.0	2.40	2.92	3.44
2950.1	2980.1	2.21	2.17	2.22	2980.1	2.92	3.34	3.75	1570.0	2.62	3.11	3.58
3010.1	3040.1	2.22	2.30	2.42	3040.1	3.21	3.69	4.19	1630.0	3.01	3.43	3.84

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	21	18	29	21	31	33	35	36	56
1	-	30	+0	44	17	48	35	41	50	39	51	59
2	66	59	47	55	48	60	53	81	51	59	58	69
3	>90	72	74	61	61	61	63	71	72	70	78	73
4	>90	>83	>83	81	>83	82	>83	82	>83	>83	>83	>83
5	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
6	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
7	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
8	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
9	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

Test conditions:

RF IN: 1250 MHz; -1.00 dBm.

LO IN: 1280 MHz; +17.00 dBm

IF OUT: 30 MHz; -7.31 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	31	30	42	38	46	48	50	56	68
1	-	29	+0	51	18	53	39	47	58	47	50	69
2	46	49	36	48	37	53	45	61	44	54	55	56
3	72	69	55	57	40	58	44	69	54	58	67	54
4	>90	72	68	73	56	60	53	60	60	68	57	71
5	>90	74	76	74	64	67	70	67	65	75	72	71
6	>90	80	86	84	89	78	67	80	71	>93	89	80
7	>90	92	>93	84	90	79	80	73	74	76	76	81
8	>90	83	>93	86	89	85	88	80	80	76	75	80
9	>90	>93	>93	>93	>93	92	>93	87	>93	82	92	84
10	>90	>93	>93	>93	>93	>93	>93	92	92	85	84	82
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 1250 MHz; 9.00 dBm.

LO IN: 1280 MHz; +17.00 dBm

IF OUT: 30 MHz; 2.62 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.


3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Frequency Mixer


SRA-2500SH

Typical Performance Curves


Conversion Loss @ IF=30MHz

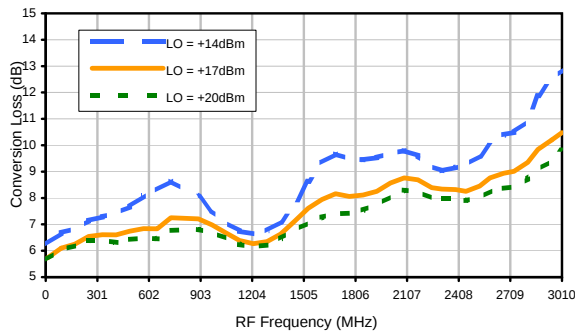


Conversion Loss vs. IF @ RF=1250.1MHz

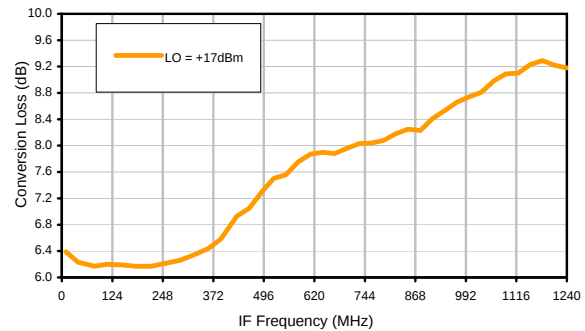


Conversion Loss vs. IF @ RF=10.1MHz

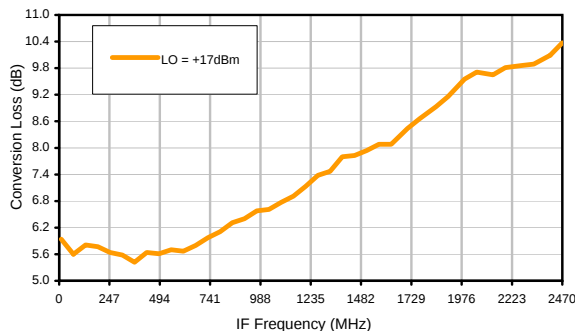


Conversion Loss vs. IF @ RF=2500.1001MHz

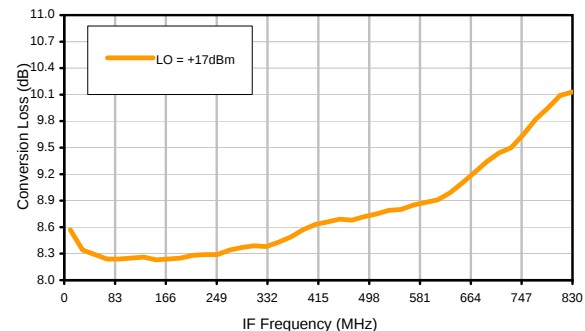

IP3 Input

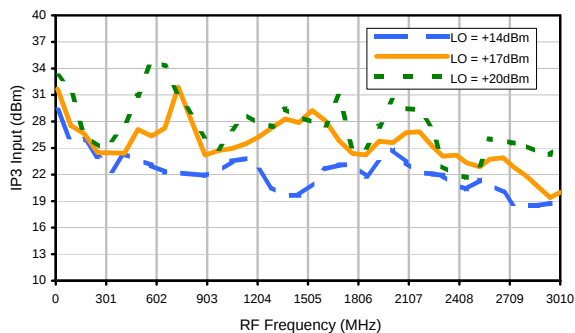


Compression @ RF IN=+14dBm

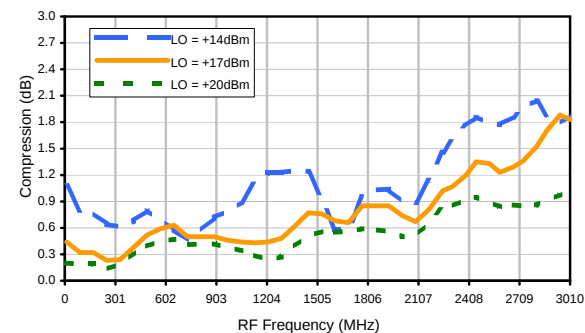

Frequency Mixer

SRA-2500SH

Typical Performance Curves

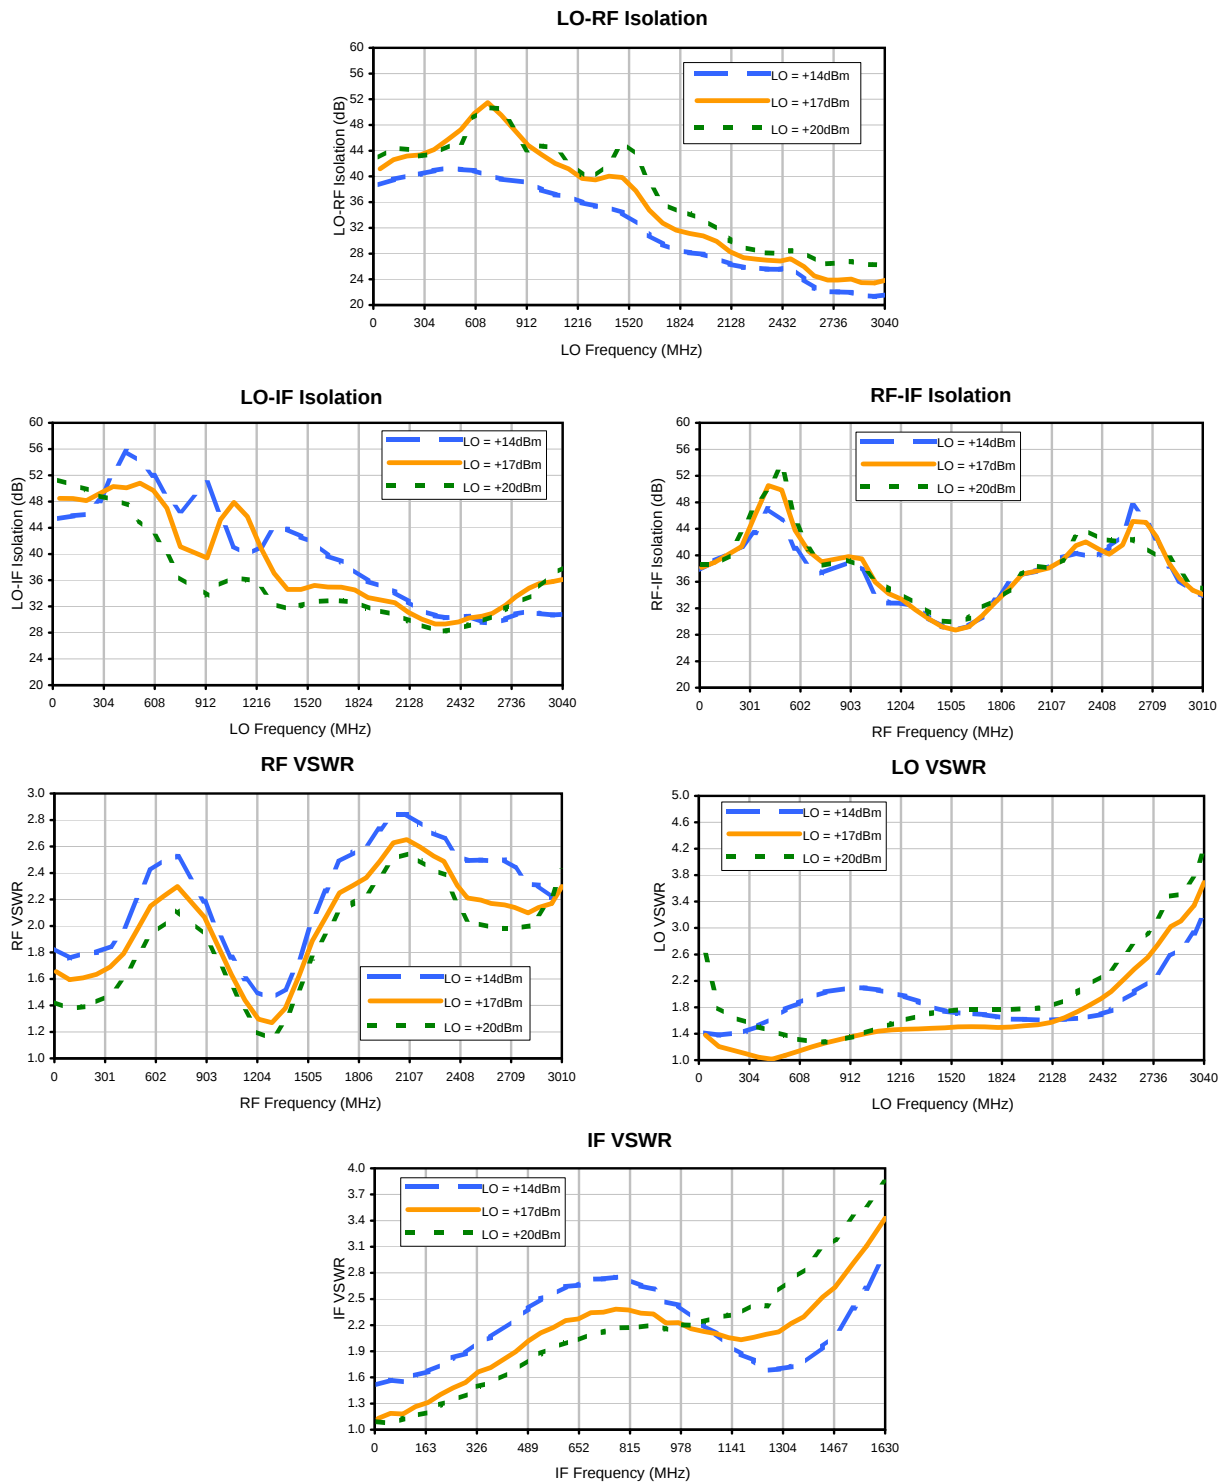

REV. X2
SRA-2500SH
101031
Page 2 of 3



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

minicircuits.com

Frequency Mixer

SRA-2500SH

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	15	21	18	29	21	31	33	35	36	56
1	-	30	+0	44	17	48	35	41	50	39	51	59
2	66	59	47	55	48	60	53	81	51	59	58	69
3	>90	72	74	61	61	61	63	71	72	70	78	73
4	>90	>83	>83	81	>83	82	>83	82	>83	>83	>83	>83
5	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
6	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
7	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
8	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
9	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83
10	>90	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83	>83

RF CAL 0 1 2 3 4 5 6 7 8 9 10

Test conditions: RF IN: 1250 MHz; -1.00 dBm.
LO IN: 1280 MHz; +17.00 dBm
IF OUT: 30 MHz; -7.31 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	31	30	42	38	46	48	50	56	68
1	-	29	+0	51	18	53	39	47	58	47	50	69
2	46	49	36	48	37	53	45	61	44	54	55	56
3	72	69	55	57	40	58	44	69	54	58	67	54
4	>90	72	68	73	56	60	53	60	60	68	57	71
5	>90	74	76	74	64	67	70	67	65	75	72	71
6	>90	80	86	84	89	78	67	80	71	>93	89	80
7	>90	92	>93	84	90	79	80	73	74	76	76	81
8	>90	83	>93	86	89	85	88	80	80	76	75	80
9	>90	>93	>93	>93	>93	92	>93	87	>93	82	92	84
10	>90	>93	>93	>93	>93	>93	>93	92	92	85	84	82

RF CAL 0 1 2 3 4 5 6 7 8 9 10


LO HARMONICS ORDER

Test conditions: RF IN: 1250 MHz; 9.00 dBm.
LO IN: 1280 MHz; +17.00 dBm
IF OUT: 30 MHz; 2.62 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

A01
A04
A05
A06

Outline Dimensions

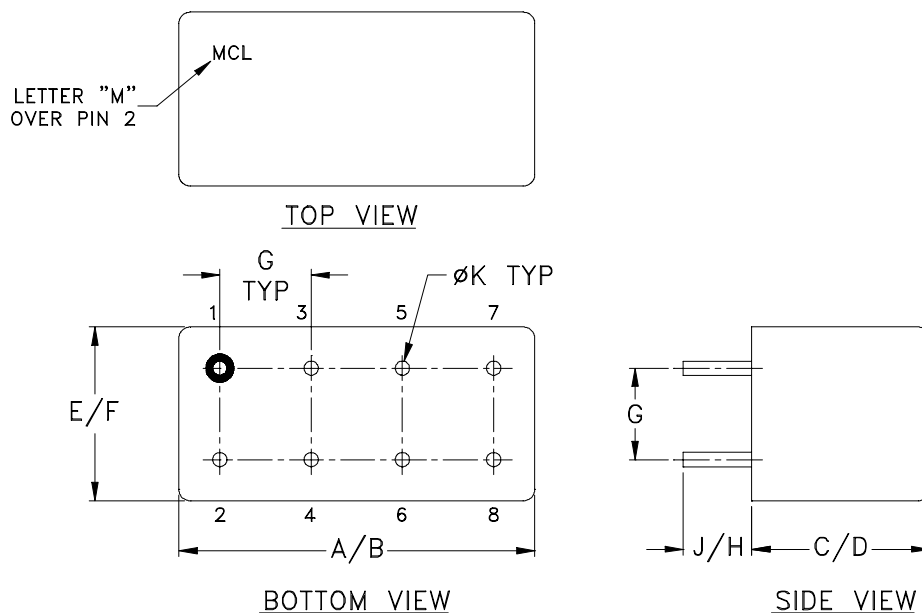

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



Environmental Specifications ENV01

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D