

Level 17 (LO Power +17 dBm) 5 to 1800 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections


LO	2
RF	1
IF	3
GROUND	4,5,6

Outline Drawing

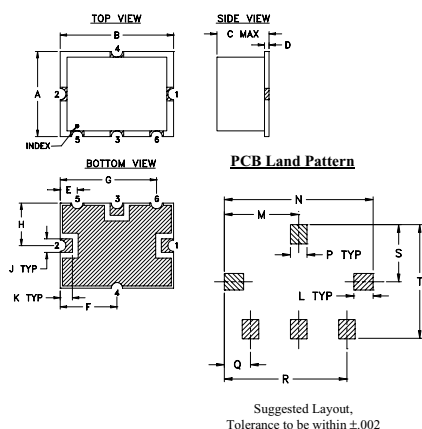

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12
Suggested PCB Layout (PL-079)

NOTE:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low conversion loss, 5.75 dB typ.
- excellent L-R isolation, 45 dB typ.; L-I, 50 dB typ.
- IF response to DC

Applications

- VHF/UHF TV



CASE STYLE: TTT167

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF	Mid-Band		Total Range		L	M	U				L	M	U				
		m	σ	Max.	Max.													
		f_L-f_U	$\overline{X}$	σ	Max.													
5-1800	10-1500*	5.75	.10	7.6	8.9	50	28	45	35	40	24	39	22	50	30	30	22	30

1 dB COMP: +14 dBm typ.

m=mid band [$2f_L$ to $f_U/2$]


*Conversion loss measured at IF frequency between 10 and 1300 MHz







L = low range [f_L to $10 f_L$]m= mid band [$2f_L$ to $f_U/2$]M = mid range [$10 f_L$ to $f_U/2$]U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
5.00	35.00	5.61	50.30	38.90	1.58	1.80
8.00	38.00	5.53	50.90	39.40	1.36	1.78
10.00	40.00	5.56	51.30	39.60	1.31	1.78
50.00	80.00	5.41	55.80	42.20	1.22	1.77
100.00	130.00	5.39	54.70	44.40	1.25	1.73
110.48	140.48	5.34	53.80	44.10	1.29	1.74
220.45	250.45	5.68	48.00	48.90	1.43	1.73
330.43	360.43	5.61	45.10	53.30	1.55	1.59
440.40	470.40	5.72	44.40	52.20	1.76	1.50
500.00	530.00	5.55	44.30	48.10	1.80	1.51
550.38	580.38	5.65	45.40	48.00	1.94	1.39
660.35	690.35	5.82	47.50	43.10	2.08	1.33
770.33	800.33	6.21	50.80	40.00	2.30	1.32
880.30	910.30	6.46	52.20	38.70	2.35	1.25
990.28	1020.28	6.72	53.70	37.60	2.52	1.22
1000.00	1030.00	6.57	52.40	37.70	2.61	1.21
1100.25	1130.25	6.39	46.80	36.10	2.52	1.23
1210.23	1240.23	6.72	42.30	33.40	2.43	1.24
1320.20	1350.20	6.96	38.90	31.20	2.40	1.25
1800.00	1830.00	7.39	32.00	30.20	2.30	1.88

Electrical Schematic

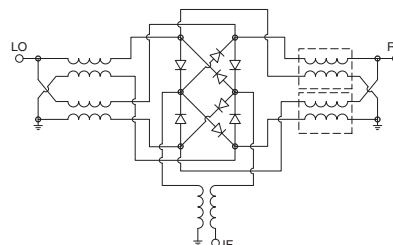

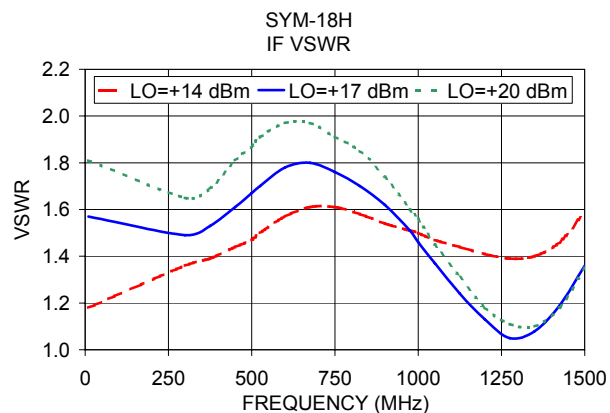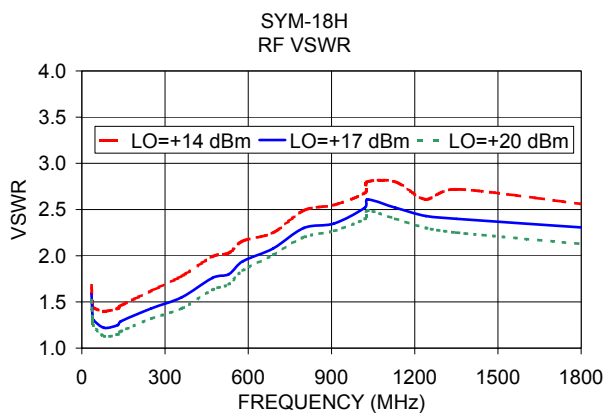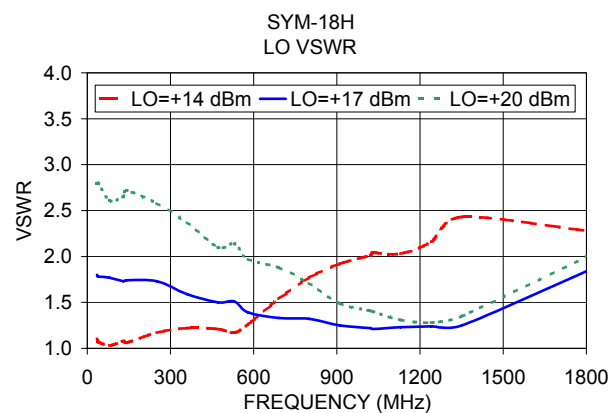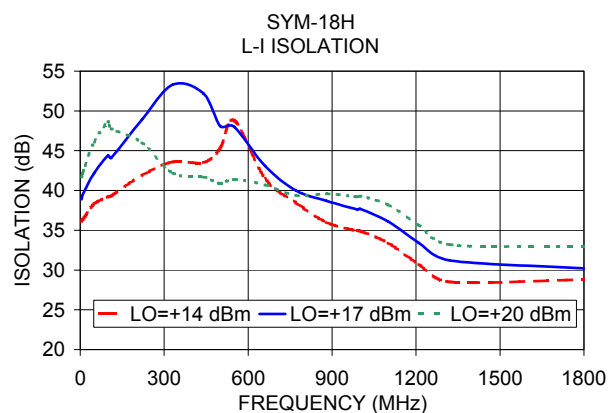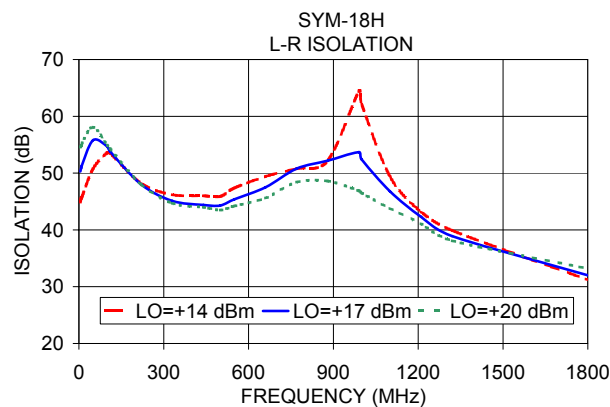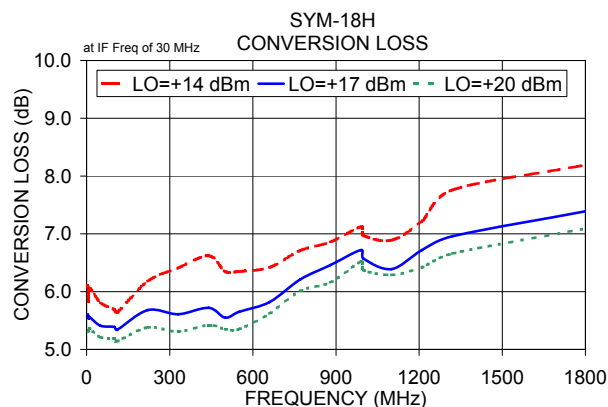

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

SYM-18H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
5.0	35.0	6.11	5.61	5.31
8.0	38.0	5.83	5.53	5.33
10.0	40.0	6.06	5.56	5.36
90.3	120.3	6.21	5.74	5.50
170.6	200.6	6.38	5.91	5.68
250.9	280.9	6.57	6.06	5.64
331.2	361.2	6.87	6.02	5.61
411.5	441.5	7.19	6.25	5.76
491.7	521.7	7.14	6.12	5.77
552.0	582.0	6.82	6.07	5.78
632.3	662.3	6.70	6.14	5.90
692.5	722.5	6.89	6.28	6.04
772.8	802.8	7.08	6.54	6.32
833.0	863.0	7.35	6.75	6.50
913.3	943.3	7.38	6.85	6.61
973.5	1003.5	7.55	6.86	6.61
1053.8	1083.8	7.53	6.87	6.63
1194.3	1224.3	7.77	6.99	6.72
1254.5	1284.5	8.00	7.02	6.72
1334.8	1364.8	7.98	7.07	6.79
1395.0	1425.0	8.25	7.19	6.84
1475.3	1505.3	8.19	7.23	6.89
1535.5	1565.5	8.33	7.25	6.91
1615.8	1645.8	8.53	7.43	7.07
1676.0	1706.0	8.78	7.62	7.23
1756.3	1786.3	9.02	7.88	7.53
1816.5	1846.5	9.24	8.16	7.74
1896.8	1926.8	9.61	8.51	8.04
1957.0	1987.0	9.68	8.61	8.16
2037.3	2067.3	9.98	8.88	8.32
2097.6	2127.6	10.10	9.02	8.41
2177.8	2207.8	10.02	8.98	8.40
2238.1	2268.1	9.70	8.78	8.27
2318.4	2348.4	9.55	8.72	8.19
2378.6	2408.6	9.41	8.64	8.19
2458.9	2488.9	9.50	8.73	8.35
2599.4	2629.4	10.12	9.44	9.02
2659.6	2689.6	10.29	9.60	9.17
2739.9	2769.9	10.72	9.87	9.48
2800.1	2830.1	11.09	10.18	9.73

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
10.0	40.0	24.17	22.45	22.44
90.3	120.3	24.28	23.29	23.25
170.6	200.6	20.88	21.20	22.96
250.9	280.9	20.88	22.12	23.43
331.2	361.2	20.58	22.53	25.32
411.5	441.5	19.72	22.39	25.54
491.7	521.7	21.12	24.38	29.54
552.0	582.0	23.62	26.84	31.04
632.3	662.3	26.60	30.15	30.48
692.5	722.5	31.31	27.77	27.42
772.8	802.8	28.42	27.24	27.01
833.0	863.0	28.64	28.10	27.35
913.3	943.3	27.48	29.35	28.09
973.5	1003.5	27.54	28.26	27.36
1053.8	1083.8	26.28	25.58	26.31
1114.0	1144.0	26.53	25.43	25.80
1194.3	1224.3	25.86	24.97	25.85
1254.5	1284.5	27.72	27.13	26.90
1334.8	1364.8	28.85	24.68	25.83
1395.0	1425.0	26.50	27.88	25.95
1475.3	1505.3	26.79	27.70	26.68
1535.5	1565.5	23.71	33.82	26.48
1615.8	1645.8	23.46	29.30	29.04
1676.0	1706.0	22.32	30.61	29.31
1756.3	1786.3	22.54	36.30	29.09
1816.5	1846.5	23.54	38.22	28.03
1896.8	1926.8	24.13	31.14	28.71
1957.0	1987.0	26.47	28.62	26.84
2037.3	2067.3	29.46	26.36	25.90
2097.6	2127.6	28.24	25.46	24.09
2177.8	2207.8	23.60	22.67	22.93
2238.1	2268.1	21.64	21.21	21.38
2318.4	2348.4	19.87	19.98	20.25
2378.6	2408.6	18.72	19.11	19.47
2458.9	2488.9	18.02	18.67	19.31
2519.1	2549.1	17.90	18.59	19.38
2599.4	2629.4	17.62	18.80	19.60
2659.6	2689.6	17.83	18.90	19.74
2739.9	2769.9	17.36	19.10	20.09
2800.1	2830.1	17.29	19.46	20.48

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
10.0	40.0	0.95	0.73	0.28
90.3	120.3	1.08	0.69	0.47
170.6	200.6	1.00	0.67	0.46
250.9	280.9	1.10	0.73	0.63
331.2	361.2	1.07	0.93	0.73
411.5	441.5	0.94	0.98	0.84
491.7	521.7	1.13	1.12	0.82
552.0	582.0	1.47	1.16	0.87
632.3	662.3	1.42	1.02	0.83
692.5	722.5	1.35	0.90	0.70
772.8	802.8	1.03	0.73	0.58
833.0	863.0	0.93	0.54	0.43
913.3	943.3	0.66	0.41	0.30
973.5	1003.5	0.66	0.38	0.28
1053.8	1083.8	0.54	0.30	0.23
1114.0	1144.0	0.47	0.23	0.18
1194.3	1224.3	0.38	0.19	0.14
1254.5	1284.5	0.38	0.20	0.14
1334.8	1364.8	0.38	0.18	0.12
1395.0	1425.0	0.40	0.20	0.13
1475.3	1505.3	0.40	0.20	0.11
1535.5	1565.5	0.46	0.23	0.14
1615.8	1645.8	0.46	0.22	0.12
1676.0	1706.0	0.50	0.22	0.10
1756.3	1786.3	0.52	0.20	0.09
1816.5	1846.5	0.53	0.20	0.08
1896.8	1926.8	0.63	0.30	0.12
1957.0	1987.0	0.64	0.40	0.21
2037.3	2067.3	0.81	0.60	0.42
2097.6	2127.6	0.98	0.77	0.61
2177.8	2207.8	1.35	1.02	0.77
2238.1	2268.1	1.57	1.22	0.99
2318.4	2348.4	2.00	1.42	1.10
2378.6	2408.6	2.37	1.59	1.14
2458.9	2488.9	2.72	1.66	1.18
2519.1	2549.1	2.74	1.61	1.11
2599.4	2629.4	2.96	1.59	0.92
2659.6	2689.6	2.76	1.47	0.84
2739.9	2769.9	3.11	1.62	0.74
2800.1	2830.1	3.11	1.61	0.66

REV. X2

SYM-18H

100818

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SYM-18H

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=900.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1800.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
890.0	10.1	6.78	10.0	20.1	5.86	1500.0	300.1	8.61
869.5	30.6	6.96	50.8	60.9	5.79	1459.2	340.9	8.54
849.1	51.0	7.03	91.6	101.7	5.73	1418.4	381.7	8.53
828.6	71.5	7.10	132.5	142.6	5.65	1377.5	422.6	8.41
808.1	92.0	7.22	173.3	183.4	5.76	1336.7	463.4	8.34
787.7	112.4	7.21	214.1	224.2	5.67	1295.9	504.2	8.30
767.2	132.9	7.21	254.9	265.0	5.72	1255.1	545.0	8.24
746.7	153.4	7.35	295.8	305.9	5.71	1214.2	585.9	8.12
726.3	173.8	7.36	336.6	346.7	5.58	1173.4	626.7	8.06
705.8	194.3	7.41	377.4	387.5	5.59	1132.6	667.5	8.01
685.3	214.8	7.42	418.2	428.3	5.64	1091.8	708.3	8.01
664.9	235.2	7.42	459.0	469.1	5.59	1051.0	749.1	7.93
644.4	255.7	7.49	499.9	510.0	5.55	1010.1	790.0	7.93
624.0	276.1	7.59	540.7	550.8	5.53	969.3	830.8	7.90
603.5	296.6	7.51	581.5	591.6	5.58	928.5	871.6	7.87
583.0	317.1	7.38	622.3	632.4	5.60	887.7	912.4	7.82
562.6	337.5	7.33	663.2	673.3	5.66	846.8	953.3	7.84
542.1	358.0	7.36	704.0	714.1	5.73	806.0	994.1	7.81
521.6	378.5	7.31	744.8	754.9	5.75	765.2	1034.9	7.77
501.2	398.9	7.36	785.6	795.7	5.81	724.4	1075.7	7.74
480.7	419.4	7.17	826.4	836.5	5.87	683.6	1116.5	7.69
460.2	439.9	7.33	867.3	877.4	6.00	642.7	1157.4	7.79
439.8	460.3	7.22	908.1	918.2	6.05	601.9	1198.2	7.79
419.3	480.8	7.10	948.9	959.0	6.14	561.1	1239.0	7.80
398.8	501.3	7.15	989.7	999.8	6.21	520.3	1279.8	7.78
378.4	521.7	7.05	1030.5	1040.6	6.21	479.5	1320.6	7.76
357.9	542.2	7.01	1071.4	1081.5	6.28	438.6	1361.5	7.73
337.4	562.7	7.01	1112.2	1122.3	6.25	397.8	1402.3	7.75
317.0	583.1	6.98	1153.0	1163.1	6.30	357.0	1443.1	7.72
296.5	603.6	6.96	1193.8	1203.9	6.35	316.2	1483.9	7.68
276.0	624.1	6.92	1234.7	1244.8	6.44	275.3	1524.8	7.70
255.6	644.5	6.94	1255.1	1265.2	6.45	254.9	1545.2	7.71
214.7	685.4	6.84	1295.9	1306.0	6.58	214.1	1586.0	7.64
194.2	705.9	6.85	1316.3	1326.4	6.67	193.7	1606.4	7.72
153.3	746.8	6.80	1357.1	1367.2	6.81	152.9	1647.2	7.77
132.8	767.3	6.80	1377.5	1387.6	6.89	132.5	1667.6	7.75
91.9	808.2	6.82	1418.4	1428.5	7.03	91.6	1708.5	7.80
71.4	828.7	6.79	1438.8	1448.9	7.08	71.2	1728.9	7.76
30.5	869.6	6.86	1479.6	1489.7	7.16	30.4	1769.7	7.89
10.0	890.1	6.98	1500.0	1510.1	7.21	10.0	1790.1	7.94

REV. X2
SYM-18H
100818
Page 2 of 5

Frequency Mixer

SYM-18H

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
5.0	44.90	50.30	54.60	36.10	38.90	41.70
8.0	45.60	50.90	54.80	36.40	39.40	42.10
10.0	45.70	51.30	55.20	36.40	39.60	42.40
90.3	52.38	53.45	53.65	37.48	41.63	46.34
170.6	46.81	47.14	47.39	39.85	45.14	48.41
250.9	43.84	43.92	44.03	42.66	48.71	44.54
331.2	42.60	42.19	42.31	46.99	49.92	41.80
411.5	42.02	41.38	41.15	48.22	47.65	39.93
491.7	41.81	41.31	40.62	48.54	45.79	39.27
552.0	42.22	41.48	40.38	48.84	43.34	38.29
632.3	43.01	41.41	40.41	45.35	42.11	38.66
692.5	42.58	41.01	40.00	41.71	40.36	38.15
772.8	42.46	40.96	39.97	38.94	39.47	38.32
833.0	43.02	41.16	39.85	37.56	38.92	38.16
913.3	44.18	42.22	40.59	35.96	38.20	38.70
973.5	44.62	42.55	40.97	35.48	37.79	39.00
1053.8	45.38	43.73	41.96	33.70	36.32	38.23
1194.3	47.56	45.51	43.89	30.40	33.52	35.83
1254.5	48.78	46.90	44.95	29.87	32.50	34.70
1334.8	51.51	50.64	48.53	28.25	30.95	33.20
1395.0	53.11	55.69	51.67	28.02	30.22	32.16
1475.3	52.12	62.55	64.16	27.46	29.49	31.03
1535.5	51.56	54.36	52.90	27.73	29.44	30.73
1615.8	50.82	48.11	45.49	27.76	29.34	30.43
1676.0	47.95	44.40	42.15	28.43	29.81	30.70
1756.3	44.33	41.04	39.30	28.79	30.20	31.26
1816.5	40.51	38.07	37.05	29.25	30.56	31.95
1896.8	37.97	36.22	35.32	30.04	31.33	32.52
1957.0	36.40	35.16	34.54	30.64	32.15	33.33
2037.3	35.57	34.78	34.35	30.92	32.31	33.78
2097.6	35.14	34.59	34.37	31.40	32.87	34.33
2177.8	34.35	34.06	34.25	31.85	33.17	34.62
2238.1	33.75	33.56	33.88	32.05	33.30	34.41
2318.4	32.85	33.00	33.45	32.60	33.74	34.73
2378.6	31.84	32.40	33.11	33.01	34.06	34.85
2458.9	30.41	31.25	32.43	33.37	34.14	34.97
2599.4	28.15	29.19	30.16	33.11	33.72	34.09
2659.6	27.90	29.12	29.97	32.71	33.29	33.55
2739.9	27.92	29.20	29.97	31.85	32.26	32.38
2800.1	27.91	29.09	30.04	31.40	31.70	31.89

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.0	40.0	24.16	24.41	24.49
90.3	120.3	29.42	29.55	29.71
170.6	200.6	31.04	31.28	31.29
250.9	280.9	32.53	32.69	32.77
331.2	361.2	33.45	33.60	33.05
411.5	441.5	35.24	34.98	33.80
491.7	521.7	39.72	36.76	35.45
552.0	582.0	41.27	37.16	35.27
632.3	662.3	42.42	39.94	37.94
692.5	722.5	46.94	42.37	40.05
772.8	802.8	48.57	45.05	43.23
833.0	863.0	48.24	45.75	44.42
913.3	943.3	46.95	45.79	45.53
973.5	1003.5	47.18	47.68	46.99
1053.8	1083.8	45.41	47.84	48.38
1114.0	1144.0	43.89	47.52	49.77
1194.3	1224.3	41.96	45.32	48.01
1254.5	1284.5	39.57	43.60	46.26
1334.8	1364.8	36.67	38.67	39.71
1395.0	1425.0	35.00	36.67	37.67
1475.3	1505.3	33.75	34.52	35.35
1535.5	1565.5	33.01	33.63	34.13
1615.8	1645.8	32.64	32.99	33.27
1676.0	1706.0	32.51	32.67	32.75
1756.3	1786.3	32.50	32.79	32.84
1816.5	1846.5	32.71	33.03	33.03
1896.8	1926.8	33.24	33.62	33.89
1957.0	1987.0	33.99	34.60	34.98
2037.3	2067.3	34.88	35.91	36.73
2097.6	2127.6	36.01	36.63	37.52
2177.8	2207.8	36.96	37.58	37.93
2238.1	2268.1	37.07	37.07	36.97
2318.4	2348.4	36.09	35.48	34.94
2378.6	2408.6	34.97	34.25	33.82
2458.9	2488.9	33.95	33.16	32.45
2519.1	2549.1	33.40	32.56	31.92
2599.4	2629.4	33.99	32.86	31.88
2659.6	2689.6	34.88	33.77	32.83
2739.9	2769.9	36.36	35.15	34.21
2800.1	2830.1	35.75	34.76	34.43

REV. X2

SYM-18H

100818

Page 3 of 5

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

SYM-18H

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1800.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+14	+17	+20		+14	+17	+20		+14	+17	+20
5.0	35.0	1.68	1.58	1.52	5.0	1.10	1.80	2.80	10.0	1.18	1.21	1.43
8.0	38.0	1.47	1.36	1.31	8.0	1.08	1.78	2.80	49.7	1.30	1.16	1.28
10.0	40.0	1.44	1.31	1.25	10.0	1.07	1.78	2.80	89.5	1.28	1.16	1.31
90.3	120.3	1.46	1.28	1.17	90.3	1.05	1.59	2.35	129.2	1.36	1.22	1.32
170.6	200.6	1.54	1.37	1.27	170.6	1.11	1.53	2.20	168.9	1.37	1.25	1.36
250.9	280.9	1.63	1.47	1.35	250.9	1.15	1.49	2.15	208.7	1.39	1.27	1.39
331.2	361.2	1.82	1.60	1.48	331.2	1.24	1.50	2.14	248.4	1.42	1.34	1.44
411.5	441.5	2.05	1.81	1.66	411.5	1.25	1.48	2.13	288.1	1.45	1.39	1.50
491.7	521.7	2.21	1.95	1.82	491.7	1.23	1.34	1.91	327.9	1.46	1.43	1.55
552.0	582.0	2.24	2.03	1.92	552.0	1.33	1.34	1.92	367.6	1.49	1.49	1.61
632.3	662.3	2.34	2.18	2.07	632.3	1.48	1.29	1.78	407.3	1.50	1.51	1.64
692.5	722.5	2.47	2.30	2.18	692.5	1.60	1.32	1.78	447.1	1.53	1.55	1.67
772.8	802.8	2.59	2.42	2.31	772.8	1.77	1.33	1.65	486.8	1.53	1.56	1.67
833.0	863.0	2.73	2.52	2.38	833.0	1.86	1.34	1.62	526.5	1.55	1.57	1.68
913.3	943.3	2.78	2.59	2.46	913.3	2.06	1.36	1.49	566.3	1.54	1.58	1.69
973.5	1003.5	2.89	2.63	2.50	973.5	2.05	1.34	1.43	606.0	1.55	1.57	1.67
1053.8	1083.8	2.88	2.64	2.51	1053.8	2.27	1.37	1.31	645.7	1.54	1.57	1.68
1194.3	1224.3	2.89	2.59	2.44	1194.3	2.43	1.36	1.17	685.5	1.54	1.56	1.65
1254.5	1284.5	2.88	2.54	2.36	1254.5	2.17	1.33	1.11	725.2	1.54	1.56	1.65
1334.8	1364.8	2.77	2.44	2.26	1334.8	2.38	1.37	1.15	764.9	1.50	1.52	1.61
1395.0	1425.0	2.77	2.38	2.18	1395.0	2.23	1.40	1.21	804.7	1.53	1.53	1.59
1475.3	1505.3	2.66	2.30	2.11	1475.3	2.38	1.49	1.35	844.4	1.47	1.47	1.55
1535.5	1565.5	2.63	2.26	2.05	1535.5	2.21	1.52	1.46	884.1	1.46	1.41	1.46
1615.8	1645.8	2.55	2.22	2.01	1615.8	2.33	1.64	1.62	923.9	1.43	1.39	1.44
1676.0	1706.0	2.50	2.20	2.01	1676.0	2.14	1.70	1.76	963.6	1.35	1.27	1.33
1756.3	1786.3	2.44	2.18	2.02	1756.3	2.20	1.81	1.91	1003.3	1.36	1.26	1.29
1816.5	1846.5	2.43	2.20	2.07	1816.5	2.14	1.87	2.03	1043.1	1.27	1.17	1.23
1896.8	1926.8	2.43	2.23	2.11	1896.8	2.09	1.94	2.15	1082.8	1.29	1.10	1.13
1957.0	1987.0	2.39	2.22	2.11	1957.0	2.01	2.01	2.29	1122.5	1.27	1.07	1.11
2037.3	2067.3	2.34	2.18	2.06	2037.3	2.01	2.06	2.34	1162.3	1.27	1.05	1.09
2097.6	2127.6	2.26	2.11	2.00	2097.6	1.99	2.13	2.45	1202.0	1.30	1.09	1.12
2177.8	2207.8	2.12	1.98	1.89	2177.8	2.00	2.22	2.57	1241.7	1.34	1.18	1.20
2238.1	2268.1	1.96	1.84	1.76	2238.1	2.00	2.26	2.59	1281.5	1.42	1.26	1.26
2318.4	2348.4	1.76	1.66	1.60	2318.4	2.05	2.36	2.70	1321.2	1.46	1.32	1.33
2378.6	2408.6	1.58	1.49	1.43	2378.6	2.09	2.44	2.78	1360.9	1.52	1.40	1.39
2458.9	2488.9	1.38	1.29	1.25	2458.9	2.16	2.52	2.88	1380.8	1.55	1.45	1.46
2599.4	2629.4	1.16	1.16	1.19	2599.4	2.27	2.63	2.96	1420.5	1.64	1.52	1.52
2659.6	2689.6	1.14	1.19	1.25	2659.6	2.35	2.71	3.00	1440.4	1.70	1.59	1.59
2739.9	2769.9	1.15	1.25	1.35	2739.9	2.48	2.81	3.10	1480.1	1.73	1.63	1.63
2800.1	2830.1	1.21	1.33	1.43	2800.1	2.54	2.83	3.14	1500.0	1.82	1.72	1.73

REV. X2

SYM-18H

100818

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	24	21	24	23	35	41	39	37	40
1	-	38	+0	37	17	55	20	48	57	48	38	50
2	89	77	59	63	57	62	59	62	61	72	67	68
3	>100	83	60	82	61	82	59	82	61	89	69	87
4	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
5	>100	>92	>92	>92	>92	>92	89	>92	>92	>92	>92	>92
6	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; -1.00 dBm.

LO IN: 930.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; -7.98 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	33	32	36	35	48	56	56	56	64
1	-	38	+0	37	16	53	20	50	50	52	45	55
2	73	59	51	51	49	54	49	53	53	66	59	62
3	>100	65	39	64	44	65	40	66	49	69	53	66
4	>100	84	77	66	73	66	73	68	81	67	74	81
5	>100	86	65	79	56	80	57	76	59	84	57	79
6	>100	>102	88	83	83	81	86	77	84	77	82	79
7	>100	>102	92	99	78	98	73	93	70	90	72	88
8	>100	>102	>102	>102	99	94	98	92	98	89	99	88
9	>100	>102	>102	>102	>102	>102	93	>102	89	101	86	>102
10	>100	>102	>102	>102	>102	>102	>102	>102	>102	>102	>102	>102
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; 9.00 dBm.

LO IN: 930.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; 2.03 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

SYM-18H

100818

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


SYM-18H

Typical Performance Curves


Conversion Loss @ IF=30MHz

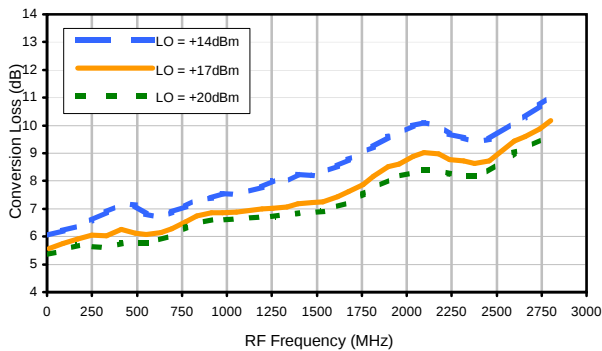


Conversion Loss vs. IF @ RF=900.1MHz

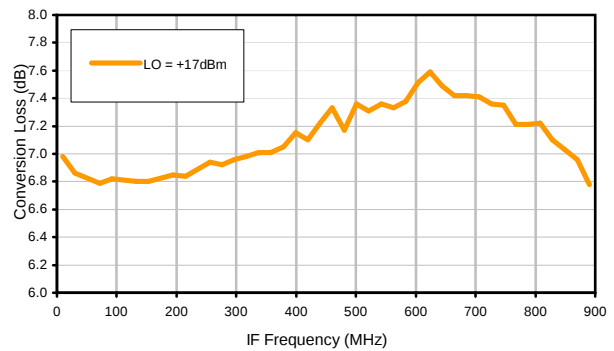


Conversion Loss vs. IF @ RF=10.1MHz

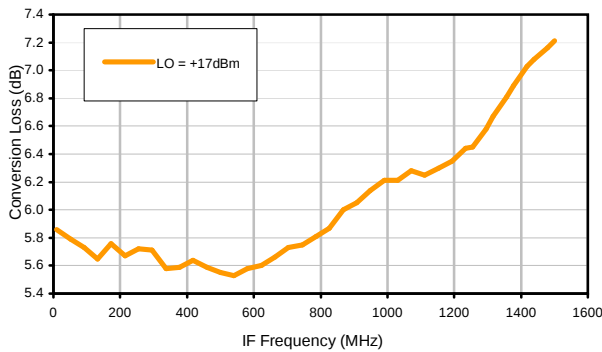


Conversion Loss vs. IF @ RF=1800.1MHz

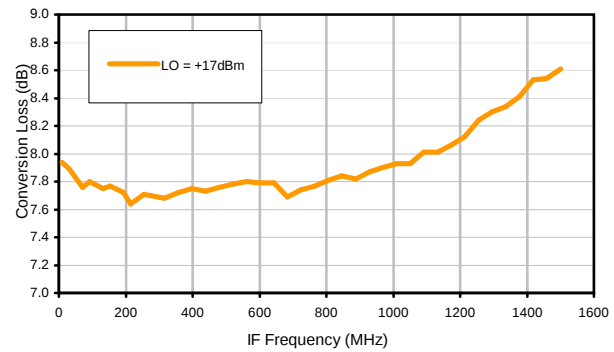

IP3 Input

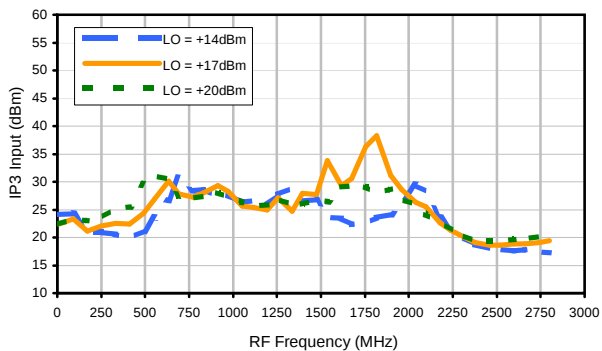

Compression @ RF IN=+14dBm

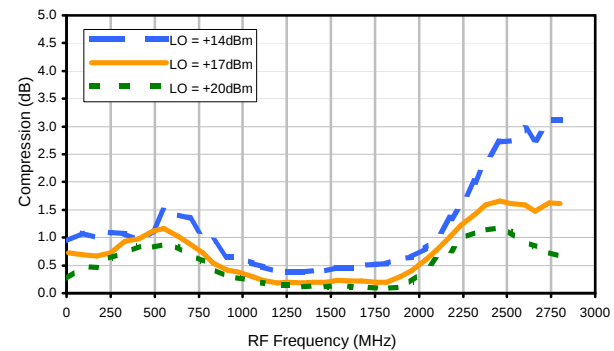

REV. X2
SYM-18H
100818
Page 1 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

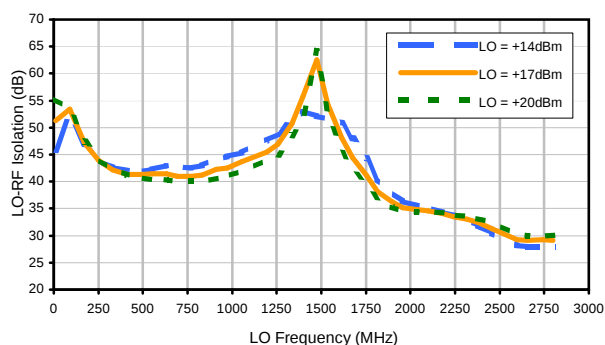


LO-IF Isolation

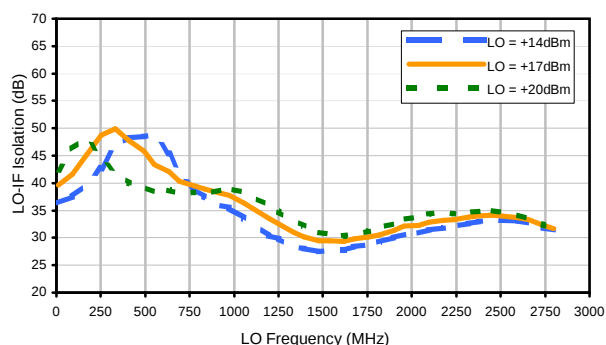


RF-IF Isolation

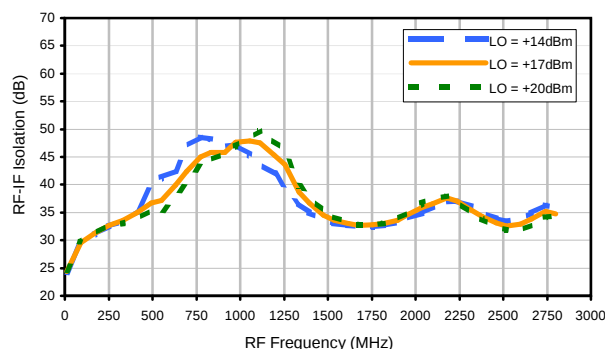


RF VSWR

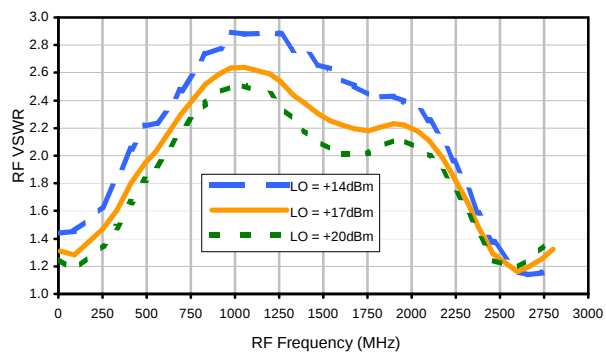

LO VSWR

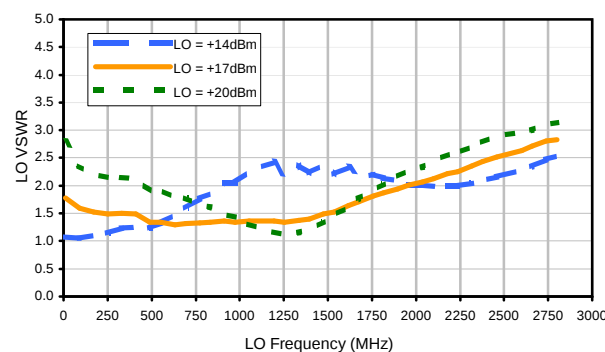

IF VSWR

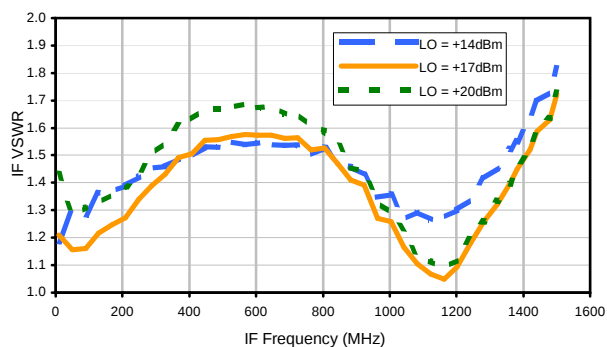

REV. X2

SYM-18H

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	16	24	21	24	23	35	41	39	37	40
1	-	38	+0	37	17	55	20	48	57	48	38	50
2	89	77	59	63	57	62	59	62	61	72	67	68
3	>100	83	60	82	61	82	59	82	61	89	69	87
4	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
5	>100	>92	>92	>92	>92	>92	89	>92	>92	>92	>92	>92
6	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; -1.00 dBm.

LO IN: 930.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; -7.98 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	33	32	36	35	48	56	56	56	64
1	-	38	+0	37	16	53	20	50	50	52	45	55
2	73	59	51	51	49	54	49	53	53	66	59	62
3	>100	65	39	64	44	65	40	66	49	69	53	66
4	>100	84	77	66	73	66	73	68	81	67	74	81
5	>100	86	65	79	56	80	57	76	59	84	57	79
6	>100	>102	88	83	83	81	86	77	84	77	82	79
7	>100	>102	92	99	78	98	73	93	70	90	72	88
8	>100	>102	>102	>102	99	94	98	92	98	89	99	88
9	>100	>102	>102	>102	>102	>102	93	>102	89	101	86	>102
10	>100	>102	>102	>102	>102	>102	>102	>102	>102	>102	>102	>102
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions:

RF IN: 900.1 MHz; 9.00 dBm.

LO IN: 930.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; 2.03 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

SYM-18H

100818

Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Outline Dimensions

TTT166
TTT167



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
TTT166	.38 (9.65)	.50 (12.70)	.15 (3.81)	.020 (0.51)	.075 (1.91)	.250 (6.35)	.425 (10.80)	.187 (4.75)	.050 (1.27)	.050 (1.27)	.070 (1.78)	.270 (6.86)	.540 (13.72)
TTT167			.23 (5.84)										

CASE #	P	Q	R	S	T	WT. GRAM
TTT166	.060 (1.52)	.095 (2.41)	.445 (11.30)	.208 (5.28)	.415 (10.54)	.8
TTT167						.8

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Note:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS Case Styles: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Tape & Reel Packaging TR-F12



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
24	12	7	Small quantity standards (see note)	10
				20
				50
				100
				200
		13	Standard	500

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M86762	ADDED CONNECTIONS "lp & lq"	05/23/03	MMG	WL
B	M94598	ADDED CONNECTION "hk"	10/08/04	MMG	HY
C	M102713	UPDATED NOTES & DESCRIPTION	01/14/06	GF	IL
D	M132989	UPDATED NOTE 2	08/24/11	GF	DJ

**SUGGESTED MOUNTING CONFIGURATION FOR
TTT166/167 CASE STYLE, "hk"/"lp"/"lq"
"x"/"ck"/"ec" PIN CONNECTIONS**

**NOTE:**

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005ANGLES $\pm$ FRACTIONS $\pm$

DRAWN

GF

03/18/03

CHECKED

IL

04/15/03

APPROVED

DJ

04/15/03



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, hk/lp/lq/x/ck/ec, TTT166/167,
SYM/HJK/SYAS/SYPD, TB-12

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-079

REV:
D

FILE: 98PL079

SCALE: 5:1

SHEET: 1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

For Pin Connections Refer to Data Sheet of the DUT



Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215