

Surface Mount

RF Transformer

SYTX2-61HP+

50Ω 12.5 Watt 10 to 60 MHz

The Big Deal

- High power handling, 12.5W
- Low insertion loss, 0.3 dB
- Small size, 0.43 x 0.69 x 0.42"



CASE STYLE: AH1647

Product Overview

Mini-Circuits' SYTX2-61HP+ is a high-power, DC isolated surface-mount transformer with a secondary/primary impedance ratio of 0.5 for applications from 10 to 60 MHz. With proper heat sinking, the transformer is capable of handling RF input power up to 12.5W. It provides very low insertion loss (0.3 dB) as well as low phase unbalance (3°) and amplitude unbalance (0.2 dB). Featuring core and wire construction mounted on a printed laminate base with wraparound terminations, the unit comes enclosed in a miniature, shielded package measuring just 0.43 x 0.69 x 0.42", ideal for dense circuit board layouts.

Key Features

Feature	Advantages
High RF power handling (12.5W) and high DC current handling (30mA)	Supports systems with high power requirements and may be used to isolate DC current.
Low insertion loss, 0.3 dB	Excellent transmission of signal power from input to output.
Low phase and amplitude unbalance, 3°, 0.2 dB	Low phase and amplitude unbalance can improve a system's electromagnetic compatibility by rejecting unwanted common-mode noise.
Small footprint, 0.43 x 0.69 x .42"	Accommodates tight space requirements for dense PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount RF Transformer

50Ω 12.5 Watt 10 to 60 MHz

SYTX2-61HP+



Generic photo used for illustration purposes only

CASE STYLE: AH1647

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size Devices/Reel
13" 200

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	12.5W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	1
PRIMARY	4
SECONDARY DOT	5
SECONDARY	8
GROUND	2,3,6,7

Features

- high power input, 12.5 Watt max.
- wide bandwidth, 10 MHz
- good amplitude unbalance, 0.2 dB typ. at 1 dB bandwidth
- excellent phase unbalance 3 deg. typ. at 1 dB bandwidth

Applications

- PCS
- BALUN
- diode matching

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			0.5		
Frequency Range		10	—	60	MHz
Insertion Loss*	10-60	—	0.3	1.0	dB
Amplitude Unbalance	10-60	—	0.2	0.8	dB
Phase Unbalance	10-60	—	3	9	Degree


* Insertion Loss is referenced to mid-band loss 0.25 dB typ.

1. The user must provide adequate means of heat removal to limit the temperature of ground connections under the PCB to +85°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 10°C/W.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
10	0.24	15.69	0.01	0.86
12	0.25	16.36	0.02	1.16
14	0.25	16.49	0.03	1.38
16	0.26	16.44	0.05	1.58
18	0.27	16.26	0.05	1.80
20	0.28	16.01	0.06	2.00
30	0.36	14.41	0.14	3.03
40	0.48	12.86	0.26	4.11
50	0.64	11.54	0.41	5.23
60	0.80	10.35	0.59	6.43


Outline Drawing

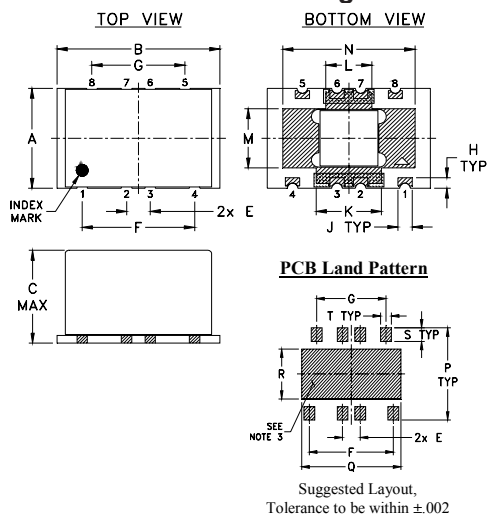

Outline Dimensions (inch/mm)

A	B	C	E	F	G	H	J	K
.433	.690	.415	.100	.476	.394	.045	.060	.276
11.00	17.53	10.54	2.54	12.09	10.01	1.14	1.52	7.01
L	M	N	P	Q	R	S	T	wt
.194	.257	.560	.475	.561	.258	.069	.061	grams
4.93	6.53	14.22	12.07	14.25	6.55	1.75	1.55	2.80

Config. C



Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M151410
SYTX2-61HP+
ED-16090/1
IG/CP/AM
150603
Page 2 of 2

RF Transformer

SYTX2-61HP+

Typical Performance Data

FREQUENCY MHz	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
3.0	0.67	9.34	0.00	0.26
5.0	0.36	12.74	0.00	0.48
7.0	0.27	14.62	0.01	0.66
9.0	0.24	15.69	0.01	0.86
11.0	0.24	16.21	0.02	1.06
12.0	0.25	16.36	0.02	1.16
12.5	0.25	16.41	0.03	1.21
13.0	0.25	16.44	0.03	1.26
13.5	0.25	16.47	0.03	1.32
14.0	0.25	16.49	0.03	1.38
14.5	0.26	16.49	0.04	1.43
15.0	0.26	16.50	0.04	1.49
16.0	0.26	16.44	0.05	1.58
18.0	0.27	16.26	0.05	1.80
20.0	0.28	16.01	0.06	2.00
30.0	0.36	14.41	0.14	3.03
40.0	0.48	12.86	0.26	4.11
50.0	0.64	11.54	0.41	5.23
60.0	0.80	10.35	0.59	6.43
70.0	0.97	9.33	0.80	7.72
80.0	1.16	8.48	1.04	9.11
90.0	1.35	7.77	1.33	10.64
100.0	1.56	7.16	1.66	12.29



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com





IF/RF MICROWAVE COMPONENTS

REV. OR
SYTX2-61HP+
6/8/2015
Page 1 of 1

RF Transformer

SYTX2-61HP+

Typical Performance Data

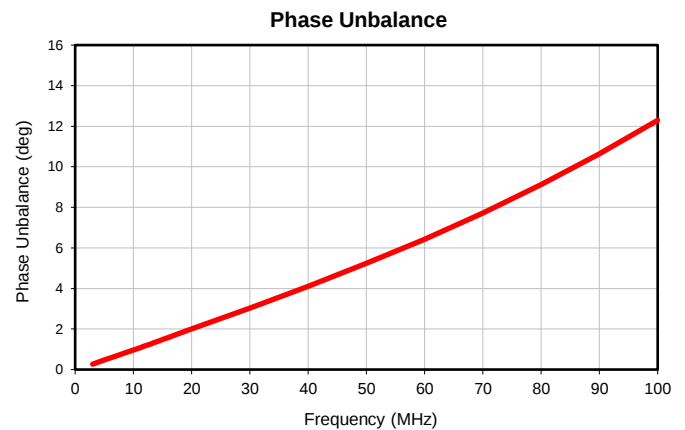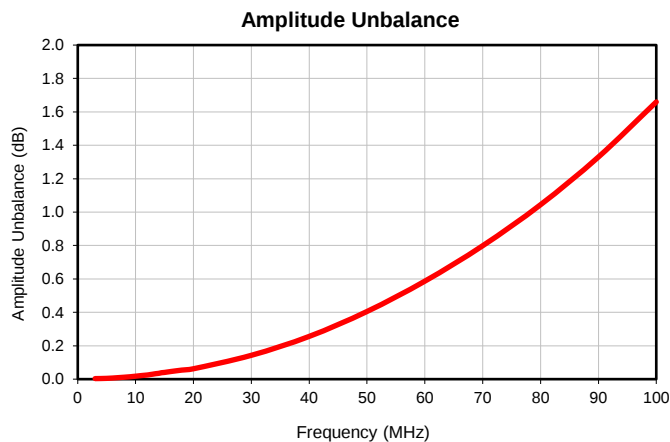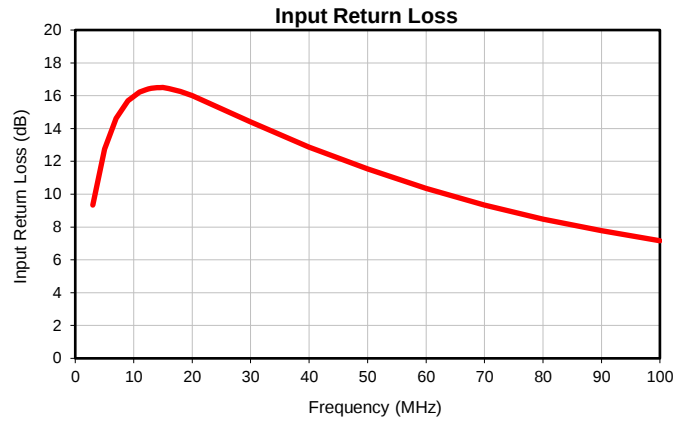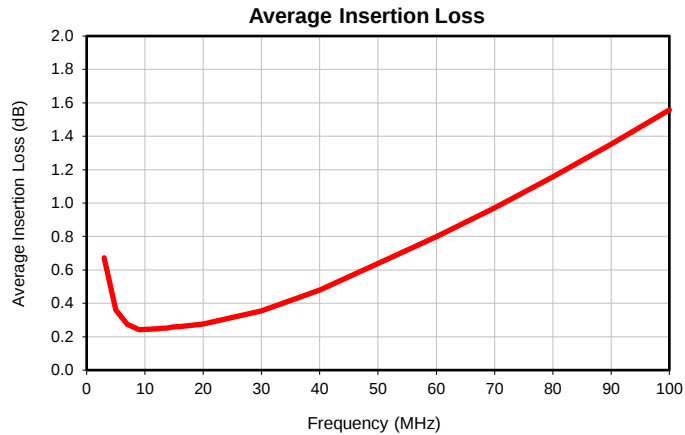

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS



REV. OR
SYTX2-61HP+
6/8/2015
Page 1 of 1

Outline Dimensions

AH1647

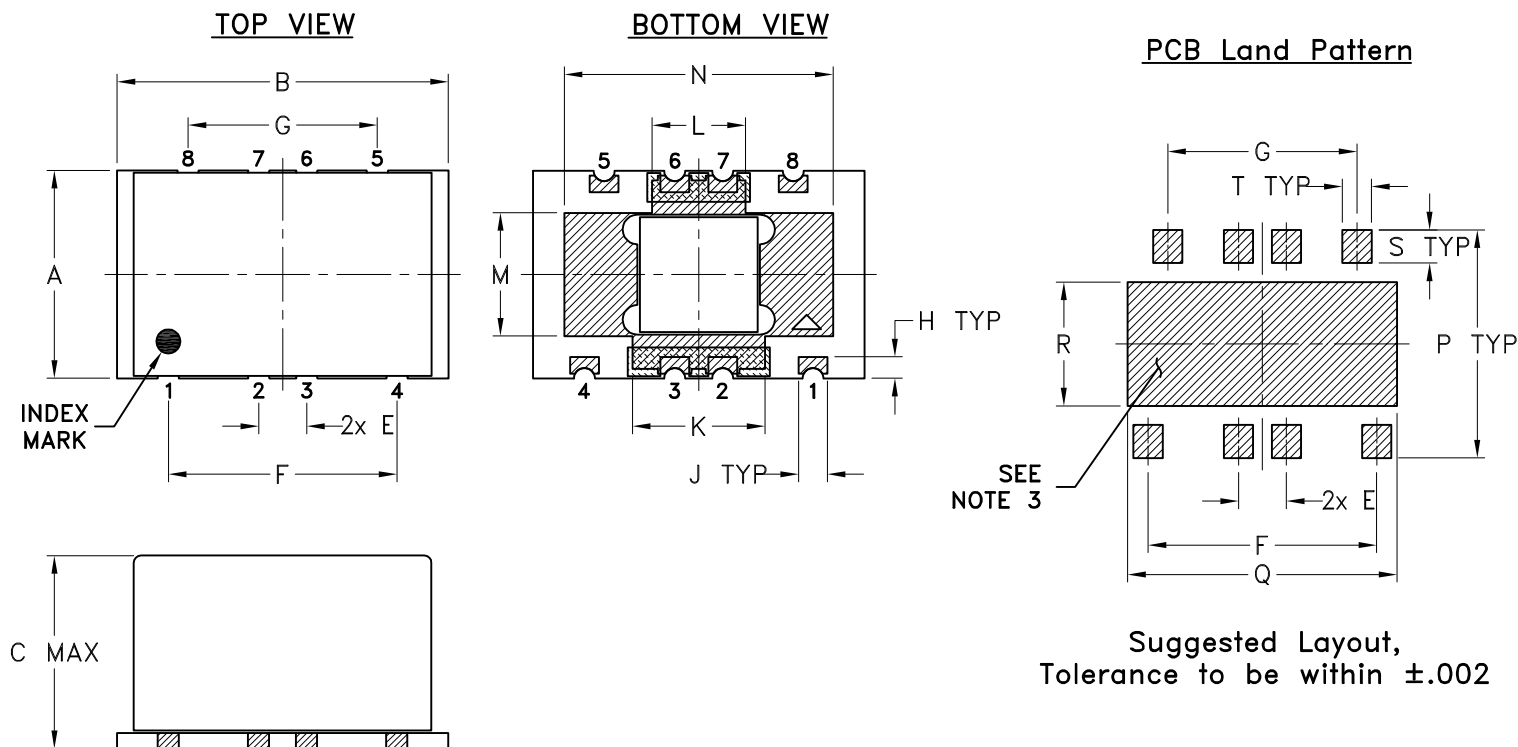

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
AH1647	.433 (11.00)	.690 (17.53)	.415 (10.54)	- -	.100 (2.54)	.476 (12.09)	.394 (10.01)	.045 (1.14)	.060 (1.52)	.276 (7.01)	.194 (4.93)	.257 (6.53)	.560 (14.22)
CASE #	P	Q	R	S	T	WT, GRAM							
AH1647	.475 (12.07)	.561 (14.25)	.258 (6.55)	.069 (1.75)	.061 (1.55)	2.80							

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm.01$; 3 Pl. $\pm.005$

Notes:

- Case material: Nickel Silver alloy.
- Base material: Printed wiring laminate.
- Termination finish: Tin copper solder alloy up to 0.07% Nickel. All models, (+) suffix.

Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F109

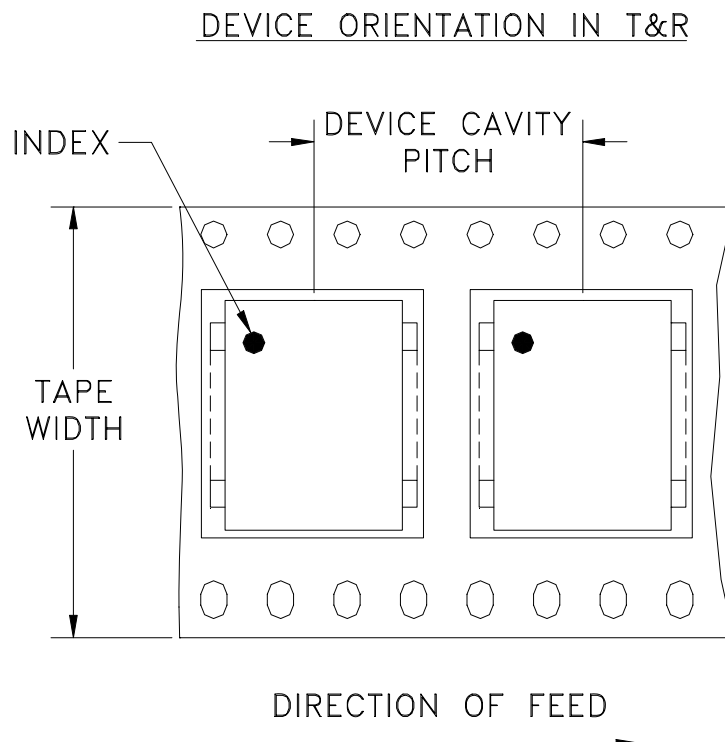

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	200


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

Evaluation Board and Circuit

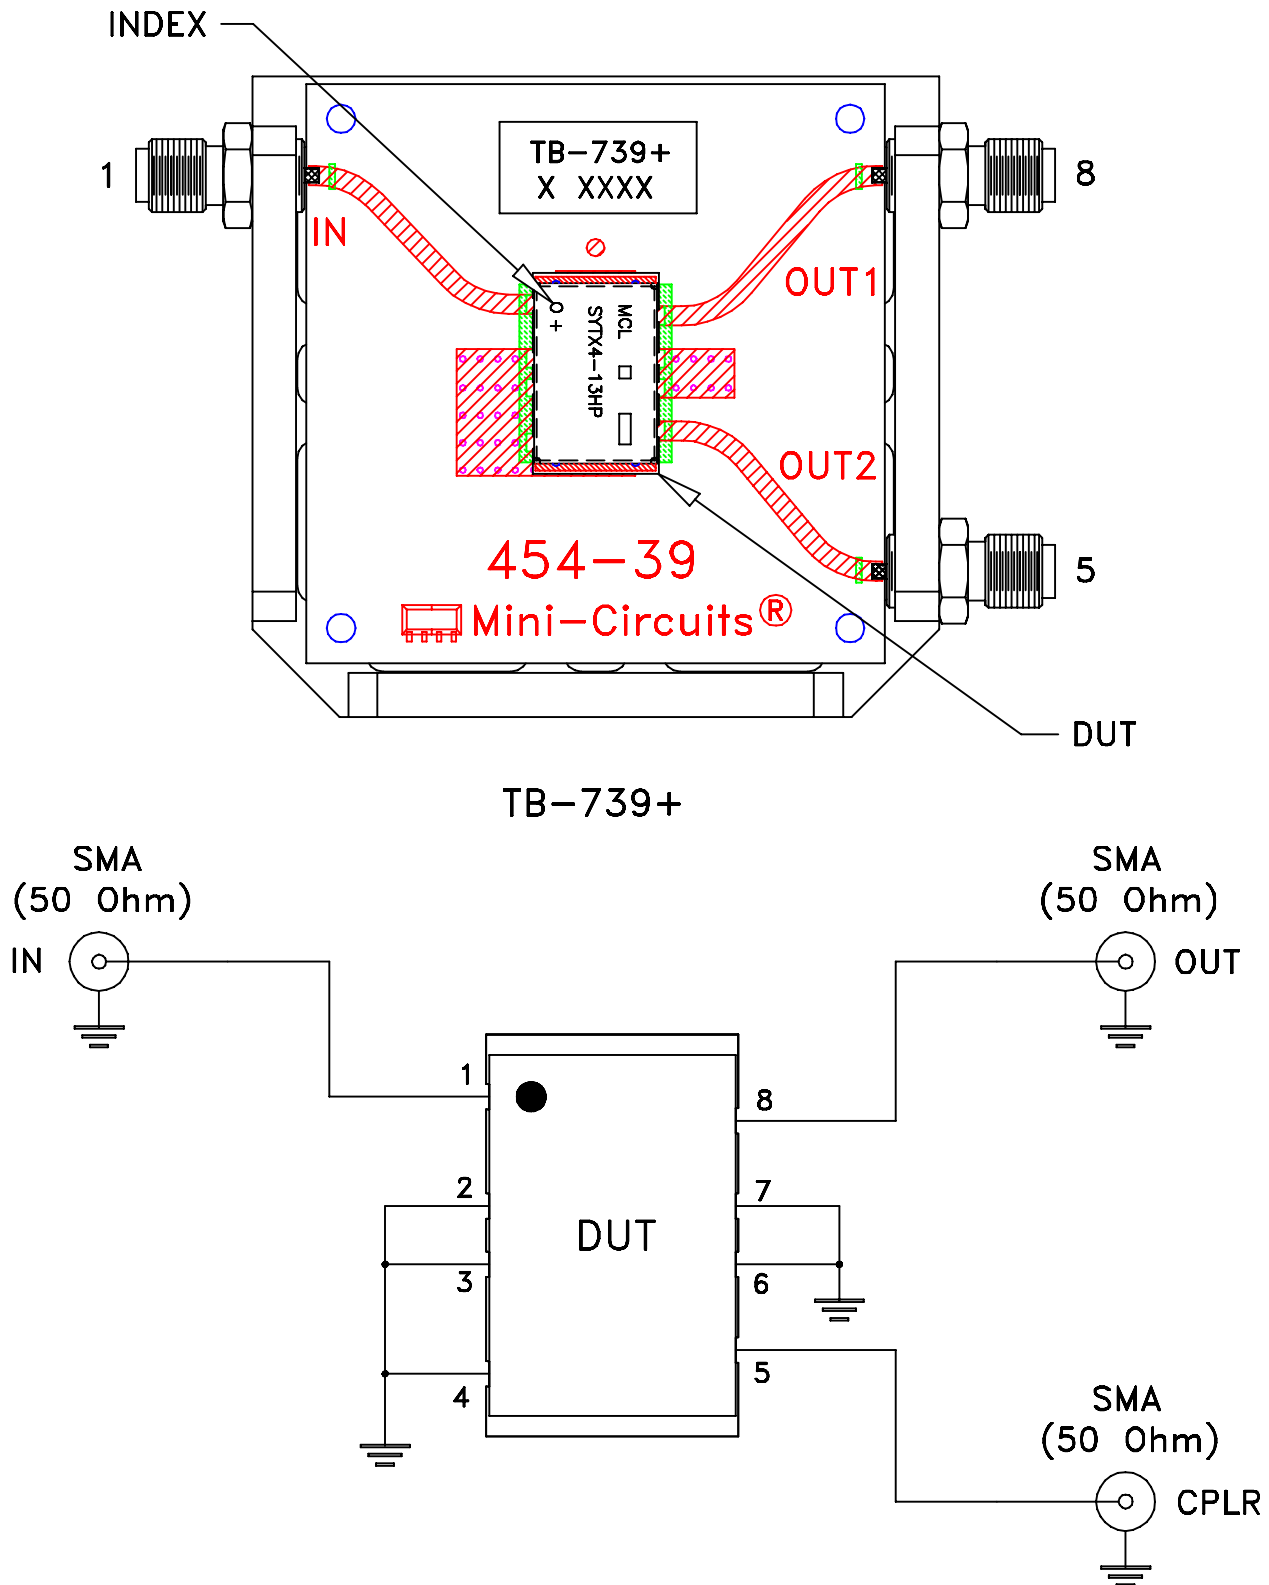

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent.
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215