## Plug-In NON-CATALOG RF Transformer Plug-In

## T1-6T-X65

**50**Ω

### 0.015 to 300 MHz

#### **Maximum Ratings**

Operating Temperature	-20°C to 85°C				
Storage Temperature	55°C to 100°C				
RF Power	0.25W				
DC Current	30mA				
Permanent damage may ecour if any of these limits are exceeded					

#### **Pin Connections**

1 🛱 2 🛱 3 🗮

6 5 4 4

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5

**Outline Drawing** 

Outline Dimensions (inch)

D

L

.300

7.62

Config. A

010

0.25

С

23

κ

.11

2.79

5.84

в

27

6.86

J

 $\cap$ 

PRI

.04

1.02

Α 30

7.62

н

.05

1.27

- D

NOTE: PIN NUMBERS DO NOT APPEAR ON UNIT, FOR REFERENCE ONLY. INDEX MARK INDICATES PIN 8.

Е

042

1.07

Μ

.35

8.89

F

020

O SEC

G

100

2.54

wt

grams

0.50

#### **Features**

- wideband, 0.015 to 300 MHz
- excellent return loss
- also available with flat-pack (W38)
- & surface mount gull-wing (KK81) leads

#### **Applications**

- VHF/UHF receivers/transmitters
- impedance matching




#### **Transformer Electrical Specifications**

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*			
		3 dB MHz	2 dB MHz	1 dB MHz	
1	0.015-300	0.015-300	0.021-150	0.03-50	

\*Insertion Loss is referenced to mid-band loss, 0.1 dB typ.

#### **Typical Performance Data**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
0.02	1.24	11.77	
0.13	0.21	26.45	
1.15	0.12	37.26	
47.47	0.40	19.27	
111.99	0.66	14.92	
147.83	0.74	14.64	
175.75	0.75	15.08	
209.75	0.77	16.64	
250.25	0.84	20.06	
300.00	1.09	26.64	

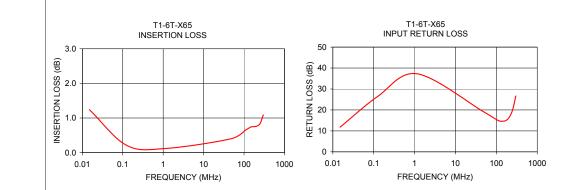

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement ins C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warrantv and terms and conditions (collectively: "Standard Terms"): Purchasers of this performance

Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable stabilished test performance data contained in this specification document are based on Mini-Circuit's applicable stabilished test performance data contained in this specification document are based on Mini-Circuit's applicable stabilished test performance data contained in this specification document are based on Mini-Circuit's applicable stabilished test performance data contained in this specification document are based on Mini-Circuit's applicable stabilished test performance data contained in this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's vebsite at www.minicircuits.com/MCLStore/terms.jsp

#### REV. C M160892 T1-6T-X65 IG/CP/AM 17/09/28

## **RF Transformer**

Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.02	1.24	11.77
0.13	0.21	26.45
1.15	0.12	37.26
47.47	0.40	19.27
111.99	0.66	14.92
147.83	0.74	14.64
175.75	0.75	15.08
209.75	0.77	16.64
250.25	0.84	20.06
300.00	1.09	26.64



INTERNET http://www.minicircuits.com P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 INTERNET http://www.minicircuits.com Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010 Mini-Circuits ISO 9001 & ISO 14001 Certified

## **RF** Transformer

Typical Performance Curves

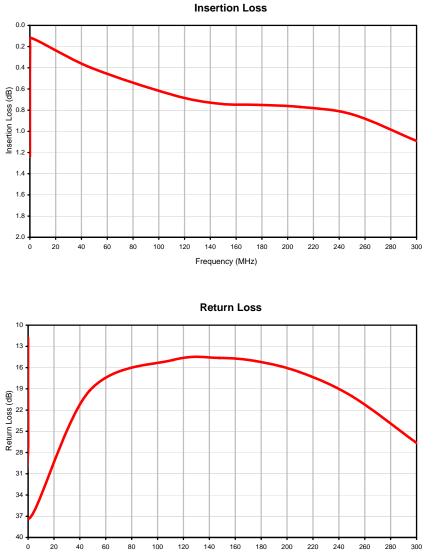

Frequency (MHz)





INTERNET http://www.minicircuits.com P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 INTERNET http://www.minicircuits.com Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010 Mini-Circuits ISO 9001 & ISO 14001 Certified

# Case Style

X65

## **Outline Dimensions**

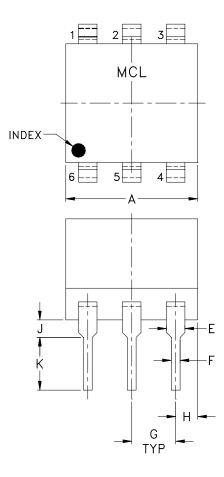



CASE #	А	В	С	D	Е	F	G	Н	J	К	L	М	WT. GRAM
X65	.30 (7.62)	.27 (6.86)	.23 (5.84)	.010 (0.25)	.042 (1.07)	.020 (0.51)	.100 (2.54)	.05 (1.27)	.04 (1.02)	.11 (2.79)	.300 (7.62)	.35 (8.89)	.50

Dimensions are in inches (mm)

#### Notes:

1. Case material: Plastic.

Termination finish: For RoHS Case Styles: Tin Plate over Nickel Plate. For RoHS-5 Case Styles: Tin-Lead Plate.



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010 Mini-Circuits ISO 9001 & ISO 14001 Certified

## Mini-Circuits

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Lead Integrity	2 Pound Pull, perpendicular to edge of unit	MIL-STD-202, Method 211, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

ENV19 Rev: A 03/09/11 M131005 File: ENV19.pdf

This document and its contents are the property of Mini-Circuits.