

Frequency Mixer

Level 17 (LO Power +17 dBm) 2 to 500 MHz

TAK-1H+

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	8
RF	1
IF	3,4 [^]
GROUND	2,5,6,7
CASE GROUND	2

[^] pins must be connected together externally

Outline Drawing

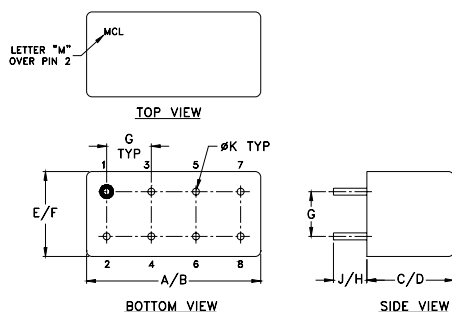

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.240	.250	.370	.400
19.56	20.32	6.10	6.35	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	3.7	

Features

- low conversion loss, 5.93 dB typ.
- high isolation, 40 dB typ. L-R, 35 dB typ. L-I
- rugged welded construction
- hermetically sealed

Applications

- VHF/UHF
- instrumentation
- defense & federal communications



Generic photo used for illustration purposes only

CASE STYLE: A05

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band m		Total Range		L		M		U		L		M		U	
f_L - f_U		$\bar{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
2-500	DC-500	5.93	0.08	7.5	8.5	50	40	40	30	30	25	45	35	35	25	25	20

1 dB COMP.: +14 dBm typ.


L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
2.00	32.00	6.30	62.98	52.28	1.22	1.67
5.00	35.00	5.95	62.06	52.79	1.10	1.60
10.00	40.00	5.92	60.47	52.35	1.03	1.63
20.00	50.00	5.91	57.14	51.13	1.02	1.61
34.13	64.13	5.81	53.27	49.30	1.04	1.58
50.00	80.00	5.72	50.24	47.27	1.06	1.57
66.26	96.26	5.66	48.03	45.61	1.07	1.55
82.33	52.33	5.71	46.33	44.27	1.08	1.54
100.00	70.00	5.63	44.99	43.26	1.09	1.57
130.52	100.52	5.61	43.18	41.91	1.10	1.55
162.65	132.65	5.61	41.46	40.45	1.10	1.55
200.00	170.00	5.60	40.12	39.22	1.08	1.60
259.04	229.04	5.42	38.10	37.51	1.07	1.67
307.24	277.24	5.62	37.54	36.13	1.06	1.70
355.43	325.43	5.86	37.41	36.94	1.05	1.76
387.56	357.56	5.92	36.35	35.99	1.04	1.82
435.76	405.76	5.81	35.35	33.91	1.05	1.84
467.89	437.89	5.90	36.34	33.81	1.06	1.85
483.95	453.95	6.08	36.44	33.54	1.08	1.87
500.00	470.00	6.27	36.27	33.21	1.09	1.90







Electrical Schematic

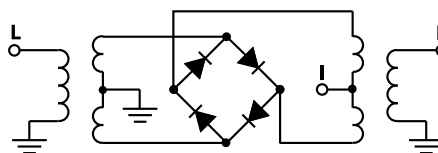

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



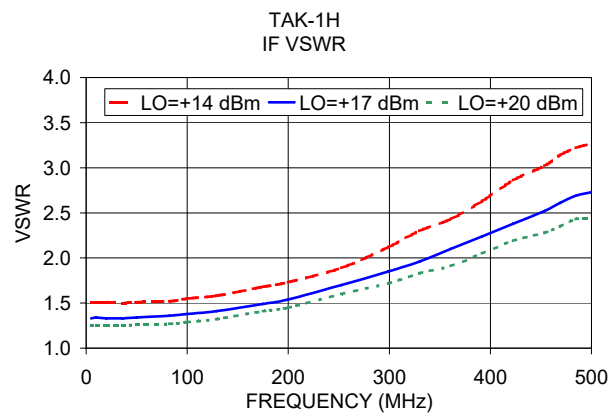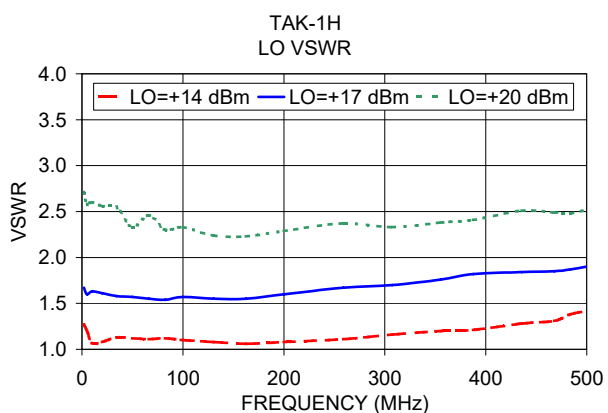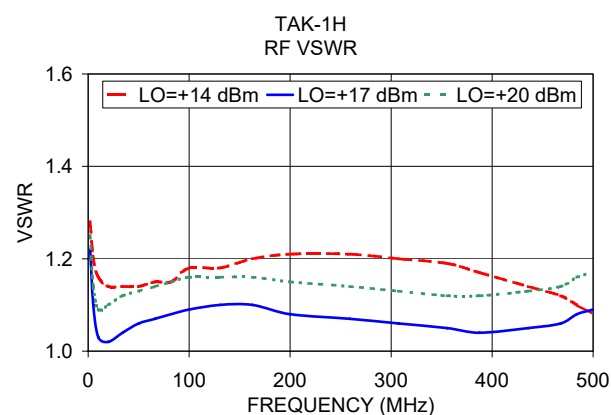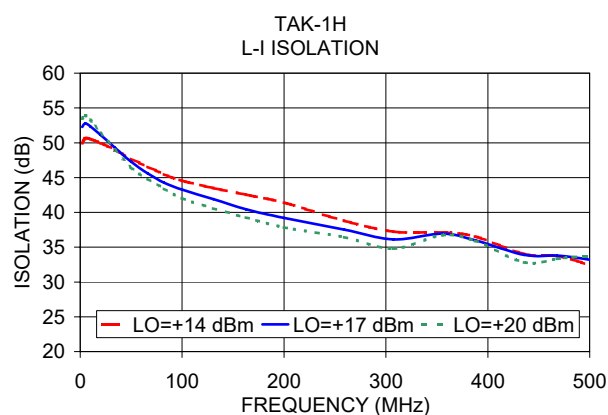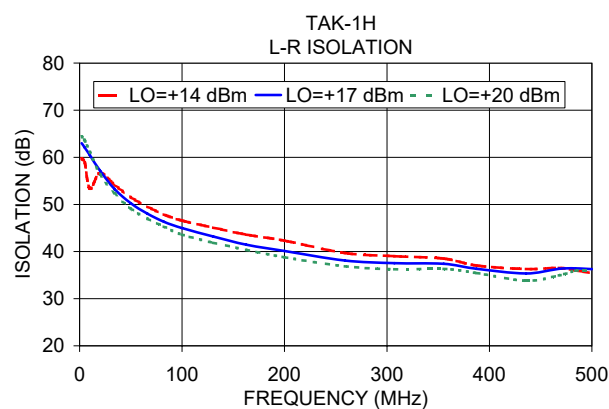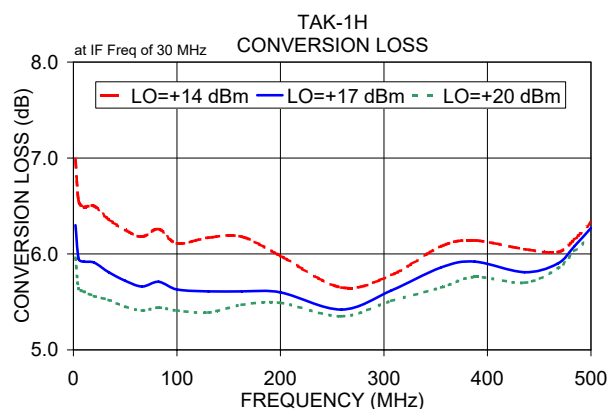

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Frequency Mixer

TAK-1H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
2.0	32.0	6.99	6.30	5.96
5.0	35.0	6.55	5.95	5.64
10.0	40.0	6.49	5.92	5.61
30.4	60.4	7.15	6.44	6.09
50.6	80.6	7.11	6.46	6.14
70.9	100.9	7.01	6.41	6.12
91.1	121.1	7.07	6.42	6.12
111.4	141.4	6.97	6.34	6.12
131.6	161.6	6.81	6.34	6.13
151.9	181.9	6.86	6.36	6.14
172.2	202.2	6.79	6.35	6.13
192.4	222.4	6.74	6.34	6.15
212.7	242.7	6.71	6.32	6.14
232.9	262.9	6.72	6.36	6.16
253.2	283.2	6.70	6.36	6.17
273.4	303.4	6.76	6.38	6.20
293.7	323.7	6.78	6.42	6.21
313.9	343.9	6.84	6.52	6.31
334.2	364.2	6.91	6.57	6.35
354.5	384.5	6.89	6.57	6.37
374.7	404.7	6.95	6.59	6.39
395.0	425.0	6.99	6.60	6.36
415.2	445.2	6.99	6.66	6.40
435.5	465.5	7.01	6.72	6.48
455.7	485.7	7.09	6.80	6.61
476.0	506.0	7.18	6.91	6.72
496.3	526.3	7.19	6.93	6.75
516.5	546.5	7.43	7.12	6.91
537.0	567.0	7.73	7.30	6.99
557.3	587.3	8.00	7.38	6.97
577.5	607.5	8.35	7.49	6.97
597.8	627.8	8.71	7.58	6.95
618.0	648.0	9.25	7.96	7.04
638.3	668.3	9.76	8.39	7.17
658.6	688.6	10.19	8.74	7.27
678.8	708.8	10.65	9.15	7.50
699.1	729.1	11.08	9.58	7.89
719.4	749.4	11.47	10.02	8.35
739.7	769.7	11.55	10.18	8.57
759.9	789.9	11.42	10.26	8.79

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	26.72	29.56	30.35
30.4	60.4	25.30	29.09	30.05
50.6	80.6	27.08	29.83	29.62
70.9	100.9	30.77	29.52	31.51
91.1	121.1	25.18	27.20	32.58
111.4	141.4	27.93	32.75	35.14
131.6	161.6	27.95	30.29	33.08
151.9	181.9	26.49	30.08	31.52
172.2	202.2	27.44	37.02	28.32
192.4	222.4	28.55	30.54	27.07
212.7	242.7	32.09	33.29	27.38
232.9	262.9	30.17	28.28	28.04
253.2	283.2	28.94	24.76	23.34
273.4	303.4	28.40	24.90	22.77
293.7	323.7	25.65	23.19	23.55
313.9	343.9	25.40	21.78	22.06
334.2	364.2	28.28	22.60	21.36
354.5	384.5	29.25	26.63	23.98
374.7	404.7	30.80	31.71	26.82
395.0	425.0	23.65	35.82	27.81
415.2	445.2	21.30	23.44	27.74
435.5	465.5	19.96	19.86	22.33
455.7	485.7	19.97	18.53	18.79
476.0	506.0	19.46	17.97	17.70
496.3	526.3	20.00	18.06	17.59
516.5	546.5	18.79	17.43	17.24
536.8	566.8	18.76	17.41	17.68
557.0	587.0	17.65	17.32	18.74
577.3	607.3	16.52	17.82	20.30
597.5	627.5	15.39	18.62	21.54
617.8	647.8	13.81	18.83	22.21
638.0	668.0	12.58	18.12	23.67
658.3	688.3	11.38	15.82	24.18
678.6	708.6	11.16	14.77	24.81
698.8	728.8	10.94	13.48	21.89
719.1	749.1	11.02	13.08	19.89
739.3	769.3	11.25	13.03	18.78
759.6	789.6	11.49	13.08	17.85
779.8	809.8	12.00	13.47	18.07
800.1	830.1	12.90	13.95	17.59

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	0.95	0.52	0.32
30.4	60.4	0.65	0.42	0.28
50.6	80.6	0.75	0.45	0.26
70.9	100.9	0.90	0.41	0.25
91.1	121.1	0.76	0.45	0.24
111.4	141.4	0.77	0.38	0.19
131.6	161.6	0.87	0.40	0.20
151.9	181.9	0.87	0.41	0.21
172.2	202.2	0.91	0.37	0.19
192.4	222.4	0.92	0.37	0.19
212.7	242.7	0.91	0.38	0.21
232.9	262.9	1.01	0.37	0.22
253.2	283.2	0.96	0.37	0.23
273.4	303.4	0.93	0.37	0.26
293.7	323.7	0.91	0.37	0.28
313.9	343.9	0.87	0.29	0.22
334.2	364.2	0.93	0.34	0.23
354.5	384.5	0.93	0.40	0.26
374.7	404.7	0.94	0.44	0.29
395.0	425.0	0.98	0.53	0.38
415.2	445.2	1.15	0.64	0.51
435.5	465.5	1.34	0.74	0.58
455.7	485.7	1.40	0.80	0.62
476.0	506.0	1.52	0.94	0.73
496.3	526.3	1.57	1.00	0.75
516.5	546.5	1.89	1.22	0.90
536.8	566.8	1.96	1.28	0.93
557.0	587.0	2.10	1.37	0.97
577.3	607.3	2.07	1.41	1.03
597.5	627.5	2.06	1.60	1.17
617.8	647.8	1.84	1.72	1.32
638.0	668.0	1.51	1.59	1.37
658.3	688.3	1.15	1.33	1.45
678.6	708.6	0.75	1.02	1.41
698.8	728.8	0.44	0.77	1.41
719.1	749.1	-0.05	0.44	1.15
739.3	769.3	-0.31	0.15	0.94
759.6	789.6	-0.43	0.08	0.84
779.8	809.8	-0.47	-0.07	0.68
800.1	830.1	-0.43	-0.23	0.42

REV. X2
TAK-1H+
100818
Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

TAK-1H+

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=250.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
240.0	10.1	6.63	10.0	20.1	6.24	490.0	10.1	7.07
234.1	16.0	6.64	22.3	32.4	6.18	477.7	22.4	6.96
228.2	21.9	6.49	34.6	44.7	6.18	465.4	34.7	6.88
222.3	27.8	6.53	46.9	57.0	6.17	453.1	47.0	6.89
216.4	33.7	6.49	59.2	69.3	6.08	440.8	59.3	6.89
210.5	39.6	6.44	71.5	81.6	6.15	428.5	71.6	6.76
204.6	45.5	6.51	83.8	93.9	6.19	416.2	83.9	6.65
198.7	51.4	6.41	96.2	106.3	6.15	403.8	96.3	6.52
192.8	57.3	6.38	108.5	118.6	6.16	391.5	108.6	6.43
186.9	63.2	6.37	120.8	130.9	6.11	379.2	120.9	6.42
181.0	69.1	6.35	133.1	143.2	6.11	366.9	133.2	6.38
175.1	75.0	6.44	145.4	155.5	6.22	354.6	145.5	6.30
169.2	80.9	6.37	157.7	167.8	6.25	342.3	157.8	6.33
163.3	86.8	6.34	170.0	180.1	6.24	330.0	170.1	6.34
157.4	92.7	6.36	182.3	192.4	6.23	317.7	182.4	6.31
151.5	98.6	6.23	194.6	204.7	6.22	305.4	194.7	6.36
145.6	104.5	6.28	206.9	217.0	6.23	293.1	207.0	6.34
139.7	110.4	6.25	219.2	229.3	6.29	280.8	219.3	6.35
133.8	116.3	6.16	231.5	241.6	6.27	268.5	231.6	6.42
127.9	122.2	6.12	243.8	253.9	6.30	256.2	243.9	6.43
122.1	128.0	6.08	256.2	266.3	6.40	243.8	256.3	6.51
116.2	133.9	6.11	268.5	278.6	6.37	231.5	268.6	6.55
110.3	139.8	6.15	280.8	290.9	6.37	219.2	280.9	6.53
104.4	145.7	6.14	293.1	303.2	6.38	206.9	293.2	6.59
98.5	151.6	6.15	305.4	315.5	6.36	194.6	305.5	6.61
92.6	157.5	6.12	317.7	327.8	6.44	182.3	317.8	6.61
86.7	163.4	6.13	330.0	340.1	6.50	170.0	330.1	6.64
80.8	169.3	6.16	342.3	352.4	6.48	157.7	342.4	6.63
74.9	175.2	6.15	354.6	364.7	6.55	145.4	354.7	6.62
69.0	181.1	6.17	366.9	377.0	6.60	133.1	367.0	6.64
63.1	187.0	6.14	379.2	389.3	6.56	120.8	379.3	6.61
57.2	192.9	6.15	391.5	401.6	6.61	108.5	391.6	6.59
51.3	198.8	6.17	403.8	413.9	6.57	96.2	403.9	6.63
45.4	204.7	6.20	416.2	426.3	6.67	83.8	416.3	6.64
39.5	210.6	6.24	428.5	438.6	6.87	71.5	428.6	6.71
33.6	216.5	6.24	440.8	450.9	6.94	59.2	440.9	6.78
27.7	222.4	6.24	453.1	463.2	7.04	46.9	453.2	6.81
21.8	228.3	6.27	465.4	475.5	7.00	34.6	465.5	6.88
15.9	234.2	6.31	477.7	487.8	6.95	22.3	477.8	6.92
10.0	240.1	6.33	490.0	500.1	7.01	10.0	490.1	6.93

REV. X2

TAK-1H+

100818

Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
2.0	59.73	62.98	64.42	49.91	52.28	53.48
5.0	58.95	62.06	63.57	50.65	52.79	53.94
10.0	53.36	60.47	61.17	50.51	52.35	53.27
30.4	78.58	76.61	75.21	59.49	58.17	57.15
50.6	75.39	73.36	72.68	55.66	54.57	54.33
70.9	73.08	71.35	69.60	53.01	51.63	51.12
91.1	71.93	70.41	69.10	50.53	49.65	48.91
111.4	70.49	68.45	67.77	48.88	47.79	46.99
131.6	69.41	68.20	67.62	47.41	45.82	45.83
151.9	68.58	67.28	65.97	45.89	44.68	44.84
172.2	68.18	66.83	65.59	44.39	43.72	44.17
192.4	68.19	66.14	64.54	43.33	43.27	43.98
212.7	67.14	66.62	65.57	42.04	42.37	43.04
232.9	65.93	65.24	64.51	41.68	42.26	42.97
253.2	64.26	62.93	61.53	41.51	42.27	42.51
273.4	65.08	63.46	62.50	40.36	41.14	41.72
293.7	64.57	62.88	61.71	40.64	41.45	41.83
313.9	64.03	63.39	62.64	41.15	41.84	41.42
334.2	62.88	63.41	63.47	39.60	40.74	40.74
354.5	59.40	60.02	61.27	39.43	40.38	40.76
374.7	58.32	58.95	59.56	39.58	39.91	40.00
395.0	56.82	58.13	60.31	39.15	39.04	38.89
415.2	54.74	55.67	56.48	40.15	38.60	37.47
435.5	54.93	56.68	59.40	41.19	39.14	36.52
455.7	55.02	56.65	57.27	40.10	39.91	37.01
476.0	54.01	54.90	57.86	40.40	39.90	37.87
496.3	56.01	57.33	59.35	41.08	39.93	38.51
516.5	58.86	59.77	61.24	39.81	38.61	37.72
536.8	64.87	60.26	55.31	39.36	36.80	35.83
557.0	58.62	51.52	46.10	37.56	34.56	33.62
577.3	56.81	50.55	46.55	37.29	33.19	31.74
597.5	54.41	47.92	44.27	37.34	32.29	30.57
617.8	50.71	45.39	43.64	38.09	31.51	29.66
638.0	50.22	46.28	44.54	38.75	32.22	29.15
658.3	46.11	43.73	42.31	37.01	33.41	29.28
678.6	46.78	46.09	45.21	35.65	33.75	29.02
698.8	44.12	42.22	39.82	34.17	33.47	29.39
719.1	43.34	41.73	39.10	31.76	31.77	30.31
739.3	43.24	42.67	41.53	30.69	30.72	29.90
759.6	43.96	42.74	40.05	29.68	29.90	29.48
779.8						
800.1						

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	42.42	40.70	41.07
30.4	60.4	37.69	37.98	37.84
50.6	80.6	34.60	34.57	34.75
70.9	100.9	32.18	32.48	32.51
91.1	121.1	30.57	30.90	31.09
111.4	141.4	29.22	29.52	29.82
131.6	161.6	28.29	28.52	28.64
151.9	181.9	27.30	27.69	27.98
172.2	202.2	26.71	27.00	27.24
192.4	222.4	26.23	26.54	26.76
212.7	242.7	25.85	26.21	26.44
232.9	262.9	25.45	25.96	26.28
253.2	283.2	25.13	25.65	26.00
273.4	303.4	24.65	25.36	25.87
293.7	323.7	24.59	25.24	25.78
313.9	343.9	24.56	25.00	25.37
334.2	364.2	24.63	25.02	25.29
354.5	384.5	24.62	24.98	25.22
374.7	404.7	24.47	24.91	25.16
395.0	425.0	24.37	25.06	25.61
415.2	445.2	23.94	24.68	25.45
435.5	465.5	23.68	24.52	25.49
455.7	485.7	23.28	24.02	24.79
476.0	506.0	22.92	23.53	24.22
496.3	526.3	22.59	23.05	23.57
516.5	546.5	22.08	22.46	22.82
536.8	566.8	21.68	22.03	22.28
557.0	587.0	21.16	21.52	21.76
577.3	607.3	20.71	21.02	21.21
597.5	627.5	20.18	20.45	20.53
617.8	647.8	19.79	19.89	19.90
638.0	668.0	19.64	19.66	19.58
658.3	688.3	19.52	19.64	19.53
678.6	708.6	19.46	19.68	19.45
698.8	728.8	19.42	19.91	20.01
719.1	749.1	19.38	19.71	20.09
739.3	769.3	19.52	19.98	20.68
759.6	789.6	19.72	19.91	20.43
779.8	809.8	19.94	20.04	20.46
800.1	830.1	20.21	20.22	20.34

Frequency Mixer

TAK-1H+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+14	+17	+20
5.0	35.0	1.28	1.22	1.25
10.0	40.0	1.20	1.10	1.14
30.4	60.4	1.22	1.08	1.02
50.6	80.6	1.19	1.05	1.03
70.9	100.9	1.15	1.03	1.06
91.1	121.1	1.17	1.04	1.08
111.4	141.4	1.13	1.04	1.12
131.6	161.6	1.11	1.05	1.12
151.9	181.9	1.12	1.05	1.12
172.2	202.2	1.10	1.07	1.15
192.4	222.4	1.08	1.09	1.16
212.7	242.7	1.08	1.09	1.18
232.9	262.9	1.07	1.10	1.18
253.2	283.2	1.06	1.11	1.19
273.4	303.4	1.06	1.11	1.19
293.7	323.7	1.06	1.11	1.19
313.9	343.9	1.05	1.11	1.18
334.2	364.2	1.05	1.12	1.18
354.5	384.5	1.05	1.14	1.21
374.7	404.7	1.06	1.18	1.25
395.0	425.0	1.05	1.20	1.30
415.2	445.2	1.06	1.19	1.31
435.5	465.5	1.07	1.19	1.30
455.7	485.7	1.08	1.19	1.28
476.0	506.0	1.10	1.20	1.28
496.3	526.3	1.11	1.21	1.27
516.5	546.5	1.10	1.20	1.25
536.8	566.8	1.09	1.18	1.22
557.0	587.0	1.09	1.16	1.17
577.3	607.3	1.10	1.12	1.10
597.5	627.5	1.13	1.08	1.05
617.8	647.8	1.19	1.10	1.05
638.0	668.0	1.26	1.16	1.11
658.3	688.3	1.35	1.24	1.17
678.6	708.6	1.44	1.33	1.24
698.8	728.8	1.56	1.44	1.33
719.1	749.1	1.68	1.56	1.44
739.3	769.3	1.80	1.68	1.55
759.6	789.6	1.90	1.79	1.66
779.8	809.8	2.01	1.91	1.76
800.1	830.1	2.09	1.99	1.86

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+14	+17	+20
5.0	1.27	1.67	2.71
10.0	1.20	1.60	2.58
30.4	1.06	1.62	2.39
50.6	1.06	1.60	2.36
70.9	1.02	1.53	2.21
91.1	1.04	1.52	2.21
111.4	1.05	1.54	2.23
131.6	1.04	1.58	2.31
151.9	1.05	1.57	2.27
172.2	1.04	1.54	2.21
192.4	1.03	1.55	2.22
212.7	1.04	1.60	2.29
232.9	1.06	1.63	2.33
253.2	1.07	1.62	2.30
273.4	1.09	1.64	2.31
293.7	1.11	1.65	2.32
313.9	1.13	1.70	2.38
334.2	1.17	1.74	2.42
354.5	1.19	1.73	2.40
374.7	1.21	1.74	2.40
395.0	1.25	1.78	2.44
415.2	1.28	1.83	2.49
435.5	1.32	1.87	2.52
455.7	1.34	1.89	2.57
476.0	1.36	1.90	2.55
496.3	1.40	1.94	2.60
516.5	1.45	1.99	2.65
536.8	1.48	2.00	2.64
557.0	1.52	2.03	2.62
577.3	1.56	2.03	2.63
597.5	1.62	2.08	2.68
617.8	1.67	2.13	2.72
638.0	1.72	2.19	2.75
658.3	1.75	2.24	2.80
678.6	1.78	2.31	2.87
698.8	1.83	2.37	2.95
719.1	1.86	2.41	3.00
739.3	1.92	2.48	3.05
759.6	1.92	2.44	3.04
779.8	1.97	2.49	3.09
800.1	2.01	2.53	3.13

IF (OUT) (MHz)	IF VSWR @LO=500.5MHz (:1)		
	@LO (dBm)		
	+14	+17	+20
5.0	1.51	1.33	1.25
10.0	1.51	1.34	1.25
22.6	2.33	2.03	1.85
35.1	2.21	1.97	1.78
47.7	2.09	1.93	1.71
60.3	2.05	1.93	1.70
72.8	2.07	1.94	1.72
85.4	2.13	1.96	1.76
97.9	2.22	2.00	1.81
110.5	2.26	2.02	1.83
123.1	2.30	2.06	1.86
135.6	2.27	2.06	1.86
148.2	2.23	2.05	1.84
160.8	2.22	2.05	1.85
173.3	2.27	2.09	1.88
185.9	2.35	2.14	1.94
198.5	2.41	2.18	1.97
211.0	2.44	2.19	1.99
223.6	2.43	2.18	1.98
236.2	2.40	2.17	1.96
248.7	2.40	2.19	1.97
261.3	2.43	2.22	2.00
273.8	2.48	2.26	2.03
286.4	2.52	2.28	2.05
299.0	2.54	2.28	2.07
311.5	2.57	2.30	2.08
324.1	2.57	2.31	2.09
336.7	2.59	2.34	2.11
349.2	2.61	2.37	2.14
361.8	2.65	2.41	2.18
374.4	2.68	2.43	2.19
386.9	2.73	2.45	2.22
399.5	2.79	2.50	2.25
412.1	2.85	2.55	2.29
424.6	2.86	2.57	2.31
437.2	2.85	2.57	2.31
449.7	2.89	2.60	2.34
462.3	2.97	2.67	2.39
474.9	3.06	2.74	2.45
487.4	3.11	2.78	2.49
500.0	2.83	2.55	2.30

REV. X2
TAK-1H+
100818
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	36	24	41	25	42	28	60	26	43
1	-	20	+0	32	14	43	22	36	39	45	27	58
2	97	71	54	79	54	67	53	71	52	66	56	76
3	>100	61	53	67	59	71	48	69	48	67	56	80
4	>100	85	79	91	78	>93	72	85	71	92	80	>93
5	>100	85	77	84	76	82	69	82	67	91	67	85
6	>100	>93	88	>93	87	>93	83	>93	84	>93	84	>93
7	>100	>93	93	>93	89	>93	85	90	85	>93	89	>93
8	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
9	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
10	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; -1.00 dBm.

LO IN: 280.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; -7.23 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	47	37	52	40	58	47	62	44	74
1	-	20	+0	33	14	56	22	39	43	51	39	62
2	78	71	51	65	53	68	52	72	47	66	51	71
3	>100	51	42	54	45	58	41	55	49	57	53	61
4	>100	80	64	88	63	80	63	75	63	75	61	76
5	>100	71	54	70	58	70	53	66	49	80	49	66
6	>100	92	71	81	70	84	73	89	71	84	70	85
7	>100	76	73	74	61	71	67	77	61	77	58	84
8	>100	96	86	100	82	90	82	89	85	96	77	89
9	>100	85	80	89	91	82	76	85	70	79	65	80
10	>100	95	102	>103	92	95	97	96	92	>103	81	103
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions:

RF IN: 250.1 MHz; 9.00 dBm.

LO IN: 280.01 MHz; +17.00 dBm

IF OUT: 29.91 MHz; 2.71 dBm

Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.

2. + entry denotes harmonics are in (dBc) above IF OUTPUT.

3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2

TAK-1H+

100818

Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


TAK-1H+

Typical Performance Curves


Conversion Loss @ IF=30MHz

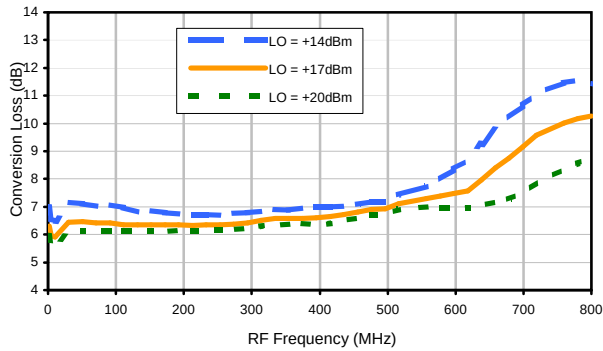


Conversion Loss vs. IF @ RF=250.1MHz

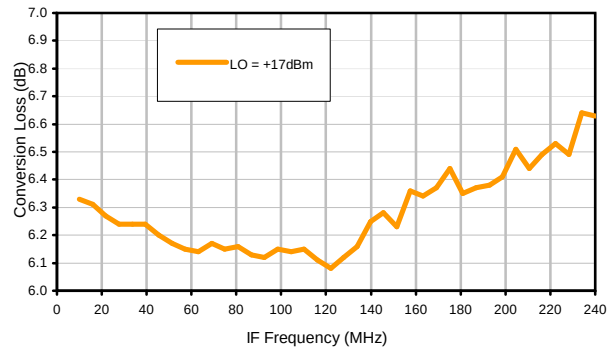


Conversion Loss vs. IF @ RF=10.1MHz

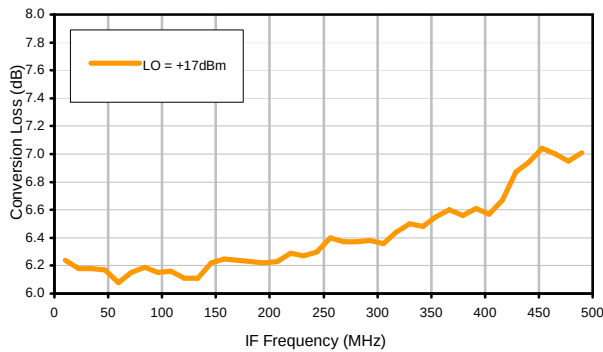


Conversion Loss vs. IF @ RF=500.1MHz

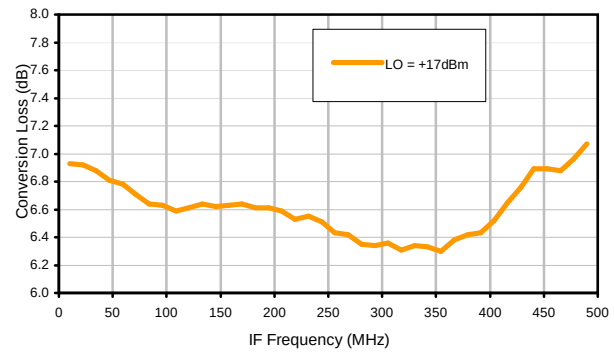

IP3 Input

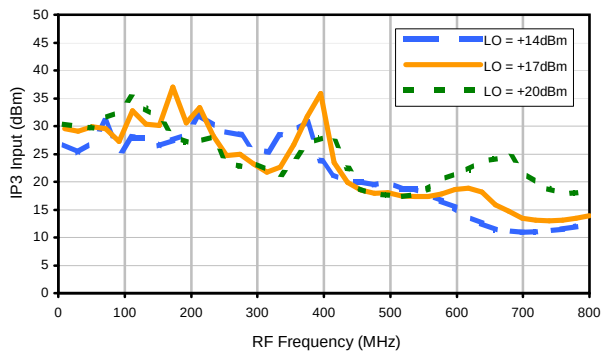

Compression @ RF IN=+14dBm

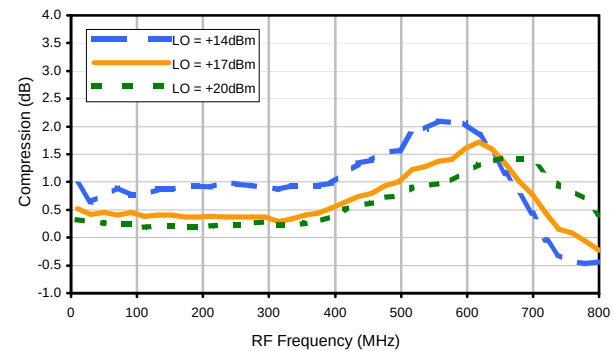

REV. X2

TAK-1H+

100818

Page 1 of 3

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Typical Performance Curves


LO-RF Isolation

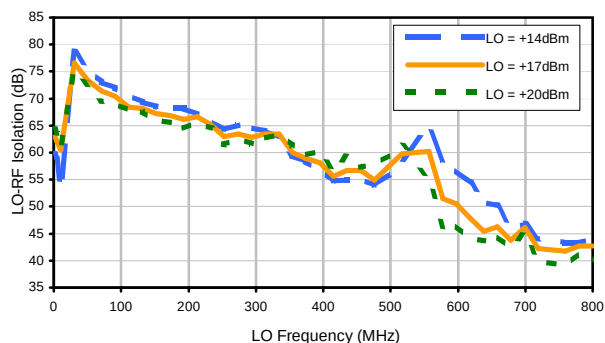


LO-IF Isolation

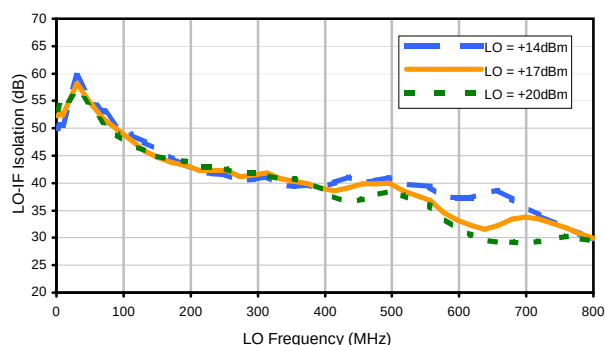


RF-IF Isolation

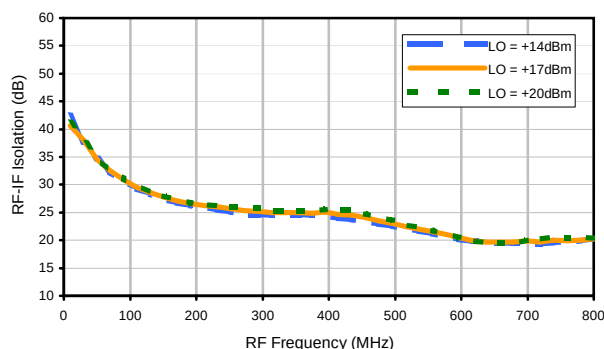


RF VSWR

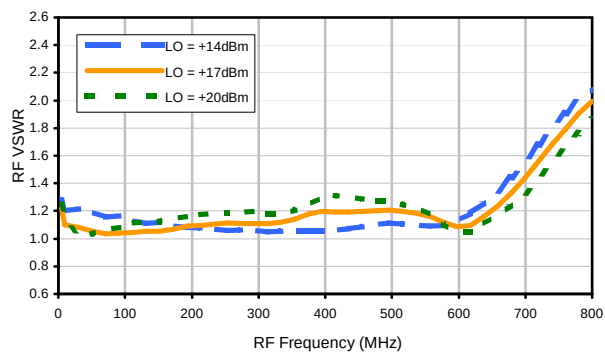

LO VSWR

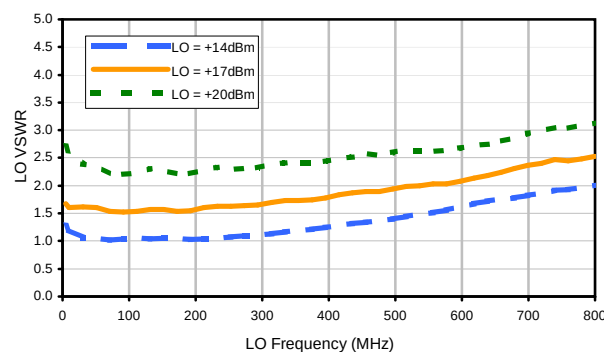

IF VSWR

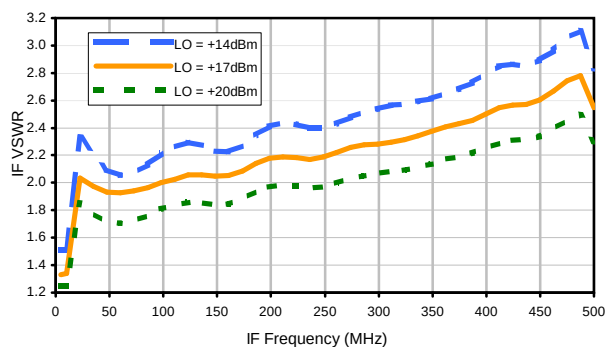

REV. X2

TAK-1H+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	36	24	41	25	42	28	60	26	43
1	-	20	+0	32	14	43	22	36	39	45	27	58
2	97	71	54	79	54	67	53	71	52	66	56	76
3	>100	61	53	67	59	71	48	69	48	67	56	80
4	>100	85	79	91	78	>93	72	85	71	92	80	>93
5	>100	85	77	84	76	82	69	82	67	91	67	85
6	>100	>93	88	>93	87	>93	83	>93	84	>93	84	>93
7	>100	>93	93	>93	89	>93	85	90	85	>93	89	>93
8	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
9	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
10	>100	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93	>93
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; -1.00 dBm.
LO IN: 280.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; -7.23 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	26	47	37	52	40	58	47	62	44	74
1	-	20	+0	33	14	56	22	39	43	51	39	62
2	78	71	51	65	53	68	52	72	47	66	51	71
3	>100	51	42	54	45	58	41	55	49	57	53	61
4	>100	80	64	88	63	80	63	75	63	75	61	76
5	>100	71	54	70	58	70	53	66	49	80	49	66
6	>100	92	71	81	70	84	73	89	71	84	70	85
7	>100	76	73	74	61	71	67	77	61	77	58	84
8	>100	96	86	100	82	90	82	89	85	96	77	89
9	>100	85	80	89	91	82	76	85	70	79	65	80
10	>100	95	102	>103	92	95	97	96	92	>103	81	103
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 250.1 MHz; 9.00 dBm.
LO IN: 280.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; 2.71 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
TAK-1H+
100818
Page 3 of 3



A01
A04
A05
A06

Outline Dimensions

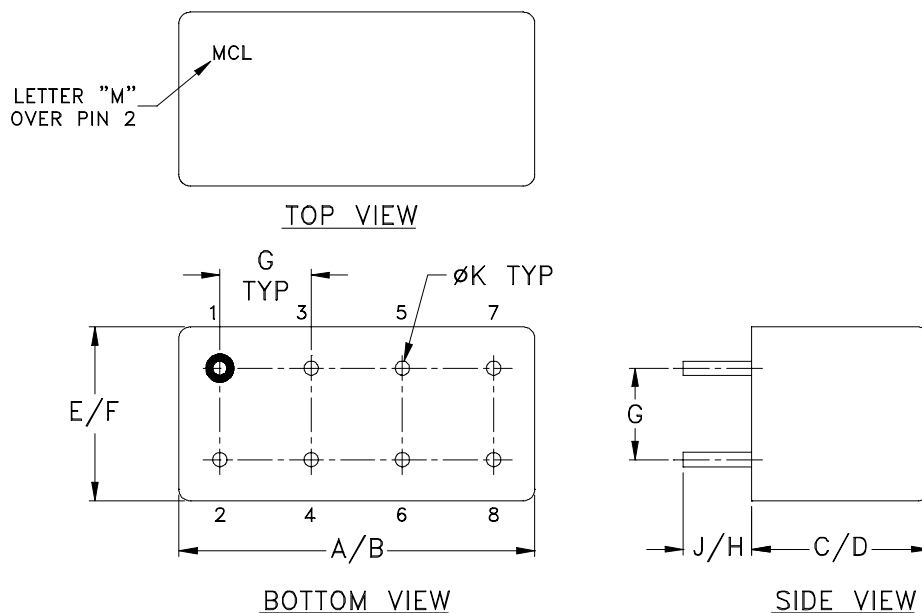

CASE#	A	B	C	D	E	F	G	H	J	K	WT, GRAM
A01	.770 (19.56)	.800 (20.32)	.385 (9.78)	.400 (10.16)	.370 (9.40)	.400 (10.16)	.200 (5.08)	.20 (5.08)	.14 (3.56)	.031 (.79)	5.2
A04			.200 (5.08)	.210 (5.33)							3.7
A05			.240 (6.10)	.250 (6.35)							3.7
A06			.285 (7.24)	.310 (7.87)							5.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: C.R.S.
Pin material: #52 alloy.
Cover material: Cupro-Nickel.
- Pin finish: Electro Tin-Silver.
- Insulated spacer available. Request P/N B14-045-01.
- Tolerance on pin diameter $\pm .005$ inch.
- Glass meniscus 0.015 inch max.
- Blue bead indicates Pin 1. Pin numbers do not appear on unit, for reference only.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Moisture Resistance	10 cycles, 24 hours per cycle	MIL-STD-202, Method 106, Condition A, except 50°C and end point electrical test done within 12 hours
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Terminal Strength	4 1/2 Pound Pull	MIL-STD-202, Method 211, Condition A



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D