RF Transformer

50Ω 350 to 1500 MHz

TC1-15G2+



Generic photo used for illustration purposes only

CASE STYLE: AT224-3

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost Devices/Reel 20, 50, 100, 200, 500 1000, 2000


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA
Permanent damage may occur if any o	of these limits are exceeded.


Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

Outline Drawing AT224-3



PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

F	Е	D	С	В	Α
.025	.030	.050	.150	.150	.150
0.64	0.76	1.27	3.81	3.81	3.81
wt		K	J	Н	G
grams		.030	.190	.065	.028
0.10		0.76	4.83	1.65	0.71

Config. G



Features

- suitable for tin/lead and RoHS solder systems
- wideband, 350 to 1500 MHz
- · balanced transmission line
- · good return loss
- · aqueous washable

Applications

- cellular
- · impedance matching
- balanced amplifier
- baluns


Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*				
		3 dB MHz	2 dB MHz	1 dB MHz		
1	350-1500	_	350-1500	800-1500		

^{*} Insertion Loss is referenced to mid-band loss, 0.35 dB tvp.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
350.00 360.00 470.00 580.00 690.00 800.00 975.00 1150.00 1325.00	0.46 0.56 0.71 0.86 0.59 0.60 0.48 0.38 0.43	8.47 8.38 7.92 7.58 8.03 8.62 11.81 19.36 29.22 30.48	





- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.


 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

RF Transformer TC1-15G2+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
350.00	0.46	8.47
360.00	0.56	8.38
470.00	0.71	7.92
580.00	0.86	7.58
690.00	0.59	8.03
800.00	0.60	8.62
975.00	0.48	11.81
1150.00	0.38	19.36
1325.00	0.43	29.22
1500.00	0.50	30.48


Typical Performance Curves

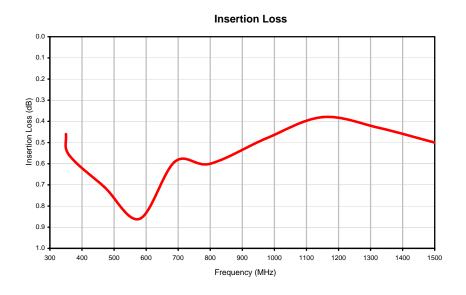




Outline Dimensions

AT224-3

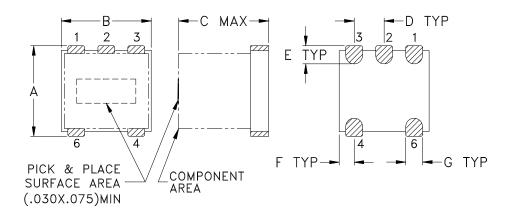

PCB Land Pattern



Suggested Layout, Tolerance to be within ±.002

CASE #	A	В	С	D	Е	F	G	Н	J	K	L	WT. GRAMS
AT224-3	.150	.150	.150	.050	.030	.025	.028	.065	.190	.030		.10
11122.5	(3.81)	(3.81)	(3.81)	(1.27)	(0.76)	(0.64)	(0.71)	(1.65)	(4.83)	(0.76)		.10

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

- 1. Open style, ceramic base.
- 2. Termination finish: $3.15-5.12 \mu$ inch (.08-.130 microns) Gold over 78–236 μ inch (1.98-6.0 microns) Nickel plate.






P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

Tape & Reel Packaging TR-F17

DEVICE ORIENTATION IN T&R

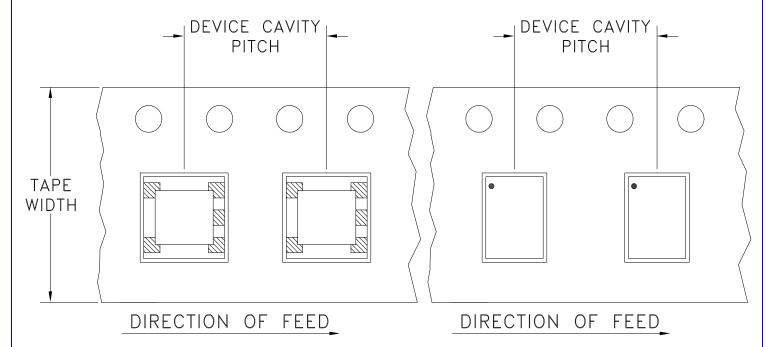

Tape Width,	Device Cavity	Reel Size,	Devices per Reel	
mm	Pitch, mm	inches		
			Small	20
			quantity	50
		7	standards	100
12	8		(see note)	200
				500
		12	Ctandard	1000
		13	Standard	2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com
RF/IF MICROWAVE COMPONENTS:


98-TR- Rev.: C (02/13/18) M166283 File: 98-TR-F17.docx

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION	
Ψ	

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M106563	NEW RELEASE	08/23/06	ΑV	IG

SUGGESTED MOUNTING CONFIGURATION FOR AT224/DB714 CASE STYLE, "gs/ha/hd" PIN CONNECTIONS (FOR SINGLE ENDED TO BALANCED APPLICATION)

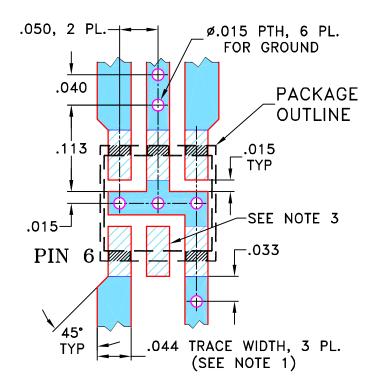

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - 3. THIS PAD IS NOT REQUIRED FOR AT224 CASE STYLE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


				_								
UNLESS OTHERWISE SPECIFIED)	INITIALS	DATE					• 4 ®				
DIMENSIONS ARE IN INCHES	DRAWN	AV	07/28/06		\perp Mini	ı — C	ircu	1ts :	Neptu	ne Avenue NY 11235		
TOLERANCES ON:	CHECKED	IL	08/23/06		T			Bro	okiyn	NI IIZJO		
3 PL DECIMALS ± .005	APPROVED	IG	08/23/06									
FRACTIONS ±				PL.	gs/ha/hd	, AT2	24/DB71	4. TC/T(CM.	TB-145		
Mini	∭ Mini−Circuits ®]	6 / /	•	,	, ,	•			
EXCEPT FOR USE EXPRESSLY GRANTE	THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY			SIZE	CODE IDENT	DRAWING	NO:			REV:		
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			A	15542		98-PL	-244		OR			
PARIT, IN WHOLE OR IN PART, WITH	OUT WRITTEN PERMISSION OF MINI-CIRCUITS.		WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					SCALE:	8:1	SHEET:	1	OF 1
	ASHEETA1.	DWG REV:A DA	TE:01/12/95	5	98PL244		0.1		T	Or I		

Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

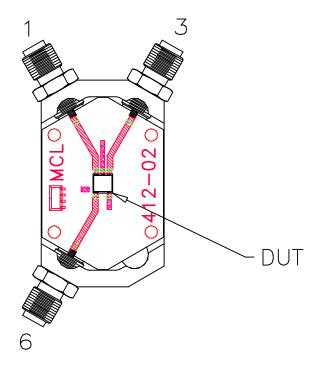

TB-145

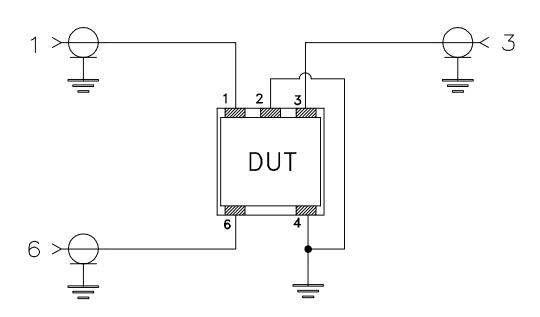

Schematic Diagram

Notes:

- 1. 50 Ohm SMA Female connectors.
- 2. PCB Material: Rogers RO4350B or its equivalent, III Mini-Circuits® Dielectric Constant=3.5, Thickness=.020"



Environmental Specifications

ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

ENV02T1 Rev: B

02/25/11

M130240 File: ENV02T1.pdf

This document and its contents are the property of Mini-Circuits.