

Precision

Digital Step Attenuator

50Ω TTL Control, Pin Diode 10 to 1000 MHz

TOAT-51020+



Generic photo used for illustration purposes only

CASE STYLE: QQ96

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
Input Power	15 dBm
DC Voltage	5.5 V
TTL	5.5V

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	4
RF OUT	11
TTL CONTROL #1	2
TTL CONTROL #2	3
TTL CONTROL #3	1
+5V DC	12
CASE GROUND	5,6,7,8,9,10

Features

- wideband, 10 to 1000 MHz
- excellent step accuracy, 0.2 dB typ.
- excellent VSWR 1.3 typ.
- low DC current, 6 mA typ.
- hermetic, metal, TO-8 case

Applications

- base stations
- cellular
- test-sets
- military, hi-rel applications

Digital Step Attenuator Electrical Specifications


MODEL NO.	FREQUENCY (MHz)		PRIMARY ATTENUATION STEPS (dB)			ATTENUATION (dB)		VSWR (:1)		
			@TTL CONTROL PORT			(1,1,1)** Nom.	(0,0,0) Max.	L	M	U
	f _i	f _u	#1	#2	#3					
TOAT-51020+	10	1000	5±0.4	10±0.4	20±0.5	35.0	4.0	1.6	1.4	1.5

L=10 to 100 MHz M=100 to 500 MHz U=500 to 1000 MHz

** Total attenuation above thru-loss.

1. Step accuracy is specified for basic steps. For combination of steps accuracy is additive.
2. Thru-loss is minimum insertion loss with all attenuation elements bypassed (All TTL controls state are Low)
3. For optimum operation of TOAT models, ensure the device case is properly connected to the ground plane (of PC board)

Outline Drawing

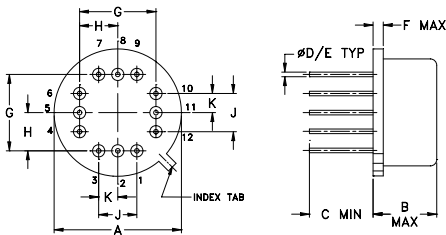


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.600	.250	.25	.016	.020	.04
15.24	6.35	6.35	0.41	0.51	1.02
G	H	J	K	wt	
.400	.200	.200	.100	grams	
10.16	5.08	5.08	2.54	4.0	

Additional Specifications

DC Voltage	+5V
DC Current	12mA max.
Switching Time (50% TTL to within specified accuracy of the next-selected attenuation step, and to within 0.1 dB of steady-state Thru-Loss)	10μs typ., 15μs max.,
TTL Input High Threshold	2V min
TTL Input Low Threshold	0.8V max.
TTL Toggle Rate	50 kHz typ.
1dB Compression	0 dBm (10-100 MHz) +10 dBm (100-1000MHz)

Electrical Schematic

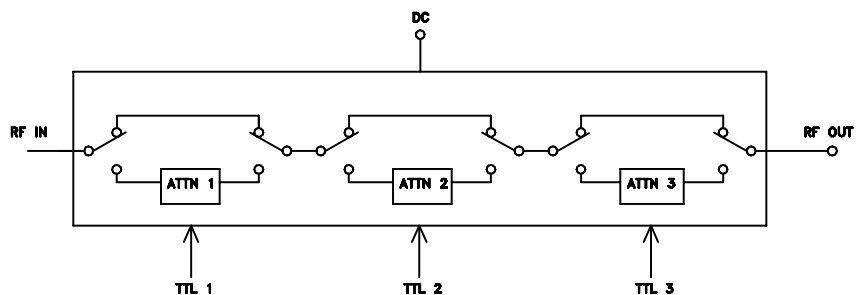




Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
TOAT-51020+
DJ/VV/CP/AM
200819

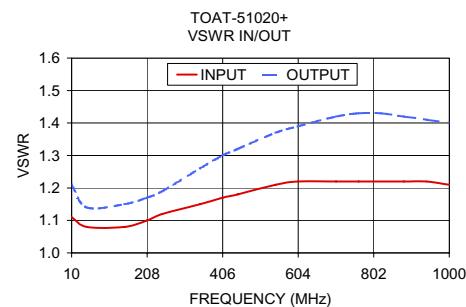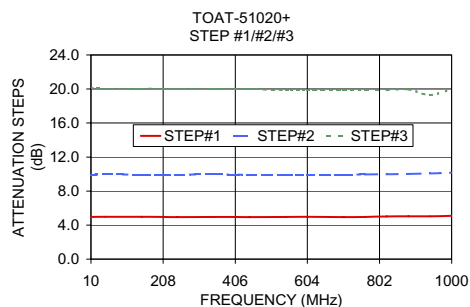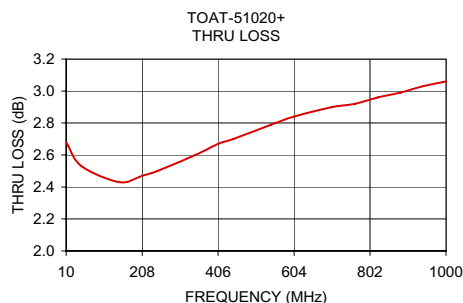

Step Attenuation* at TTL Control State

FREQ.	000	001	010	011	100	101	110	111
(MHz)	THRU LOSS (dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)	(dB)
10.00	2.68	4.96	9.93	14.90	20.10	24.96	29.77	34.53
49.60	2.53	4.98	9.95	14.90	20.05	24.95	29.92	34.69
148.60	2.43	4.98	9.94	14.93	20.04	25.05	29.90	34.88
208.00	2.47	4.96	9.93	14.89	20.00	24.91	29.92	34.86
247.60	2.50	4.94	9.94	14.88	19.95	24.83	29.91	34.76
346.60	2.60	4.96	9.96	14.87	19.96	24.96	29.92	34.42
406.00	2.67	4.96	9.94	14.82	19.97	24.91	29.80	34.60
445.60	2.70	4.94	9.92	14.80	19.96	24.96	29.84	34.47
544.60	2.79	4.95	9.91	14.81	19.88	24.85	29.76	34.43
604.00	2.84	4.97	9.94	14.84	19.88	24.90	29.83	34.54
703.00	2.90	4.94	9.94	14.82	19.88	24.90	29.72	34.86
762.40	2.92	4.96	9.96	14.81	19.83	24.85	29.80	35.22
821.80	2.96	5.01	9.98	14.88	19.87	24.92	29.99	35.21
881.20	2.99	5.03	10.01	14.96	19.94	24.92	30.10	35.13
940.60	3.03	5.04	10.07	14.98	19.30	24.98	30.03	35.08
1000.00	3.06	5.09	10.16	15.08	20.00	25.28	29.95	35.55

INPUT VSWR

FREQ.	001	010	011	100	101	110	111
(MHz)							
10.00	1.11	1.15	1.09	1.20	1.10	1.14	1.09
49.60	1.08	1.10	1.06	1.13	1.07	1.10	1.06
148.60	1.08	1.10	1.06	1.12	1.07	1.10	1.06
208.00	1.10	1.12	1.08	1.15	1.09	1.12	1.08
247.60	1.12	1.14	1.09	1.17	1.10	1.13	1.09
346.60	1.15	1.18	1.12	1.21	1.13	1.18	1.12
406.00	1.17	1.21	1.14	1.24	1.16	1.20	1.14
445.60	1.18	1.22	1.16	1.26	1.17	1.22	1.16
544.60	1.21	1.26	1.19	1.30	1.20	1.25	1.19
604.00	1.22	1.28	1.21	1.32	1.22	1.27	1.21
703.00	1.22	1.30	1.23	1.35	1.24	1.30	1.21
762.40	1.22	1.31	1.25	1.36	1.25	1.31	1.25
821.80	1.22	1.32	1.26	1.36	1.26	1.32	1.27
881.20	1.22	1.32	1.27	1.37	1.27	1.33	1.28
940.60	1.22	1.32	1.28	1.36	1.27	1.33	1.29
1000.00	1.21	1.32	1.29	1.36	1.28	1.33	1.30

OUTPUT VSWR

FREQ.	001	010	011	100	101	110	111
(MHz)							
10.00	1.21	1.15	1.15	1.07	1.08	1.08	1.08
49.60	1.14	1.11	1.10	1.05	1.05	1.05	1.05
148.60	1.15	1.10	1.10	1.05	1.05	1.05	1.05
208.00	1.17	1.13	1.12	1.06	1.06	1.06	1.16
247.60	1.19	1.14	1.14	1.07	1.07	1.06	1.07
346.60	1.26	1.19	1.19	1.10	1.10	1.10	1.09
406.00	1.30	1.22	1.22	1.12	1.11	1.12	1.11
445.60	1.32	1.24	1.24	1.13	1.13	1.13	1.12
544.60	1.37	1.28	1.28	1.15	1.15	1.15	1.15
604.00	1.39	1.30	1.30	1.16	1.16	1.16	1.17
703.00	1.42	1.35	1.34	1.20	1.20	1.20	1.20
762.40	1.43	1.37	1.37	1.22	1.20	1.22	1.22
821.80	1.43	1.37	1.38	1.23	1.23	1.23	1.23
881.20	1.42	1.38	1.39	1.24	1.25	1.25	1.25
940.60	1.41	1.39	1.41	1.26	1.27	1.27	1.27
1000.00	1.40	1.40	1.42	1.27	1.27	1.28	1.28

* Step attenuation above thru-loss (TTL logic 000)

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Digital Step Attenuator

TOAT-51020+

Typical Performance Data

FREQUENCY (MHz)	STEP ATTENUATION* AT TTL CONTROL STATE							
	(dB)							
	000 THRU LOSS	001 5 dB	010 10 dB	011 15 dB	100 20 dB	101 25 dB	110 30 dB	111 35 dB
10.0	2.68	4.96	9.93	14.90	20.10	24.96	29.77	34.53
49.6	2.53	4.98	9.95	14.90	20.05	24.95	29.92	34.69
148.6	2.43	4.98	9.94	14.93	20.04	25.05	29.90	34.88
208.0	2.47	4.96	9.93	14.89	20.00	24.91	29.92	34.86
247.6	2.50	4.94	9.94	14.88	19.95	24.83	29.91	34.76
346.6	2.60	4.96	9.96	14.87	19.96	24.96	29.92	34.42
406.0	2.67	4.96	9.94	14.82	19.97	24.91	29.80	34.60
445.6	2.70	4.94	9.92	14.80	19.96	24.96	29.84	34.47
544.6	2.79	4.95	9.91	14.81	19.88	24.85	29.76	34.43
604.0	2.84	4.97	9.94	14.84	19.88	24.90	29.83	34.54
703.0	2.90	4.94	9.94	14.82	19.88	24.90	29.72	34.86
762.4	2.92	4.96	9.96	14.81	19.83	24.85	29.80	35.22
821.8	2.96	5.01	9.98	14.88	19.87	24.92	29.99	35.21
881.2	2.99	5.03	10.01	14.96	19.94	24.92	30.10	35.13
940.6	3.03	5.04	10.07	14.98	19.30	24.98	30.03	35.08
1000.0	3.06	5.09	10.16	15.08	20.00	25.28	29.95	35.55

* Step Attenuation above Thru Loss (TTL Logic 000).

FREQUENCY (MHz)	INPUT VSWR AT TTL CONTROL STATE						
	(:1)						
	001 5 dB	010 10 dB	011 15 dB	100 20 dB	101 25 dB	110 30 dB	111 35 dB
10.0	1.11	1.15	1.09	1.20	1.10	1.14	1.09
49.6	1.08	1.10	1.06	1.13	1.07	1.10	1.06
148.6	1.08	1.10	1.06	1.12	1.07	1.10	1.06
208.0	1.10	1.12	1.08	1.15	1.09	1.12	1.08
247.6	1.12	1.14	1.09	1.17	1.10	1.13	1.09
346.6	1.15	1.18	1.12	1.21	1.13	1.18	1.12
406.0	1.17	1.21	1.14	1.24	1.16	1.20	1.14
445.6	1.18	1.22	1.16	1.26	1.17	1.22	1.16
544.6	1.21	1.26	1.19	1.30	1.20	1.25	1.19
604.0	1.22	1.28	1.21	1.32	1.22	1.27	1.21
703.0	1.22	1.30	1.23	1.35	1.24	1.30	1.21
762.4	1.22	1.31	1.25	1.36	1.25	1.31	1.25
821.8	1.22	1.32	1.26	1.36	1.26	1.32	1.27
881.2	1.22	1.32	1.27	1.37	1.27	1.33	1.28
940.6	1.22	1.32	1.28	1.36	1.27	1.33	1.29
1000.0	1.21	1.32	1.29	1.36	1.28	1.33	1.30

FREQUENCY (MHz)	OUTPUT VSWR AT TTL CONTROL STATE						
	(:1)						
	001 5 dB	010 10 dB	011 15 dB	100 20 dB	101 25 dB	110 30 dB	111 35 dB
10.0	1.21	1.15	1.15	1.07	1.08	1.08	1.08
49.6	1.14	1.11	1.10	1.05	1.05	1.05	1.05
148.6	1.15	1.10	1.10	1.05	1.05	1.05	1.05
208.0	1.17	1.13	1.12	1.06	1.06	1.06	1.06
247.6	1.19	1.14	1.14	1.07	1.07	1.06	1.07
346.6	1.26	1.19	1.19	1.10	1.10	1.10	1.09
406.0	1.30	1.22	1.22	1.12	1.11	1.12	1.11
445.6	1.32	1.24	1.24	1.13	1.13	1.13	1.12
544.6	1.37	1.28	1.28	1.15	1.15	1.15	1.15
604.0	1.39	1.30	1.30	1.16	1.16	1.16	1.17
703.0	1.42	1.35	1.34	1.20	1.20	1.20	1.20
762.4	1.43	1.37	1.37	1.22	1.20	1.22	1.22
821.8	1.43	1.37	1.38	1.23	1.23	1.23	1.23
881.2	1.42	1.38	1.39	1.24	1.25	1.25	1.25
940.6	1.41	1.39	1.41	1.26	1.27	1.27	1.27
1000.0	1.40	1.40	1.42	1.27	1.27	1.28	1.28

REV. X1
TOAT-51020+
061207
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Digital Step Attenuator


Typical Performance Curves

TOAT-51020+


Thru Loss

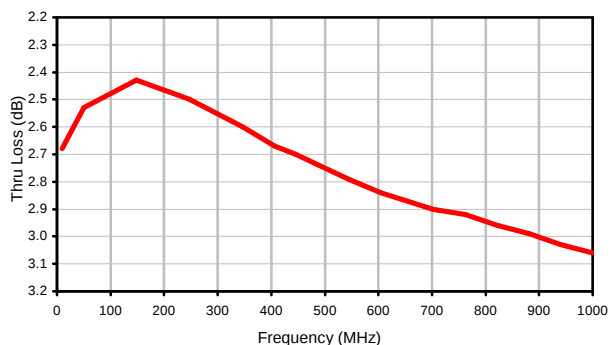


Step Attenuation

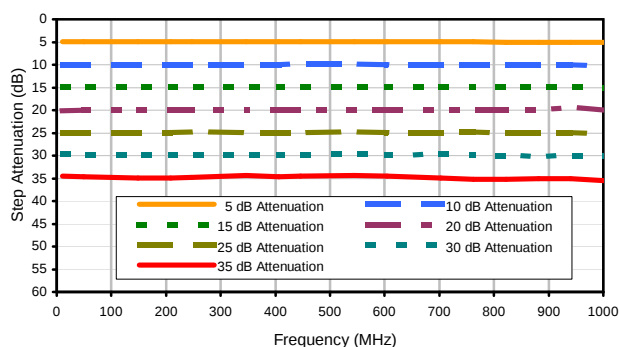

Input VSWR

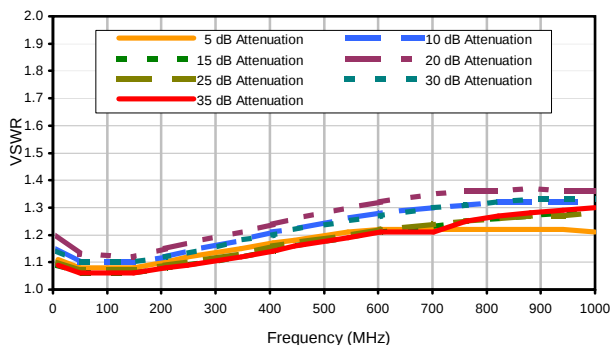

Output VSWR

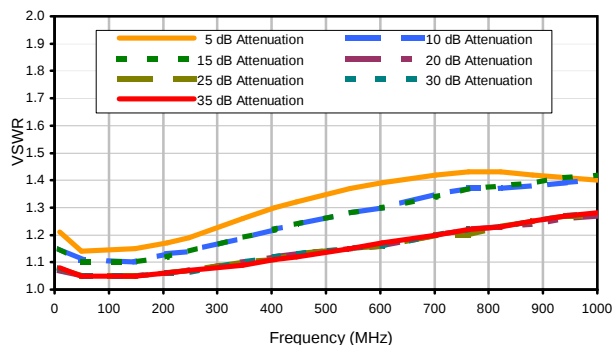

REV. X1
TOAT-51020+
061207
Page 1 of 1

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Outline Dimensions

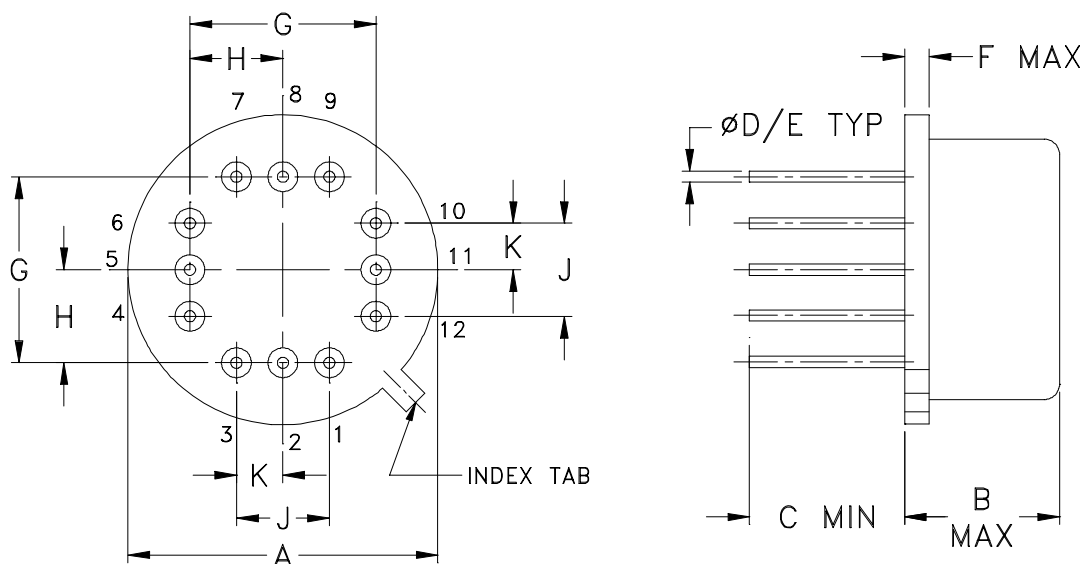

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAM
QQ95	.500 (12.70)	.250 (6.35)	.25 (6.35)	.016 (.41)	.020 (.51)	.04 (1.02)	.300 (7.62)	.150 (3.81)	.150 (3.81)	.075 (1.91)	3.5
QQ96	.600 (15.24)						.400 (10.16)	.200 (5.08)	.200 (5.08)	.100 (2.54)	4.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: Kovar.
Pin material: Kovar.
Cover material: Nickel.
- Pin finish: Gold plate 25 μ inches (.64 microns) min.
- For pin designations see specification data sheet.
- Pin numbers do not appear on unit, for reference only.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 10 cycles	MIL-STD-202, Method 107, Condition A, except +100°C & 10 cycles
Constant Acceleration	5000g, Y1 axis	MIL-STD-883, Method 2001, Condition A, except Y1 axis only
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D