

Bandpass Filter

SMT

BFCN-ED13661/11

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.




CASE STYLE : FV1206-4

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C							
Parameters		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Pass Band	Center Frequency				8450		MHz
	Insertion Loss	F1-F2	8350-8550		1.6	3.5	dB
	VSWR	F1-F2	8350-8550		1.4		:1
Stop Band, Lower	Insertion Loss	DC-F5	DC-7300	15	20		dB
		F5-F3	7300-7500		30		dB
	VSWR	DC-F3	DC-7500		30		:1
Stop Band, Upper	Insertion Loss	F4-F6	9800-10000	15	30		dB
		F6-F7	10000-15000		20		dB
	VSWR	F4-F7	9800-15000		30		:1

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	2W max. @ 25°C

*Passband rating, derate linearly to 0.5W at 100°C ambient

Functional Schematic

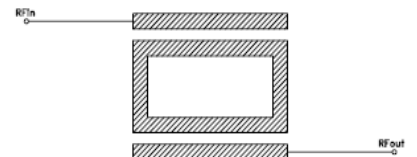

PIN CONNECTIONS	
RF IN	1
RF OUT	3
GROUND	2,4