

NON-CATALOG

Frequency Synthesizer

DSN-2050A-119+

50Ω 1130 to 2100 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction



CASE STYLE: KL942

Product Overview

The DSN-2050A-119+ is a Frequency Synthesizer, designed to operate from 1130 to 2100 MHz for digital TV application. The DSN-2050A-119+ is packaged in a metal case (size of 1.25" x 1.00" x 0.20") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -100 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -60 dBc typ.• Reference Spurious: -98 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of DSN-2050A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 1130 to 2100 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+24V)



CASE STYLE: KL942

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Applications

- Digital TV

General Description

The DSN-2050A-119+ is a Frequency Synthesizer, designed to operate from 1130 to 2100 MHz for digital TV application. The DSN-2050A-119+ is packaged in a metal case (size of 1.25" x 1.00" x 0.20") to shield against unwanted signals and noise. To enhance the robustness of DSN-2050A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

Simplified Schematic

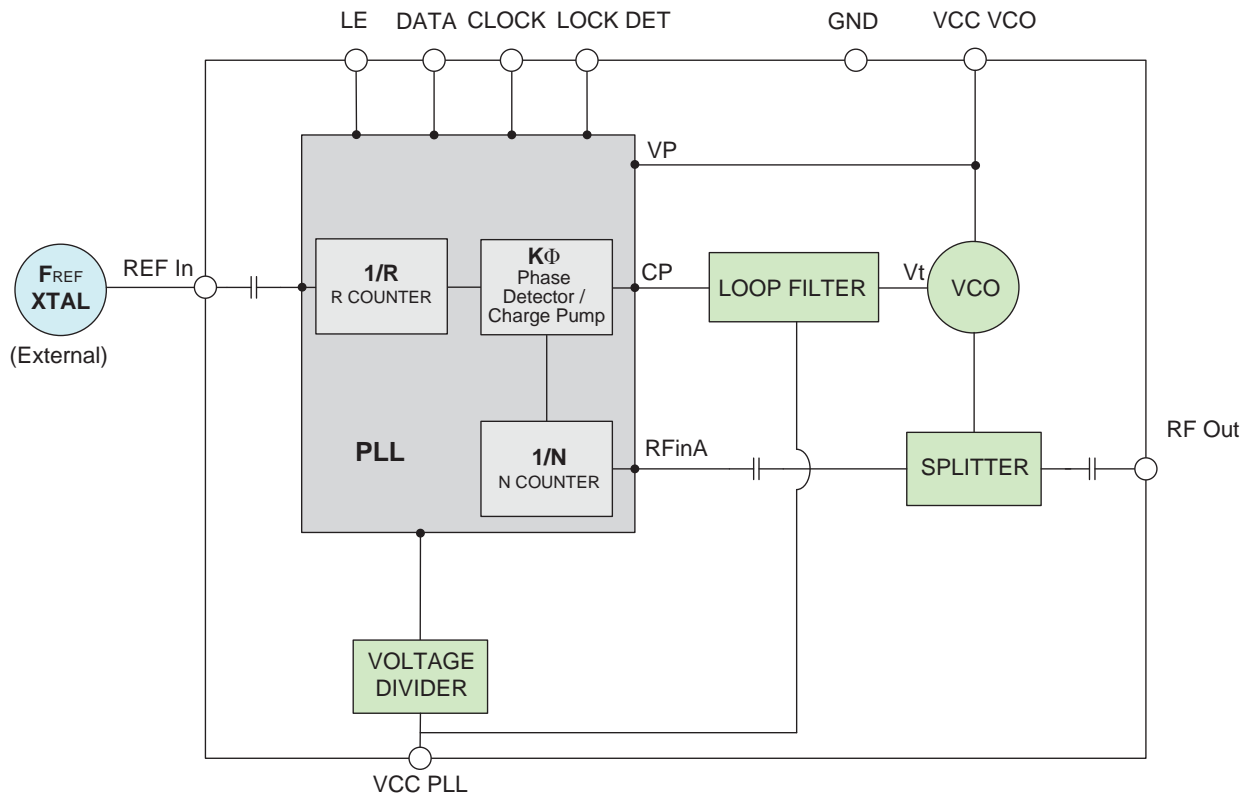

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters		Test Conditions	Min.	Typ.	Max.	Units								
Frequency Range		-	1130	-	2100	MHz								
Step Size		-	-	12.5	-	kHz								
Settling Time		Within ± 1 kHz	-	600	-	mSec								
Output Power		-	-2.5	+0.5	+3.5	dBm								
SSB Phase Noise		@ 100 Hz offset	-	-44	-	dBc/Hz								
		@ 1 kHz offset	-	-74	-67									
		@ 10 kHz offset	-	-100	-93									
		@ 100 kHz offset	-	-120	-114									
		@ 1 MHz offset	-	-140	-130									
Reference Spurious Suppression		Ref. Freq. 13 MHz	-	-98	-68	dBc								
Comparison Spurious Suppression		Step Size 12.5 kHz	-	-60	-									
Non - Harmonic Spurious Suppression		-	-	-90	-									
Harmonic Suppression		-	-	-20	-8									
VCO Supply Voltage		+5.00	+4.75	+5.00	+5.25		V							
PLL Supply Voltage		+24.00	+23.75	+24.00	+24.25									
VCO Supply Current		-	-	31	40	mA								
PLL Supply Current		-	-	27	35									
Reference Input (External)		Frequency	13 (square wave)	-	13	-	MHz							
		Amplitude	1	-	1	-	V _{P-P}							
		Input impedance	-	-	100	-	-	KΩ						
		Phase Noise @ 1 kHz offset	-	-	-130	-	-	dBc/Hz						
RF Output port Impedance		-	-	50	-	Ω								
Input Logic Level		Input high voltage	-	2.5	-	-	V							
		Input low voltage	-	-	-	0.6	V							
Digital Lock Detect		Locked	-	2.6	-	3.5	V							
		Unlocked	-	-	-	0.4	V							
Frequency Synthesizer PLL		-	ADF4113											
PLL Programming		-	3-wire serial 3V CMOS											
Register Map ^{NOTE 1}	F_Register ^{NOTE 2}	Prescaler Value	Power-Down 2	Current Setting 2	Current Setting 1	Timer Counter Control	Fastlock Mode	Fastlock Enable	CP Three-State	PD Polarity	Muxout Control	Power-Down 1	Counter Reset	Control Bits
		10	0	111	111	0000	0	0	0	1	001	0	0	10
	N_Register @ 2100 MHz	Reserved	CP Gain	13-Bit B Counter							6-Bit A Counter			Control Bits
		00	1	1010010000010							000000			01
R_Register	Reserved	DLY	SYNC	Lock Detect Precision	Test Mode Bits	Anti-Backlash Width	14-BIT Reference Counter, R						Control Bits	
	0	0	0	1	00	00	00010000010000						00	

Note 1: Registers Load Sequence: Initialization Register, F Register, R Register, N Register.

Note 2: For the Initialization Register use Register F with Control Bits 11.

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage ^{NOTE 3}	5.5V
PLL Supply Voltage ^{NOTE 3}	25.0V
VCO Supply Voltage to PLL Supply Voltage	Note 3
Reference Frequency Amplitude	3.3V _{P-P}
Data, Clock, LE Levels	0Vmin, +3.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded

Note 3: Power on/off Sequence: Power on: VCO Supply Voltage, followed by PLL Supply Voltage. Power off: PLL Supply Voltage, followed by VCO Supply Voltage.

NON-CATALOG

Frequency Synthesizer

DSN-2050A-119+

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	1130	1.59	1.65	1.40	30.00	32.11	33.10	23.20	25.88
1147	1.55	1.58	1.33	30.08	32.18	33.15	23.21	25.89	28.53
1264	1.14	1.19	0.92	30.71	32.73	33.62	23.25	25.95	28.62
1381	0.95	1.00	0.72	31.30	33.25	34.08	23.29	26.00	28.69
1498	0.70	0.74	0.49	31.75	33.66	34.45	23.32	26.04	28.74
1615	0.40	0.45	0.25	32.05	33.97	34.74	23.35	26.09	28.79
1732	0.25	0.37	0.18	32.18	34.17	34.96	23.38	26.12	28.83
1849	-0.04	0.13	-0.04	32.13	34.22	35.09	23.40	26.15	28.87
1966	-0.24	-0.05	-0.17	31.82	34.06	35.02	23.43	26.19	28.92
2083	-0.55	-0.34	-0.41	31.38	33.75	34.82	23.45	26.22	28.95
2100	-0.52	-0.28	-0.39	31.30	33.68	34.77	23.44	26.22	28.96

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1130	-17.67	-19.46	-20.57	-25.55	-27.64	-29.35
1147	-17.29	-19.11	-20.24	-28.84	-30.57	-32.23
1264	-14.10	-15.95	-16.99	-31.56	-33.97	-35.36
1381	-12.67	-14.51	-15.52	-36.28	-37.56	-38.35
1498	-12.54	-14.39	-15.50	-38.88	-39.78	-40.18
1615	-14.60	-16.46	-17.75	-39.48	-38.72	-38.42
1732	-19.03	-20.91	-21.78	-36.00	-37.30	-37.63
1849	-21.96	-24.26	-24.90	-40.29	-40.18	-39.42
1966	-24.40	-26.04	-26.93	-37.09	-37.44	-38.04
2083	-29.89	-30.97	-31.35	-36.85	-39.52	-38.63
2100	-30.02	-31.08	-31.31	-39.63	-40.62	-41.64



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

NON-CATALOG

Frequency Synthesizer

DSN-2050A-119+

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1130	-47.49	-72.05	-99.02	-119.68	-136.85
1147	-45.08	-71.77	-98.78	-119.64	-139.76
1264	-48.94	-74.26	-100.05	-120.67	-140.80
1381	-45.91	-74.78	-100.68	-121.53	-141.74
1498	-46.18	-73.91	-100.89	-121.97	-142.18
1615	-43.95	-74.51	-100.97	-122.09	-142.44
1732	-42.79	-76.45	-100.78	-121.92	-142.55
1849	-42.82	-72.97	-100.43	-121.61	-142.36
1966	-44.05	-72.86	-100.28	-121.41	-142.24
2083	-39.05	-74.41	-100.22	-121.28	-141.96
2100	-40.45	-74.83	-100.26	-121.32	-141.97

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1130	-45.69	-73.61	-100.44	-121.39	-135.03
1147	-46.29	-73.50	-100.69	-121.54	-141.53
1264	-45.46	-74.01	-101.09	-122.32	-142.28
1381	-44.71	-74.48	-102.03	-122.77	-142.80
1498	-44.46	-75.15	-101.91	-123.24	-143.03
1615	-44.39	-76.16	-102.03	-123.08	-143.21
1732	-41.23	-75.81	-101.90	-122.87	-143.10
1849	-40.25	-73.99	-101.39	-122.70	-143.09
1966	-40.19	-75.22	-100.94	-122.32	-142.81
2083	-36.60	-76.31	-100.89	-122.01	-142.41
2100	-40.84	-76.57	-100.98	-122.02	-142.49

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1130	-39.82	-71.93	-97.60	-118.01	-137.18
1147	-43.93	-71.80	-97.67	-118.02	-138.16
1264	-41.88	-71.87	-98.57	-119.38	-139.49
1381	-41.22	-74.30	-99.67	-120.39	-140.53
1498	-38.99	-73.74	-100.12	-120.98	-141.20
1615	-37.98	-74.11	-100.05	-121.06	-141.56
1732	-40.95	-72.98	-99.84	-120.90	-141.74
1849	-39.87	-73.45	-99.33	-120.73	-141.85
1966	-38.06	-73.06	-99.09	-120.49	-141.68
2083	-39.92	-74.11	-98.95	-120.44	-141.50
2100	-36.33	-72.41	-99.08	-120.61	-141.42



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

NON-CATALOG

Frequency Synthesizer

DSN-2050A-119+

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 1130MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 1615MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 2100MHz+(n*Fcomparison) (dBc) note 1			
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	-5	-84.96	-85.61	-85.85	-85.35	-82.49	-86.27	-83.09	-87.03	-83.94
-4	-84.07	-85.49	-83.03	-84.90	-86.31	-86.75	-81.66	-87.38	-81.79	
-3	-85.30	-83.64	-76.28	-81.87	-85.10	-86.60	-83.29	-82.87	-82.46	
-2	-83.34	-84.92	-68.21	-86.66	-87.46	-83.54	-83.24	-81.15	-83.25	
-1	-83.51	-81.70	-61.66	-78.97	-81.11	-67.26	-68.83	-80.53	-67.46	
0 ^{note 2}	-	-	-	-	-	-	-	-	-	
+1	-75.09	-83.82	-61.46	-80.72	-82.04	-67.22	-70.55	-81.00	-66.53	
+2	-88.72	-84.73	-78.44	-77.16	-84.15	-85.46	-79.83	-86.30	-83.41	
+3	-86.97	-86.91	-85.68	-87.50	-86.50	-83.65	-87.42	-87.06	-87.47	
+4	-87.66	-82.48	-85.22	-86.21	-85.99	-85.22	-86.36	-86.87	-82.89	
+5	-86.86	-83.03	-87.31	-87.34	-82.52	-86.99	-86.88	-84.25	-85.51	

Note 1: Comparison frequency 12.5 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 1130MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 1615MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 2100MHz+(n*Freference) (dBc) note 3			
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	-5	-124.03	-125.92	-126.07	-110.36	-111.89	-112.20	-98.71	-102.14	-103.38
-4	-127.78	-126.40	-128.39	-128.34	-128.49	-126.80	-118.27	-120.22	-121.04	
-3	-118.37	-118.55	-119.04	-107.82	-109.31	-110.25	-96.45	-99.22	-100.02	
-2	-131.00	-129.52	-129.63	-129.13	-129.50	-128.10	-116.65	-121.85	-122.11	
-1	-108.26	-108.62	-109.49	-98.23	-99.45	-100.29	-86.79	-90.78	-91.74	
0 ^{note 4}	-	-	-	-	-	-	-	-	-	
+1	-107.11	-107.46	-108.88	-97.04	-99.27	-100.42	-84.64	-87.90	-88.77	
+2	-128.19	-130.18	-130.34	-128.03	-126.17	-127.57	-115.62	-117.62	-118.25	
+3	-116.91	-116.25	-118.77	-107.22	-109.06	-110.67	-94.52	-97.52	-99.60	
+4	-130.09	-129.39	-129.60	-127.30	-126.59	-127.36	-116.25	-118.50	-120.08	
+5	-123.02	-123.23	-124.23	-111.04	-112.92	-113.25	-98.63	-102.00	-104.02	

Note 3: Reference frequency 13 MHz

Note 4: All spurs are referenced to carrier signal (n=0).






For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


Typical Performance Curves

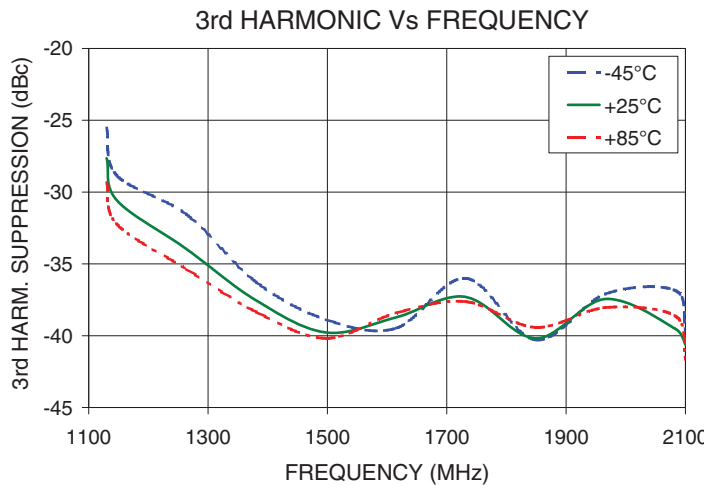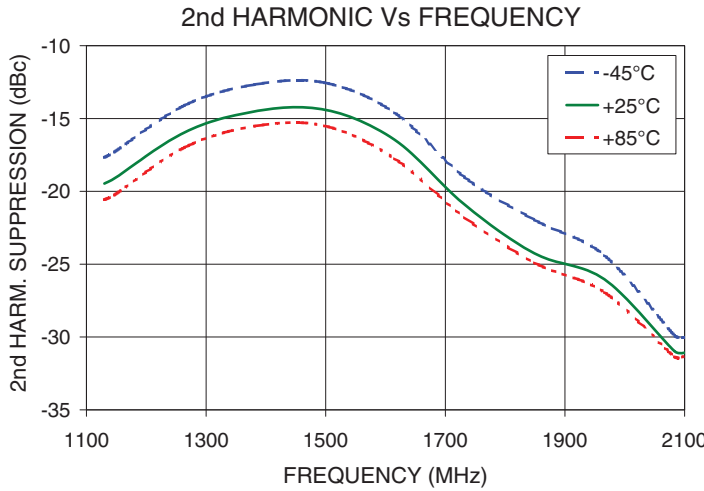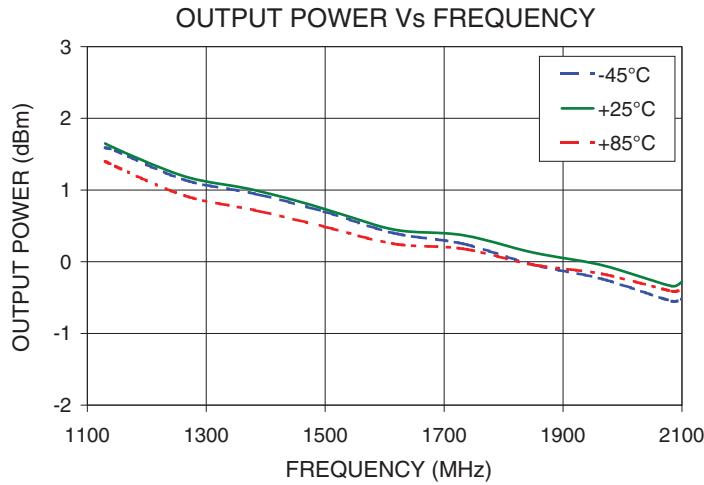


PHASE NOISE @ 100Hz offset

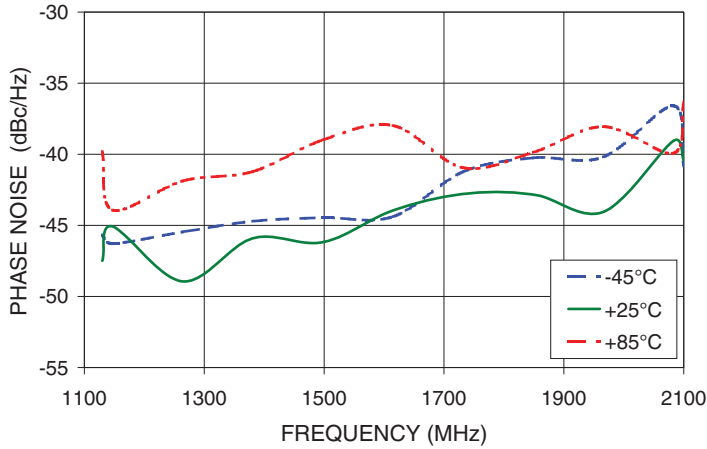


PHASE NOISE @ 1kHz offset

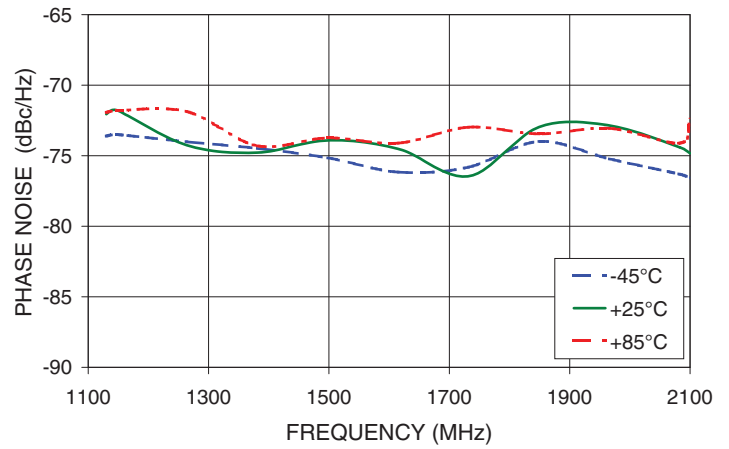


PHASE NOISE @ 10kHz offset

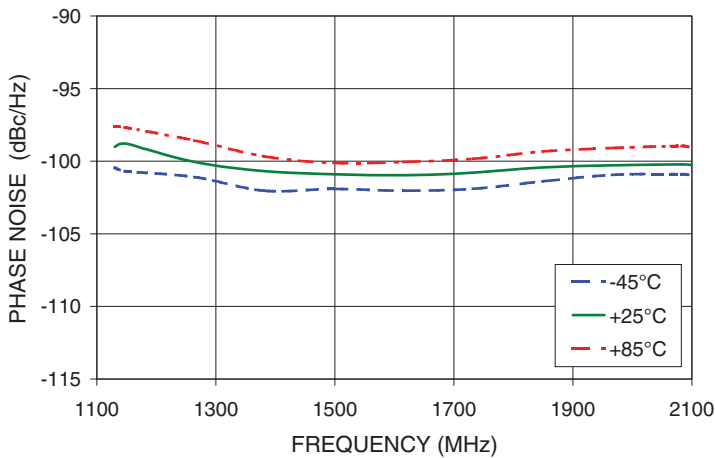

PHASE NOISE @ 100kHz offset

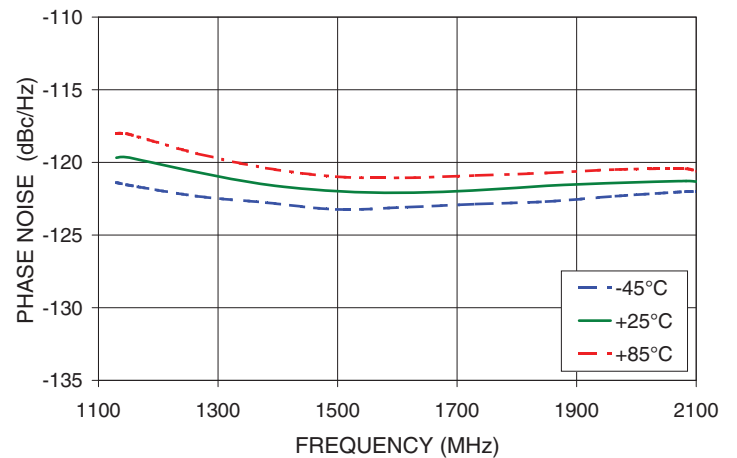







PHASE NOISE @ 1MHz offset

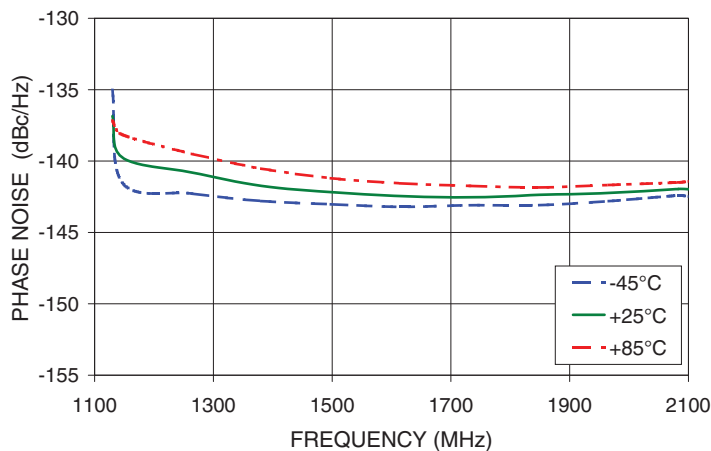

NON-CATALOG

Frequency Synthesizer

DSN-2050A-119+

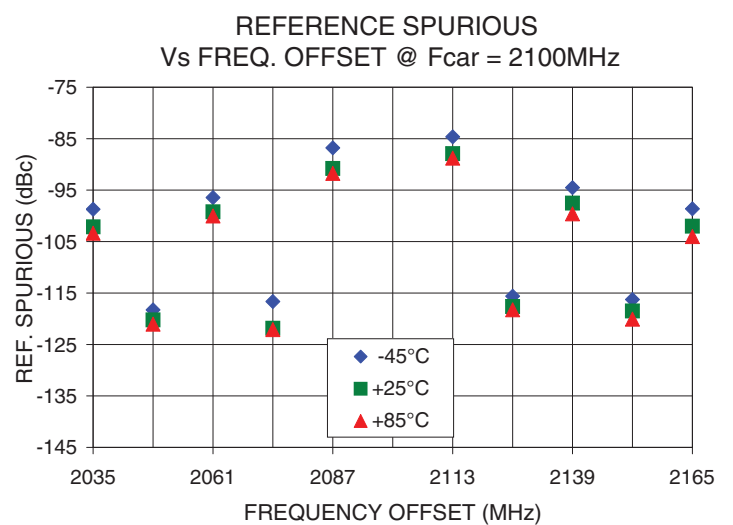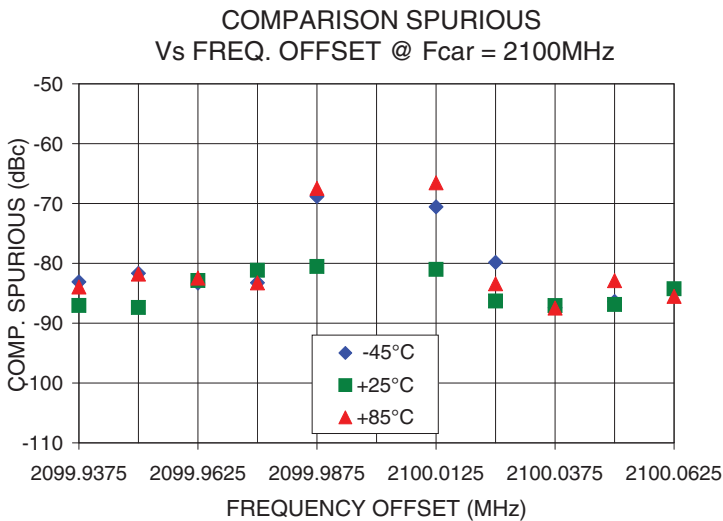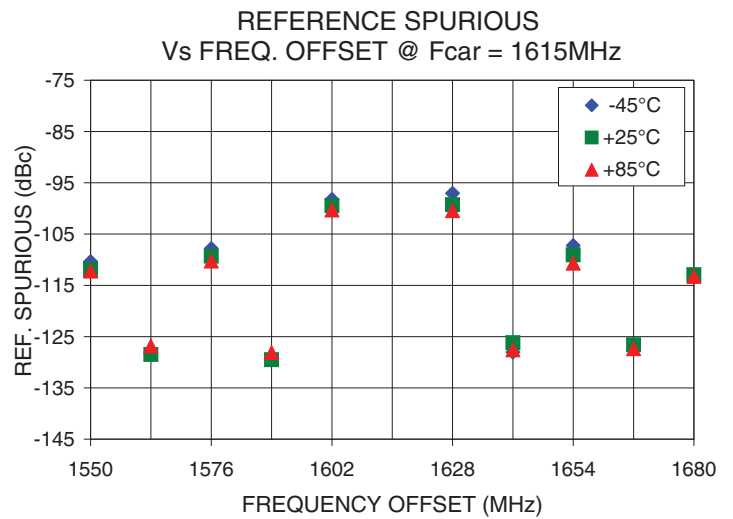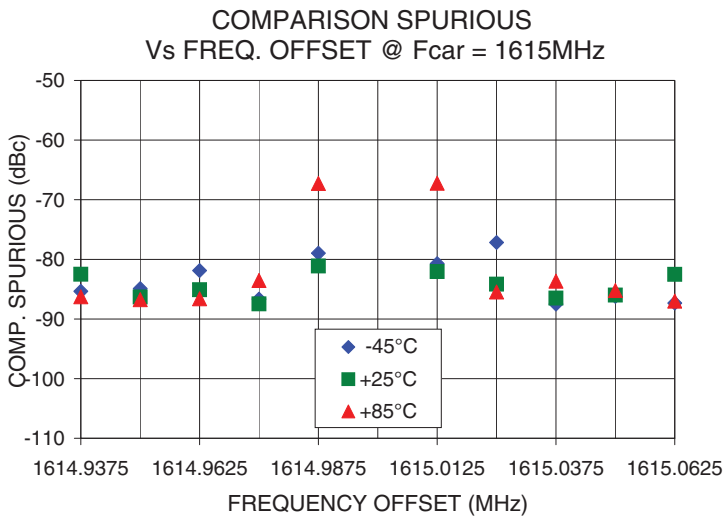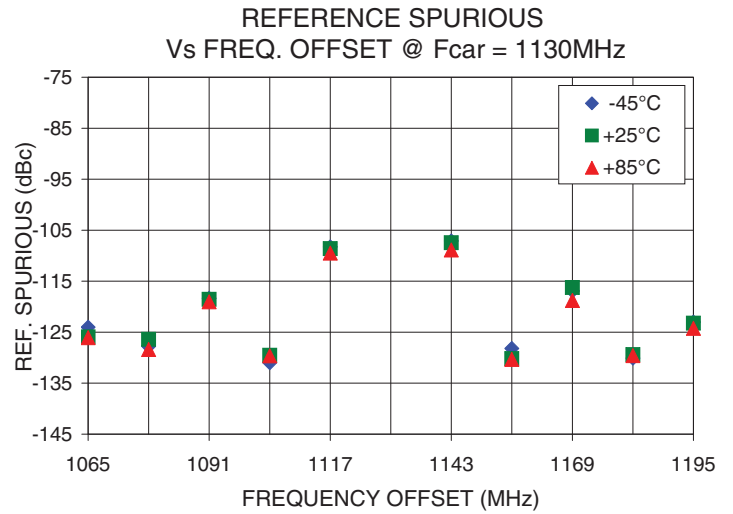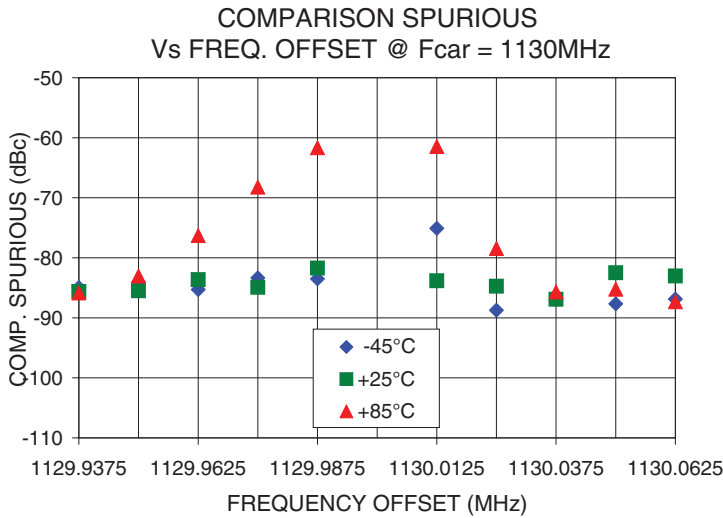


For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

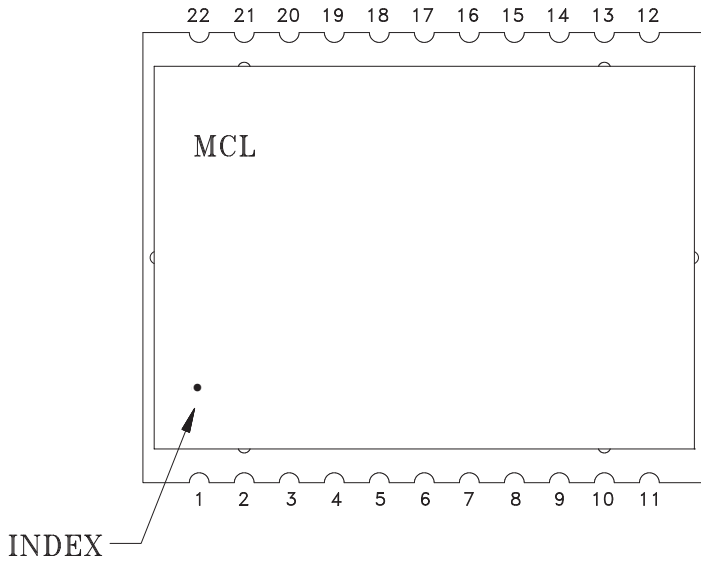


Pin Connection


Pin Number	Function	Pin Number	Function
1	GND	12	LE
2	GND	13	GND
3	GND	14	REF IN
4	GND	15	GND
5	RF OUT	16	VCC PLL
6	GND	17	GND
7	LOCK DET	18	VCC VCO
8	GND	19	GND
9	DATA	20	GND
10	GND	21	GND
11	CLOCK	22	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

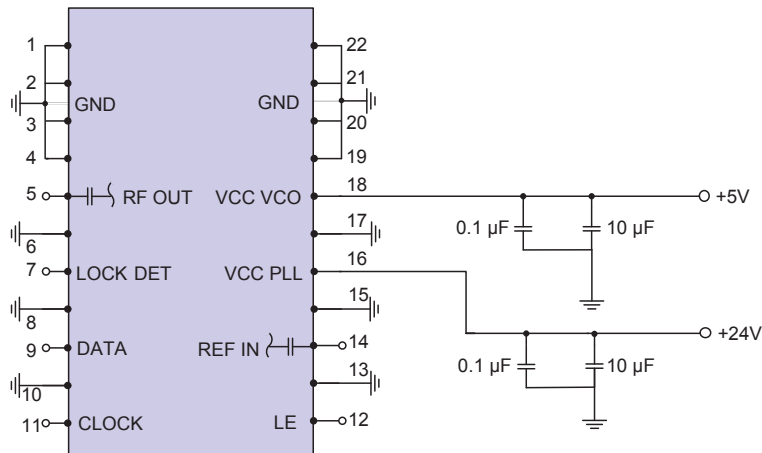

Device Marking

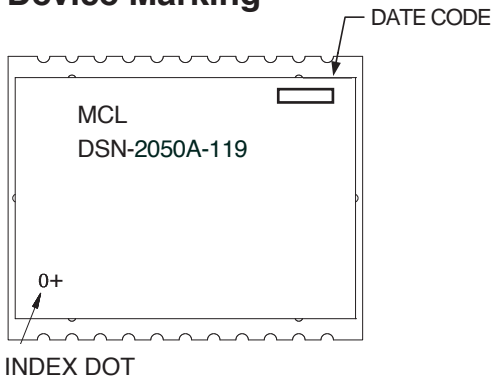

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KL942

Tape & Reel: TR-F97

Suggested Layout for PCB Design: PL-387

Evaluation Board: TB-553-1+

Environment Ratings: ENV65T2

Synthesizer evaluation software to set PLL registers manually is available at http://www.minicircuits.com/support/software_download.html