

# Ceramic High Pass Filter SMT

# HFCN-ED14070/1

### Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.




Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : FV1206

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C							
Parameters		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Stop Band	Insertion Loss	DC-F1	DC-600	40	--	--	dB
		DC-F2	DC-780	20	--	--	dB
	Frequency cutoff	F3	1080	--	3	--	dB
	VSWR	DC-F2	DC-780	--	20	--	:1
Pass Band	Insertion Loss	F5-F7	1190-4240	--	--	1.3	dB
		F4-F8	1140-4600	--	--	2	dB
	VSWR	F5-F6	1190-3200	--	1.5	--	:1

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	7W max.

### Functional Schematic

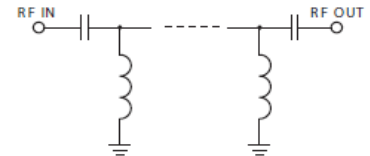

PIN CONNECTIONS	
RF IN	1
RF OUT	3
GROUND	2,4