

Frequency Synthesizer

KSN-1935A+

50Ω 1915 to 1935 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.800" x 0.584" x 0.154"



CASE STYLE: DK1042

Product Overview

The KSN-1935A+ is a Frequency Synthesizer, designed to operate from 1915 to 1935 MHz for Cable TV applications. The KSN-1935A+ is packaged in a metal case (size of 0.800" x 0.584" x 0.154") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -107 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -85 dBc typ.• Reference Spurious: -110 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-1935A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.800" x 0.584" x 0.154"	The small size enables the KSN-1935A+ to be used in compact designs.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3.3V)
- Small size 0.800" x 0.584" x 0.154"



CASE STYLE: DK1042

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Applications

- Cable TV

General Description

The KSN-1935A+ is a Frequency Synthesizer, designed to operate from 1915 to 1935 MHz for Cable TV application. The KSN-1935A+ is packaged in a metal case (size of 0.800" x 0.584" x 0.154") to shield against unwanted signals and noise. To enhance the robustness of KSN-1935A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

Simplified Schematic

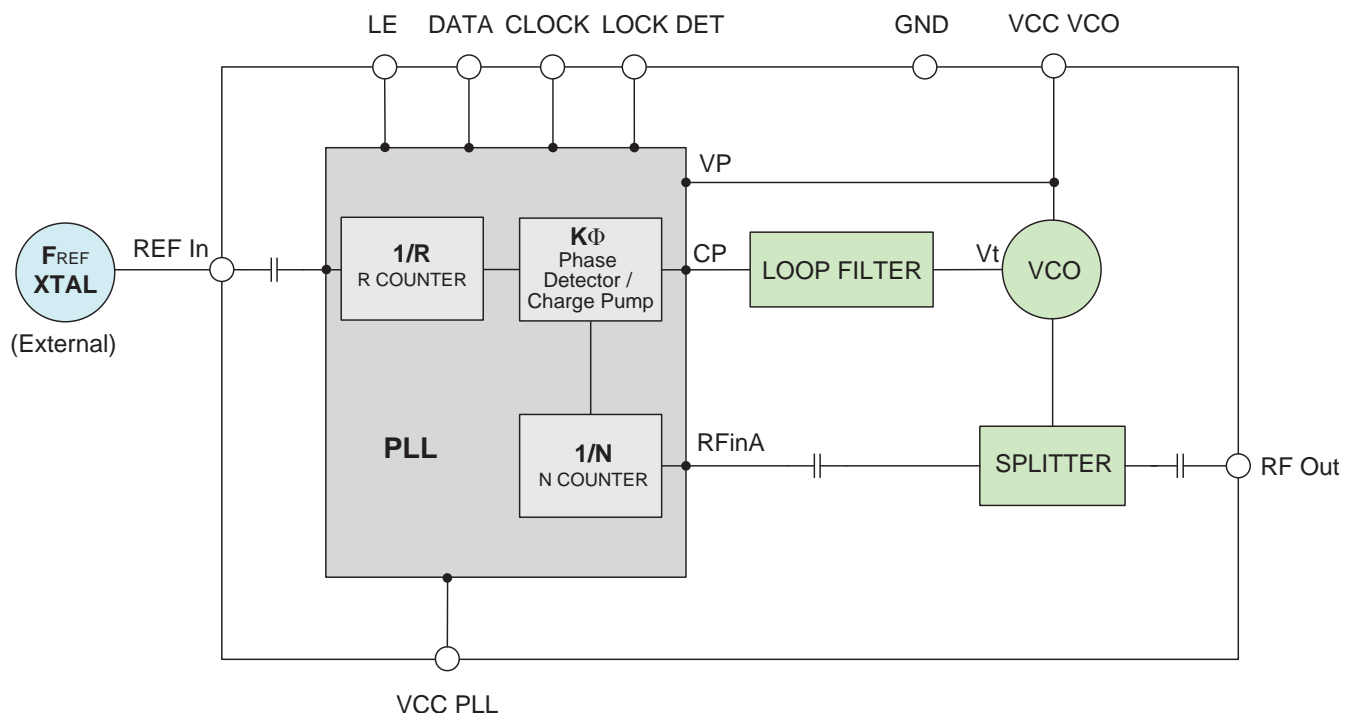

Notes

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms.jsp

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters						Test Conditions			Min.	Typ.	Max.	Units		
Frequency Range						-			1915	-	1935	MHz		
Step Size						-			-	125	-	kHz		
Settling Time						Within ± 1 kHz			-	20	-	mSec		
Output Power						-			+0.5	+3.5	+6.5	dBm		
SSB Phase Noise						@ 100 Hz offset			-	-62	-	dBc/Hz		
						@ 1 kHz offset			-	-78	-68			
						@ 10 kHz offset			-	-107	-102			
						@ 100 kHz offset			-	-130	-126			
						@ 1 MHz offset			-	-150	-146			
Integrated SSB Phase Noise						@ 100Hz to 1MHz			-	-32	-	dBc		
Reference Spurious Suppression						Ref. Freq. 20 MHz			-	-110	-90	dBc		
Comparison Spurious Suppression						Step Size 125 kHz			-	-85	-75			
Non - Harmonic Spurious Suppression						-			-	-90	-			
Harmonic Suppression						-			-	-25	-18			
VCO Supply Voltage						+5.00			+4.75	+5.00	+5.25	V		
PLL Supply Voltage						+3.30			+3.15	+3.30	+3.45			
VCO Supply Current						-			-	48	55	mA		
PLL Supply Current						-			-	8	14			
Reference Input (External)		Frequency				20 (square wave)			-	20	-	MHz		
		Amplitude				1.0			-	1.0	-	V _{P-P}		
		Input impedance				-			-	100	-	KΩ		
		Phase Noise @ 1 kHz offset				-			-	-135	-	dBc/Hz		
RF Output port Impedance						-			-	50	-	Ω		
Input Logic Level		Input high voltage				-			2.80	-	-	V		
		Input low voltage				-			-	-	0.60	V		
Digital Lock Detect		Locked				-			2.75	-	3.45	V		
		Unlocked				-			-	-	0.40	V		
Frequency Synthesizer PLL						-			ADF4118					
PLL Programming						-			3-wire serial 3.3V CMOS					
Register Map ^{NOTE 1}	F_Register ^{NOTE 2}	Reserved	Power-Down 2	Reserved	Timer Counter Control	Fastlock Mode	Reserved	Fastlock Enable	CP 3-State	PD Polarity	Muxout Control	Power-Down 1	Counter Reset	Control Bits
		0	0	000	0000	0	0	0	0	1	001	0	0	10
	N_Register @ 1935 MHz	CP Gain	13-Bit B Counter								5-Bit A Counter			Control Bits
		1	0000111100011								11000			01
	R_Register	Lock Detect Precision	Test Mode Bits			14-BIT Reference Counter, R								Control Bits
1		0000			00000010100000								00	

Note 1: Registers Load Sequence: Initialization Register, F Register, R Register, N Register.**Note 2:** For the Initialization Register use Register F with Control Bits 11.**Absolute Maximum Ratings**

Parameters	Ratings
VCO Supply Voltage ^{NOTE 3}	6V
PLL Supply Voltage ^{NOTE 3}	6V
VCO Power Supply to PLL Power Supply ^{NOTE 3}	-0.3V to +5.5V
Reference Frequency Voltage	-0.3Vmin, VCC PLL + 0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL + 0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Note 3: Power on/off Sequence:
 Power on: VCO Supply Voltage,
 followed by PLL Supply Voltage.
 Power off: PLL Supply Voltage,
 followed by VCO Supply Voltage.

Permanent damage may occur if any of these limits are exceeded

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1915	3.42	3.92	3.82	44.83	47.55	48.87	5.65	7.57	9.03
1916	3.41	3.92	3.81	44.83	47.55	48.87	5.64	7.56	9.02
1925	3.36	3.87	3.76	44.79	47.48	48.81	5.65	7.57	9.03
1934	3.28	3.80	3.69	44.74	47.40	48.74	5.66	7.57	9.04
1935	3.27	3.79	3.68	44.74	47.39	48.73	5.66	7.58	9.05

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1915	-37.45	-48.72	-37.34	-22.41	-24.66	-26.60
1916	-37.50	-48.67	-37.22	-22.53	-24.80	-26.86
1925	-37.94	-45.86	-36.95	-23.53	-25.86	-28.12
1934	-36.83	-42.79	-36.27	-23.52	-26.38	-28.75
1935	-36.71	-42.51	-36.24	-23.51	-26.40	-28.41

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS +25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-62.86	-80.63	-108.03	-130.14	-150.59
1916	-60.83	-78.83	-108.06	-130.33	-150.59
1925	-61.05	-78.23	-107.78	-130.22	-150.09
1934	-65.19	-77.73	-107.66	-129.82	-150.36
1935	-66.08	-77.61	-107.57	-129.84	-150.67

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS -45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-62.92	-79.84	-108.24	-130.16	-150.39
1916	-63.67	-79.40	-107.10	-130.23	-150.45
1925	-61.78	-78.06	-107.44	-130.32	-150.92
1934	-64.01	-77.87	-107.16	-130.23	-150.48
1935	-61.87	-77.73	-106.39	-130.37	-150.14

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS +85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-60.48	-76.46	-107.87	-129.78	-149.97
1916	-62.42	-78.55	-106.83	-129.66	-149.69
1925	-59.92	-76.41	-106.94	-129.56	-149.81
1934	-59.18	-78.24	-106.85	-129.32	-149.54
1935	-59.39	-76.89	-107.20	-129.53	-149.52

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 1915MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 1925MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 1935MHz+(n*Fcomparison) (dBc) note 1		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-108.69	-114.02	-114.91	-110.85	-107.63	-114.74	-111.22	-113.32	-113.90
-4	-110.74	-112.61	-108.85	-108.83	-108.71	-112.11	-109.36	-111.57	-110.06
-3	-102.95	-106.03	-106.70	-104.57	-107.59	-108.91	-103.59	-105.41	-107.86
-2	-97.42	-99.64	-98.02	-97.44	-99.46	-98.52	-92.49	-100.89	-98.31
-1	-88.58	-88.94	-86.37	-89.61	-88.19	-85.70	-88.42	-88.33	-85.46
0 ^{note 2}	-	-	-	-	-	-	-	-	-
+1	-89.16	-89.46	-86.99	-90.44	-86.91	-85.44	-87.99	-86.21	-87.94
+2	-95.75	-102.35	-100.66	-99.07	-100.18	-98.36	-95.90	-99.75	-99.55
+3	-105.65	-105.87	-104.86	-101.63	-107.70	-107.38	-105.43	-108.42	-103.22
+4	-109.35	-110.06	-112.49	-112.47	-111.31	-113.02	-111.47	-108.41	-109.30
+5	-113.93	-112.43	-112.76	-110.03	-116.04	-112.75	-113.06	-110.94	-115.19

Note 1: Comparison frequency 125 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 1915MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 1925MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 1935MHz+(n*Freference) (dBc) note 3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-127.03	-118.61	-123.07	-126.96	-125.18	-123.96	-121.18	-122.56	-123.46
-4	-128.45	-127.61	-130.40	-126.39	-128.62	-127.31	-127.78	-123.55	-129.30
-3	-125.40	-128.69	-121.98	-124.05	-120.44	-123.58	-123.36	-126.23	-126.89
-2	-121.95	-123.07	-120.92	-118.65	-120.73	-119.91	-120.21	-122.44	-120.22
-1	-115.36	-117.51	-125.06	-115.83	-118.40	-121.43	-113.67	-118.45	-120.57
0 ^{note 4}	-	-	-	-	-	-	-	-	-
+1	-107.16	-116.41	-110.39	-108.87	-118.79	-111.42	-107.66	-114.22	-111.26
+2	-123.76	-124.07	-122.60	-125.41	-123.21	-122.41	-121.67	-119.32	-120.86
+3	-128.22	-121.25	-130.56	-128.32	-121.88	-128.37	-126.88	-123.83	-128.29
+4	-124.32	-126.47	-131.29	-127.68	-127.66	-128.71	-123.75	-126.37	-126.62
+5	-124.85	-123.36	-121.98	-122.68	-121.72	-118.91	-121.78	-123.19	-120.46

Note 3: Reference frequency 20 MHz




Note 4: All spurs are referenced to carrier signal (n=0).

Notes






- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









Typical Performance Curves

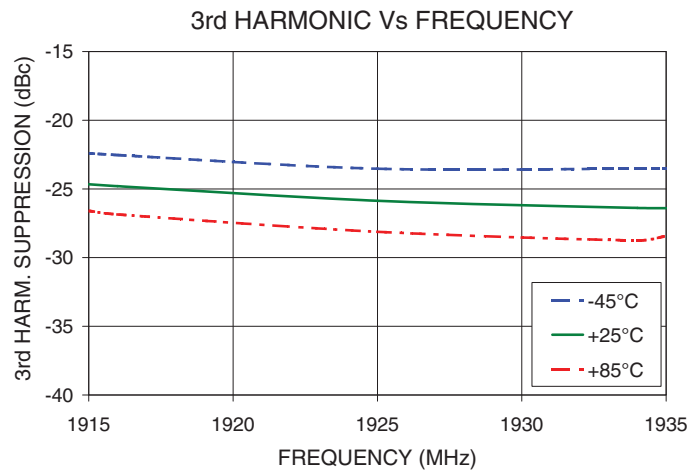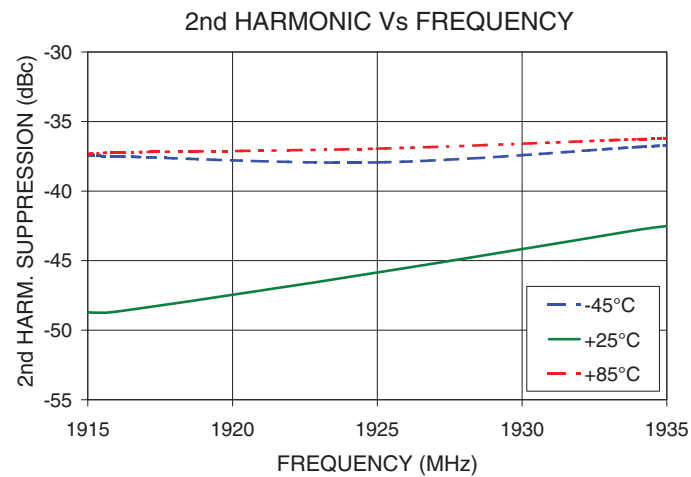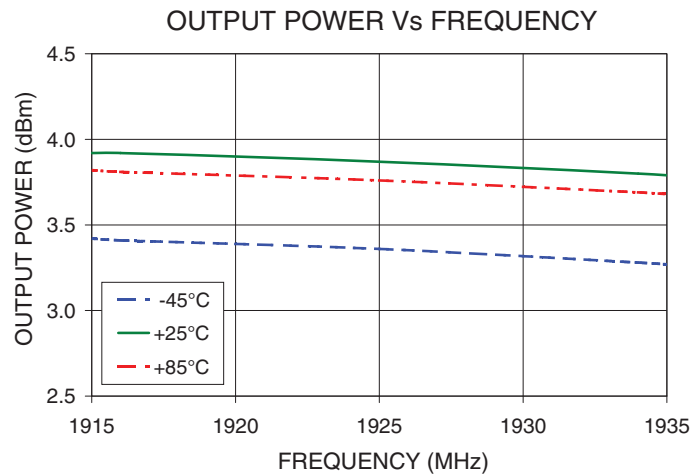

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

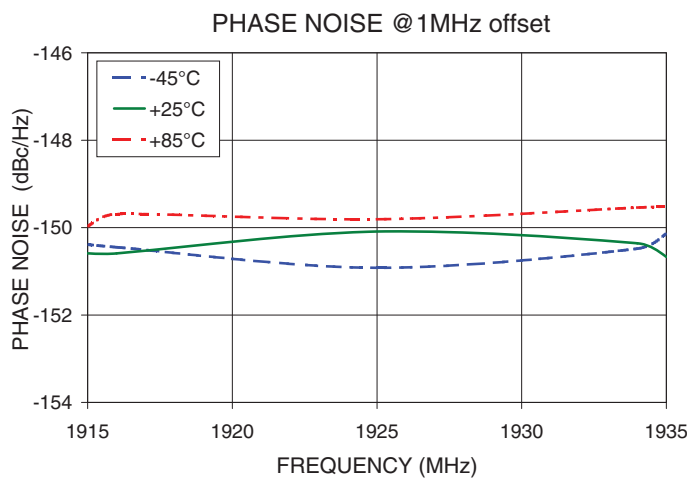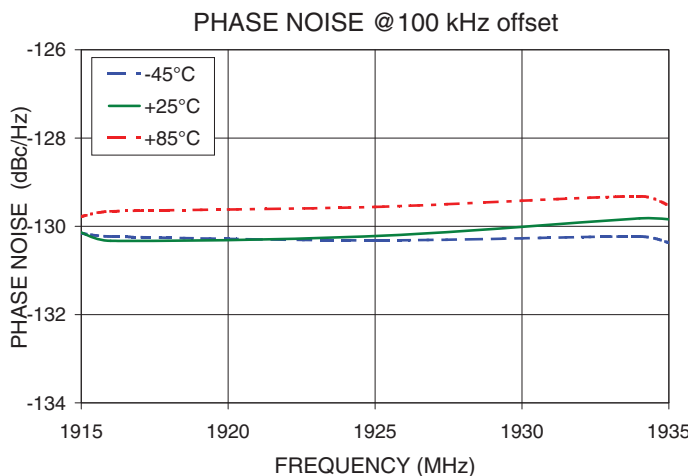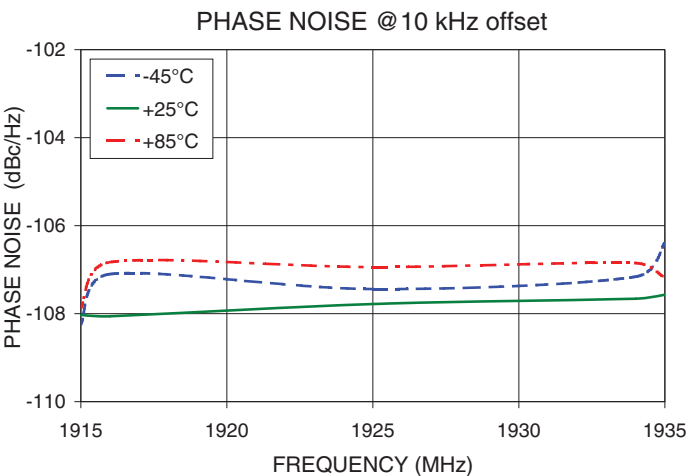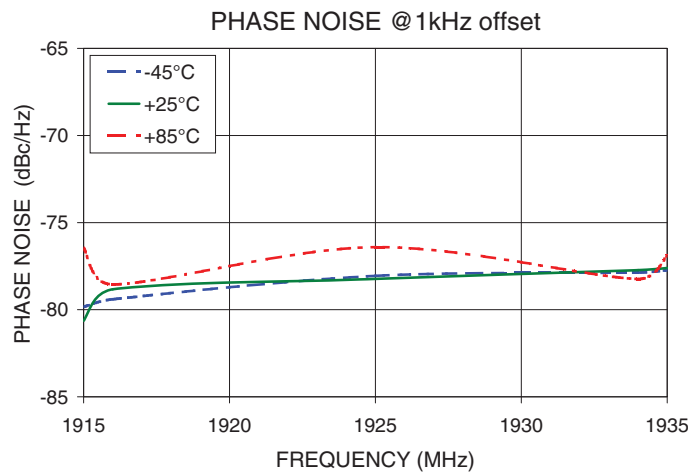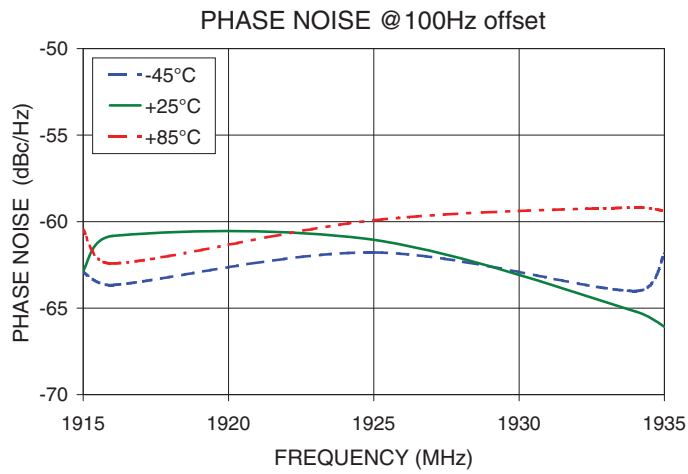

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

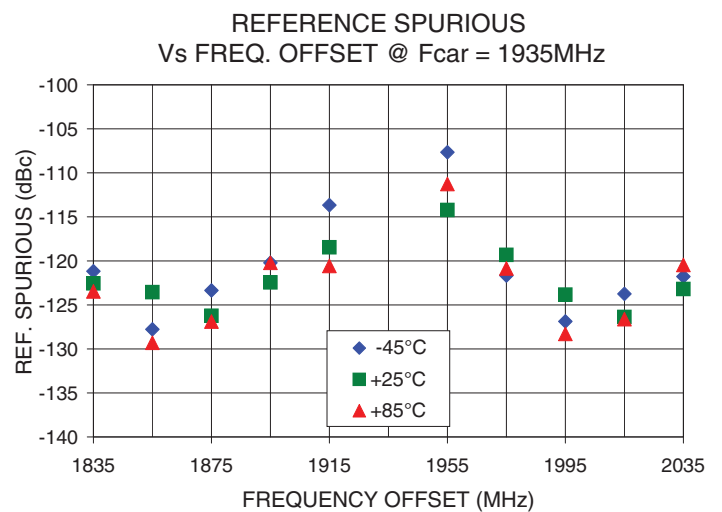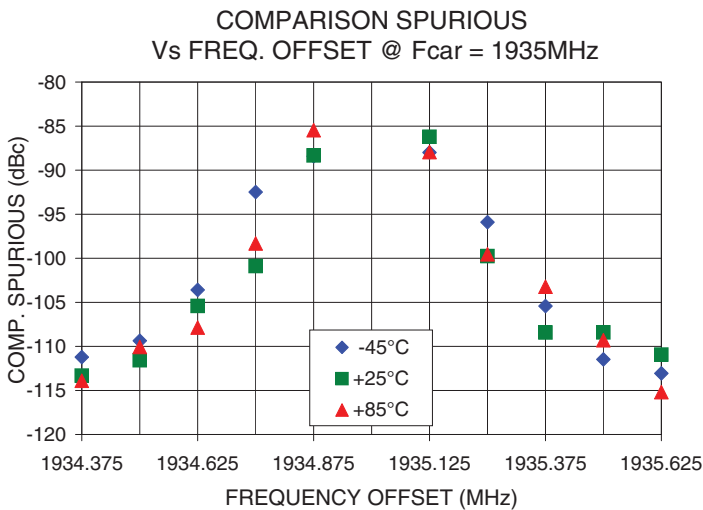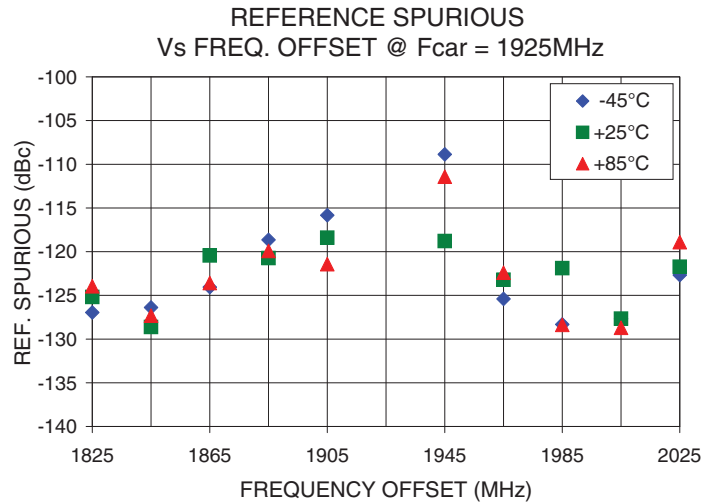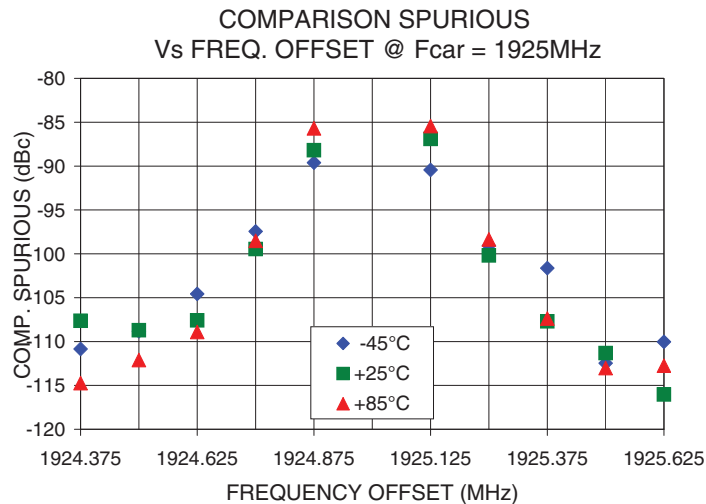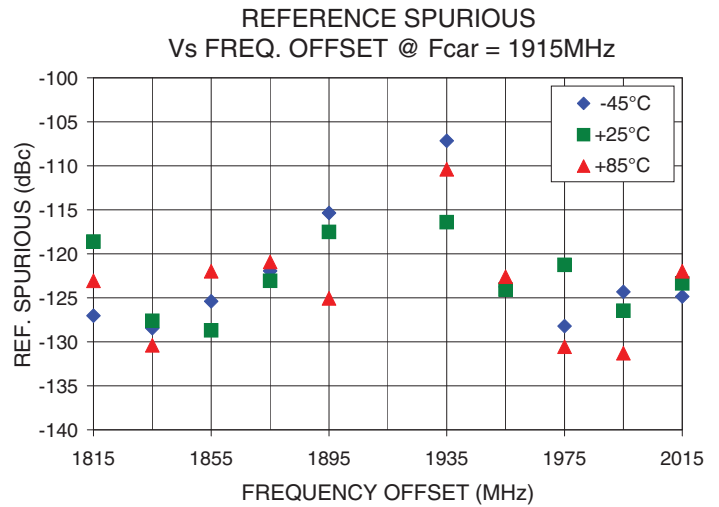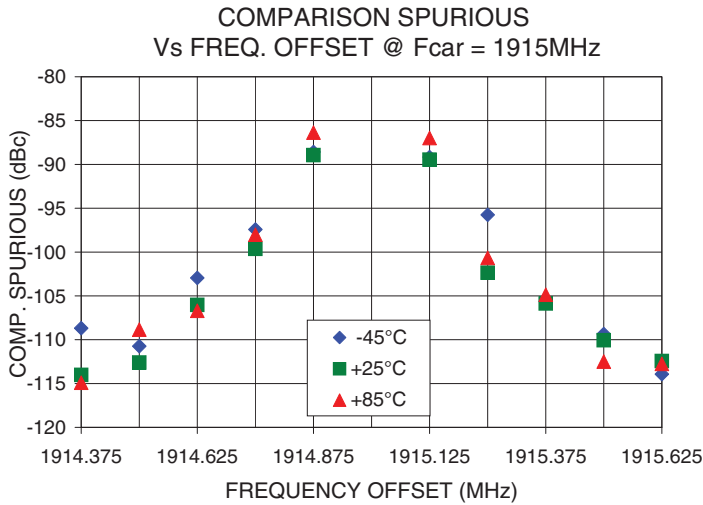


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Pin Configuration

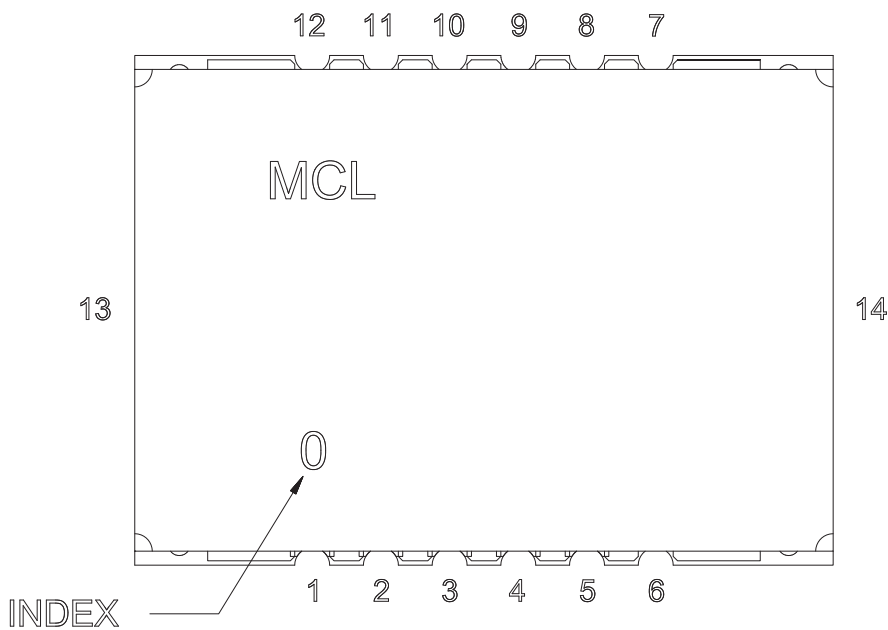


Pin Connection

Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit


Note: REF IN and RF OUT ports are internally AC coupled.

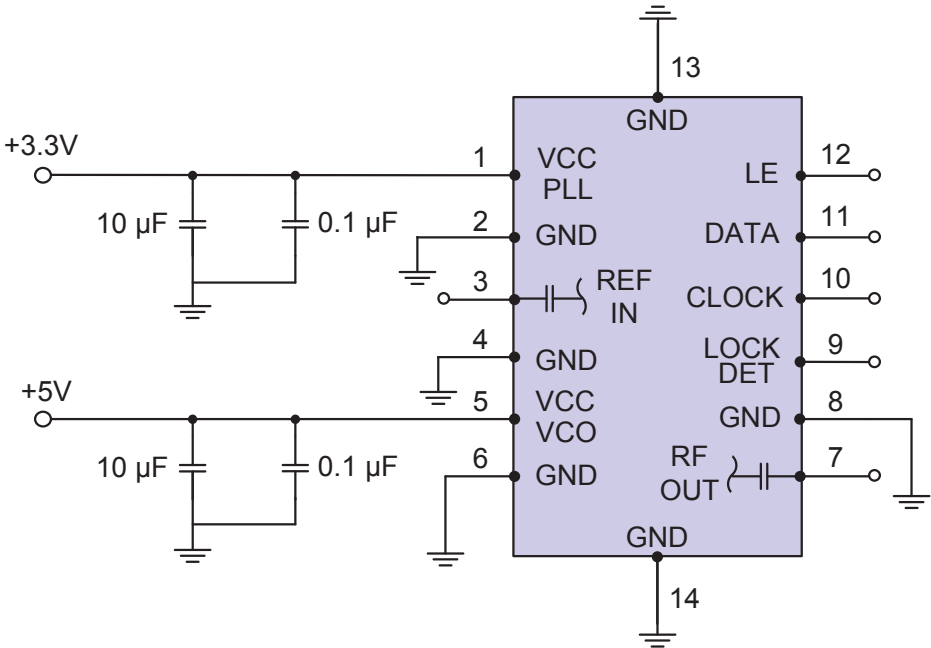

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Device Marking

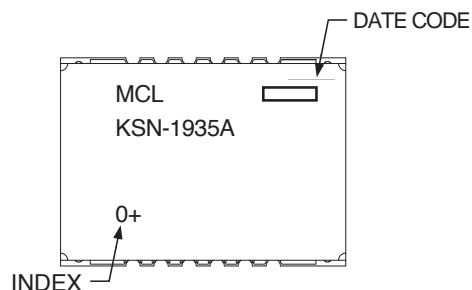

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK1042

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567-1+

Environment Ratings: ENV03T2

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

