

Frequency Synthesizer

KSN-550A-119+

50Ω 480 to 554 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK1042

Product Overview

The KSN-550A-119+ is a Frequency Synthesizer, designed to operate from 480 to 554 MHz for medical equipment applications. The KSN-550A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none"> • Phase Noise: -107 dBc/Hz typ. @ 10 kHz offset • Comparison Spurious: -98 dBc typ. • Reference Spurious: -110 dBc typ. 	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-550A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.80" x 0.58" x 0.15"	The small size enables the KSN-550A-119+ to be used in compact designs.

50Ω 480 to 554 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK1042

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Applications

- Medical equipment

General Description

The KSN-550A-119+ is a Frequency Synthesizer, designed to operate from 480 to 554 MHz for medical equipment applications. The KSN-550A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-550A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

Simplified Schematic

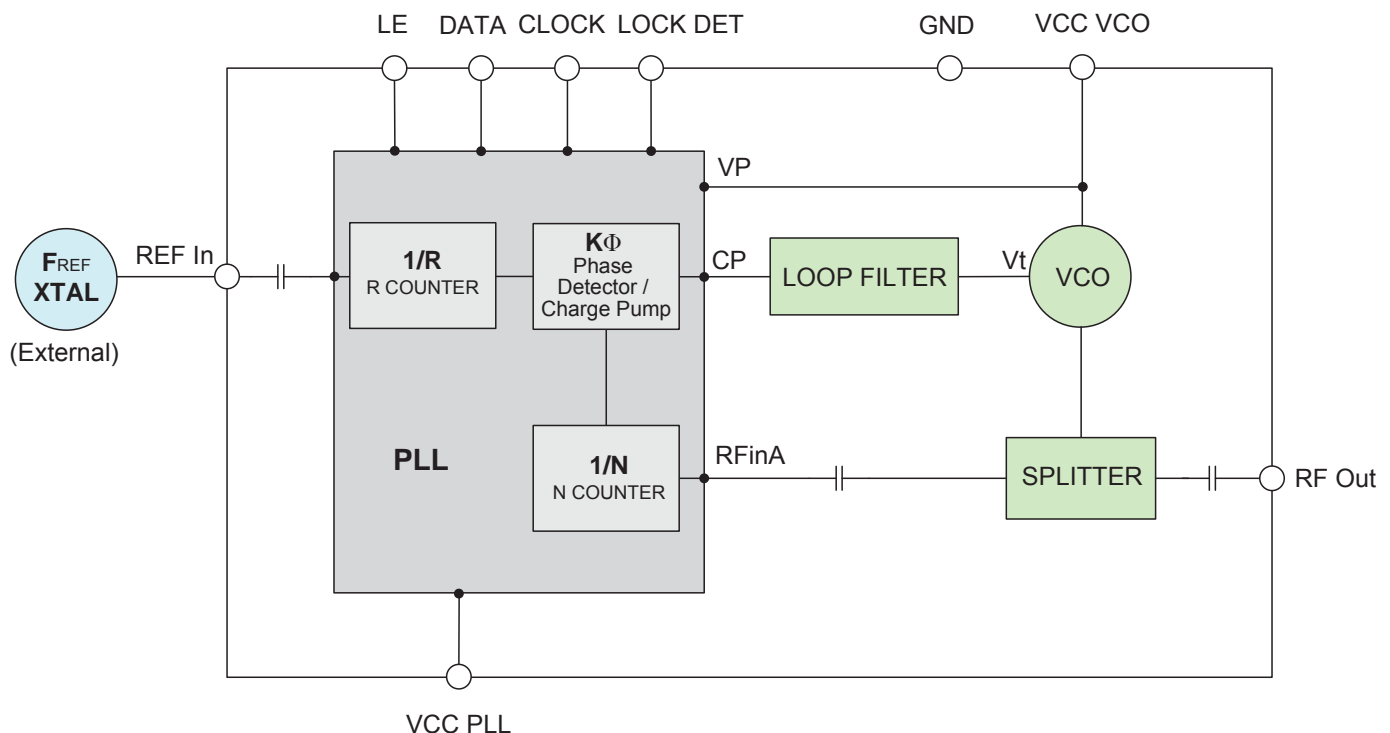

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

REV. B
M149087
EDR-9402/1REF1
KSN-550A-119+
Category-A1
RAV
150208
Page 2 of 11

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCStore/terms.iso.

Electrical Specifications (over operating temperature 0°C to +50°C)

Parameters				Test Conditions				Min.	Typ.	Max.	Units						
Frequency Range				-				480	-	554	MHz						
Step Size				-				-	500	-	kHz						
Settling Time				Within ± 1 kHz				-	5	-	mSec						
Output Power				-				+5.0	+7.5	+9.0	dBm						
SSB Phase Noise				@ 100 Hz offset				-	-92	-	dBc/Hz						
				@ 1 kHz offset				-	-93	-84							
				@ 10 kHz offset				-	-107	-102							
				@ 100 kHz offset				-	-133	-127							
				@ 1 MHz offset				-	-153	-147							
Reference Spurious Suppression				Ref. Freq. 25 MHz				-	-110	-87	dBc						
Comparison Spurious Suppression				Step Size 500 kHz				-	-98	-80							
Non - Harmonic Spurious Suppression				-				-	-90	-							
Harmonic Suppression				-				-	-32	-15							
VCO Supply Voltage				5.00				4.75	5.00	5.25	V						
PLL Supply Voltage				5.00				4.75	5.00	5.25							
VCO Supply Current				-				-	42	48	mA						
PLL Supply Current				-				-	15	21							
Reference Input (External)		Frequency		25 (square wave)				-	25	-	MHz						
		Amplitude		1				-	1	-	V _{P-P}						
		Input impedance		-				-	100	-	KΩ						
		Phase Noise @ 1 kHz offset		-				-	-140	-	dBc/Hz						
RF Output port Impedance				-				-	50	-	Ω						
Input Logic Level		Input high voltage		-				2.6	-	-	V						
		Input low voltage		-				-	-	0.5	V						
Digital Lock Detect		Locked		-				2.4	-	3.2	V						
		Unlocked		-				-	-	0.4	V						
Frequency Synthesizer PLL				-				ADF4113									
PLL Programming				-				3-wire serial 3V CMOS									
Register Map ^{NOTE 1}	F_Register ^{NOTE 2}	Prescaler Value		Power-Down 2	Current Setting 2		Current Setting 1	Timer Counter Control	Fastlock Mode	Fastlock Enable	CP Three-State	PD Polarity	Muxout Control	Power-Down 1	Counter Reset	Control Bits	
		00		0	111		111	0000	0	0	0	1	001	0	0	10	
	N_Register @ 554 MHz	Reserved		CP Gain	13-Bit B Counter								6-Bit A Counter				Control Bits
		00		1	0000010001010								000100				01
	R_Register	Reserved	DLY	SYNC	Lock Detect Precision	Test Mode Bits	Anti-Backlash Width	14-BIT Reference Counter, R								Control Bits	
	0	0	0	1	00	00	00000000110010								00		

Note 1: Registers Load Sequence: Initialization Register, F Register, R Register, N Register.

Note 2: For the Initialization Register use Register F with Control Bits 11.

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage ^{NOTE 3}	6.3V
PLL Supply Voltage ^{NOTE 3}	6.3V
VCO Supply Voltage to PLL Supply Voltage ^{NOTE 3}	-0.3V to +5.5V
Reference Frequency Voltage	-0.3Vmin, +3.1Vmax
Data, Clock, LE Levels	-0.3Vmin, +3.1Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Note 3: Power on/off Sequence: Power on: VCO Supply Voltage, followed by PLL Supply Voltage. Power off: PLL Supply Voltage, followed by VCO Supply Voltage.

Permanent damage may occur if any of these limits are exceeded



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C
480	7.97	7.81	7.65	41.98	42.77	43.06	14.02	15.27	16.11
489	7.91	7.75	7.61	41.94	42.77	43.11	14.04	15.30	16.13
499	7.83	7.68	7.55	41.79	42.66	43.04	14.06	15.32	16.16
508	7.73	7.61	7.44	41.57	42.47	42.91	14.06	15.32	16.16
518	7.59	7.49	7.28	41.31	42.24	42.72	14.08	15.34	16.19
527	7.37	7.30	7.04	41.06	42.01	42.53	14.09	15.36	16.21
537	7.13	7.06	6.78	40.81	41.78	42.34	14.10	15.35	16.20
546	6.85	6.77	6.55	40.60	41.57	42.29	14.11	15.38	16.23
554	6.60	6.48	6.27	40.44	41.42	42.18	14.12	15.39	16.24

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C
480	-20.52	-23.09	-27.31	-26.90	-28.41	-30.60
489	-23.39	-26.76	-32.62	-29.10	-30.65	-32.86
499	-26.90	-31.32	-38.14	-31.44	-33.23	-35.52
508	-27.19	-31.47	-39.14	-33.91	-35.71	-37.80
518	-29.18	-33.46	-41.76	-35.55	-37.30	-39.06
527	-34.02	-38.72	-43.61	-38.06	-39.57	-40.98
537	-37.01	-40.88	-41.99	-40.07	-41.22	-42.22
546	-34.89	-37.84	-40.04	-40.25	-41.08	-41.73
554	-33.99	-35.91	-37.48	-40.07	-40.64	-40.92

NON-CATALOG

Frequency Synthesizer

KSN-550A-119+

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
480	-96.57	-95.72	-107.35	-133.37	-153.42
489	-94.05	-94.73	-108.14	-134.86	-155.10
499	-96.25	-93.97	-107.49	-135.25	-155.77
508	-94.08	-94.25	-107.71	-135.41	-155.21
518	-94.82	-94.99	-107.77	-134.58	-155.14
527	-94.39	-94.16	-107.89	-133.64	-153.97
537	-94.31	-92.42	-107.16	-132.49	-152.76
546	-92.17	-90.36	-107.03	-131.19	-150.76
554	-92.19	-87.28	-106.46	-130.25	-150.59

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	-5°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
480	-93.73	-93.55	-106.27	-132.81	-153.30
489	-94.63	-93.69	-106.59	-134.77	-155.15
499	-95.15	-93.35	-107.30	-135.43	-155.95
508	-93.35	-93.06	-107.17	-135.63	-156.10
518	-93.07	-93.21	-106.34	-135.08	-155.50
527	-91.37	-90.85	-106.86	-133.86	-154.40
537	-92.74	-89.96	-107.28	-132.71	-152.58
546	-88.97	-88.16	-106.20	-131.59	-151.18
554	-91.44	-87.67	-106.36	-130.53	-150.90

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+55°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
480	-90.85	-93.68	-106.54	-133.18	-153.54
489	-92.08	-91.70	-106.56	-134.41	-153.80
499	-91.08	-92.84	-106.46	-134.85	-155.44
508	-93.60	-94.06	-106.26	-134.97	-155.29
518	-94.18	-91.47	-106.90	-134.12	-154.12
527	-92.30	-91.24	-106.21	-133.08	-153.53
537	-87.69	-89.06	-106.14	-132.04	-152.48
546	-91.61	-88.02	-106.32	-131.17	-151.60
554	-91.37	-87.75	-105.14	-130.24	-150.69



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 480MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 517MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 554MHz+(n*Fcomparison) (dBc) note 1		
	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C
-5	-123.56	-117.82	-112.84	-109.42	-113.69	-108.39	-120.19	-113.49	-108.76
-4	-107.51	-107.61	-108.36	-119.63	-122.06	-105.67	-114.05	-112.03	-108.26
-3	-117.14	-122.09	-121.35	-106.68	-106.94	-106.17	-114.43	-111.84	-107.33
-2	-103.79	-106.65	-103.49	-104.62	-109.96	-100.69	-107.28	-106.91	-100.83
-1	-92.02	-93.96	-94.21	-99.00	-101.36	-95.47	-101.98	-103.35	-100.07
0 note 2	-	-	-	-	-	-	-	-	-
+1	-91.23	-93.46	-93.46	-98.82	-103.14	-95.86	-105.57	-102.10	-98.37
+2	-102.50	-103.56	-102.23	-105.04	-111.04	-100.04	-107.50	-106.79	-100.43
+3	-111.08	-117.16	-112.86	-107.22	-107.04	-105.82	-117.48	-115.23	-105.95
+4	-105.40	-105.23	-108.58	-115.46	-117.16	-109.50	-117.73	-112.31	-107.22
+5	-111.02	-108.73	-108.79	-114.10	-125.48	-106.89	-119.15	-111.90	-108.14

Note 1: Comparison frequency 500 kHz




Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 480MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 517MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 554MHz+(n*Freference) (dBc) note 3		
	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C	-5°C	+25°C	+55°C
-5	-105.64	-106.03	-107.72	-105.12	-105.95	-108.53	-104.99	-105.57	-108.89
-4	-104.53	-104.90	-104.00	-105.47	-105.94	-106.41	-105.32	-105.75	-106.69
-3	-110.02	-108.48	-110.75	-107.94	-110.44	-113.32	-111.30	-112.43	-115.93
-2	-108.38	-106.44	-106.96	-107.72	-105.67	-108.59	-107.79	-106.79	-111.48
-1	-110.38	-110.48	-111.21	-109.88	-109.98	-111.28	-113.29	-112.04	-112.51
0 note 4	-	-	-	-	-	-	-	-	-
+1	-109.27	-110.19	-111.71	-110.38	-110.85	-109.95	-112.07	-110.12	-110.68
+2	-115.23	-111.52	-111.61	-114.10	-107.26	-108.77	-107.63	-107.82	-111.45
+3	-112.23	-116.13	-125.15	-117.49	-127.81	-124.00	-127.94	-119.76	-118.31
+4	-113.53	-114.54	-114.39	-112.61	-111.94	-115.98	-125.55	-116.56	-118.19
+5	-107.08	-110.23	-114.42	-110.75	-112.91	-113.79	-115.05	-116.76	-116.07


Note 3: Reference frequency 25 MHz

Note 4: All spurs are referenced to carrier signal (n=0).


Typical Performance Curves

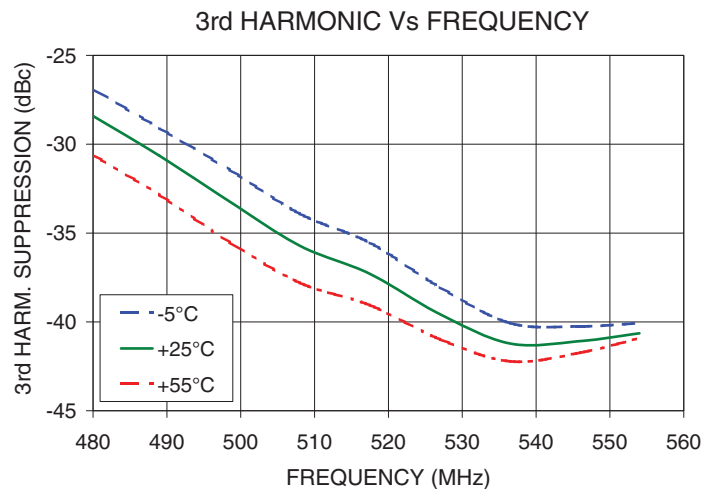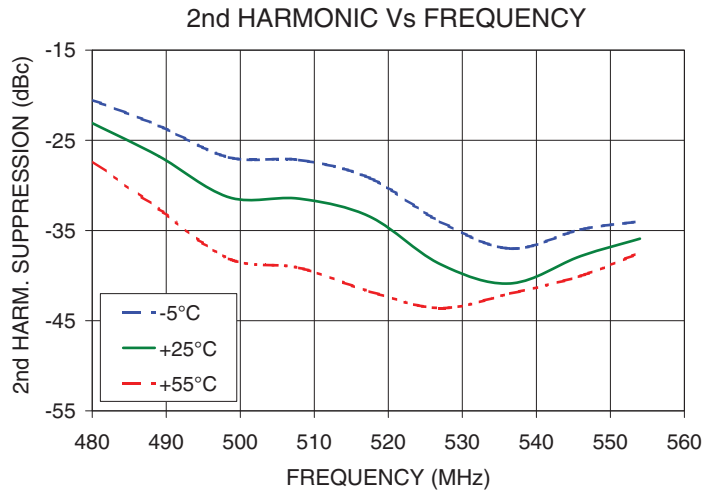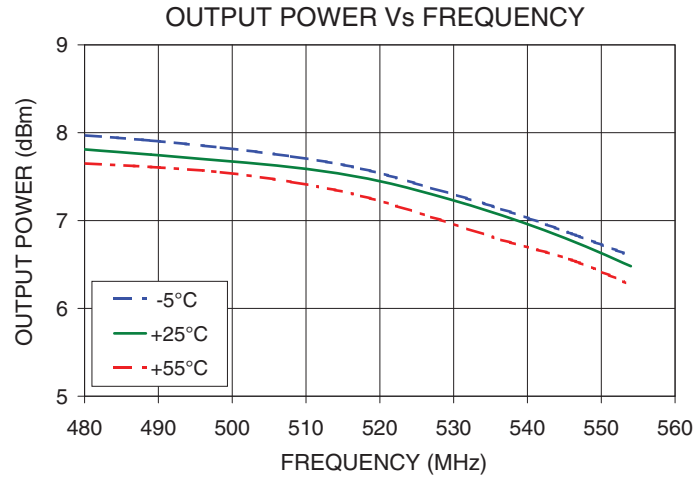


PHASE NOISE @ 100Hz offset

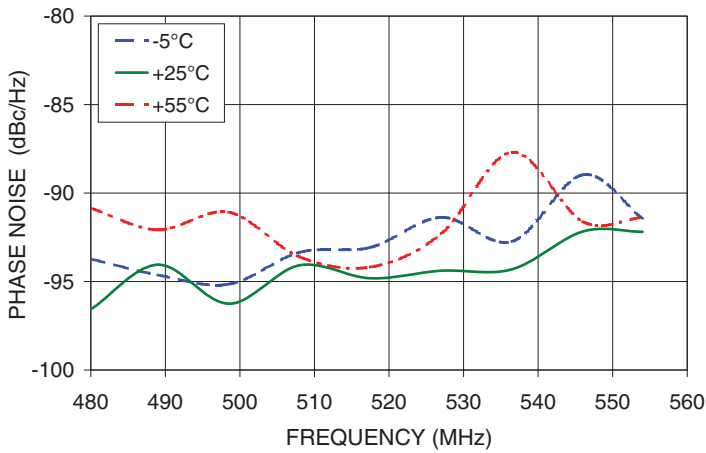


PHASE NOISE @ 1kHz offset

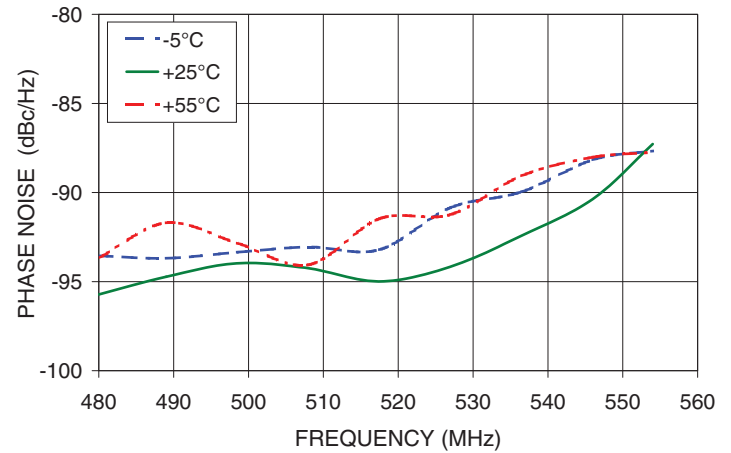


PHASE NOISE @ 10kHz offset






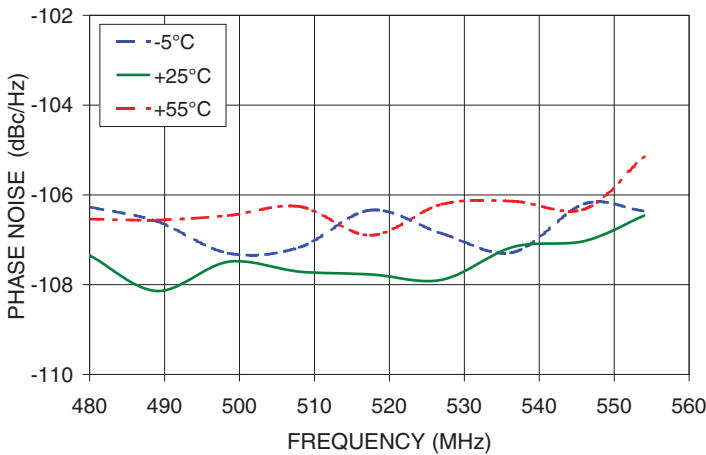


PHASE NOISE @ 100kHz offset

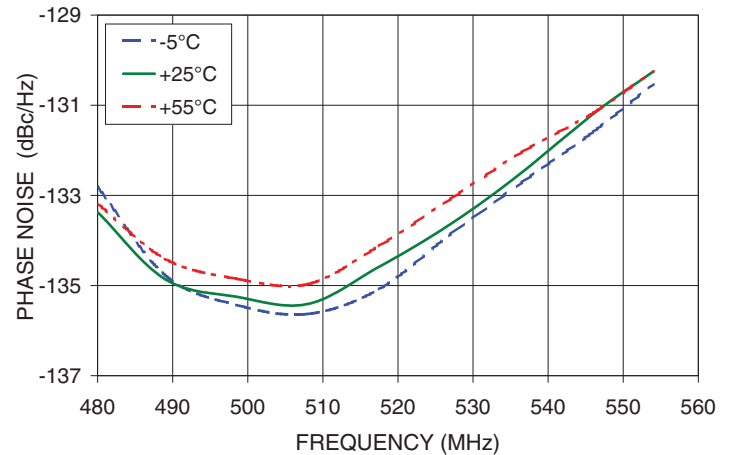


PHASE NOISE @ 1MHz offset

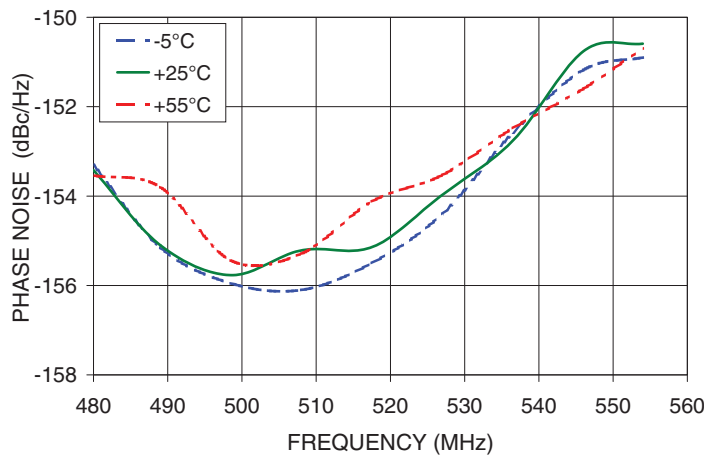

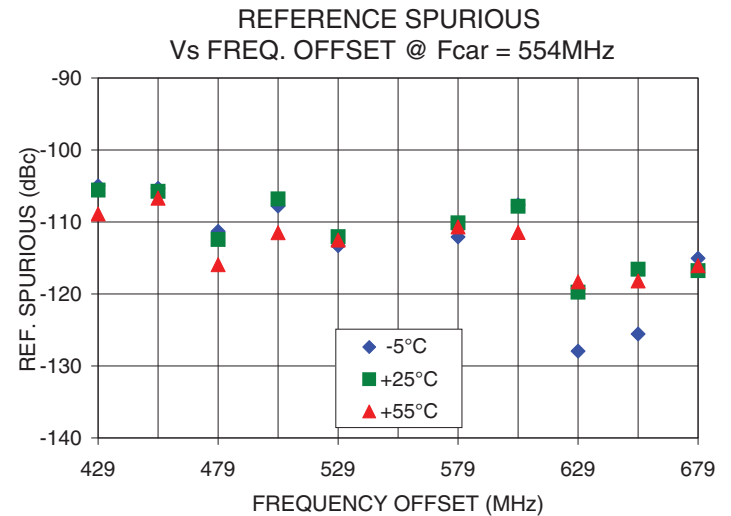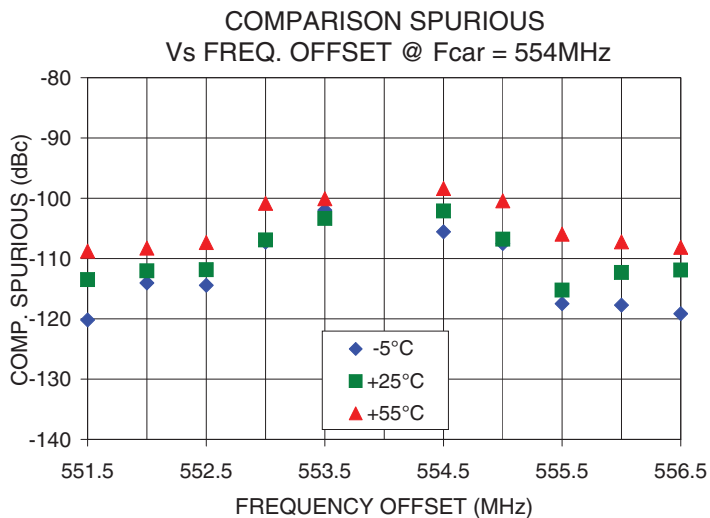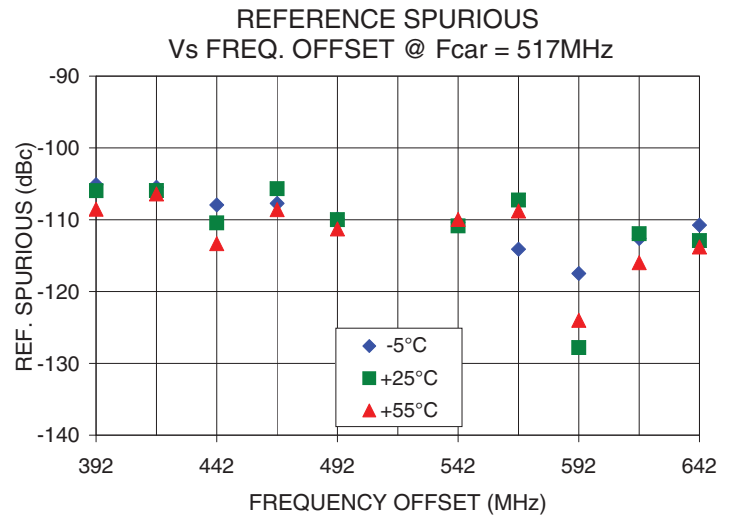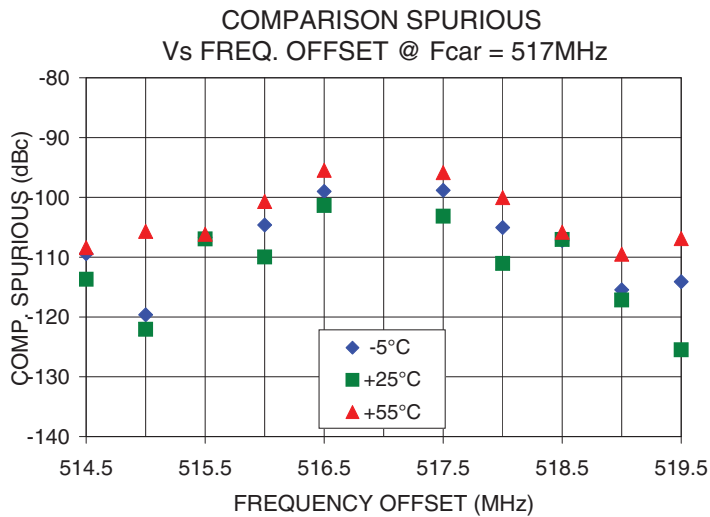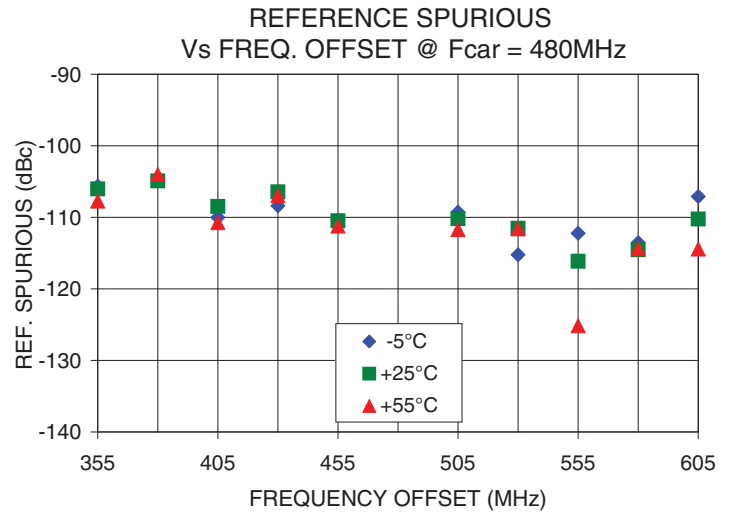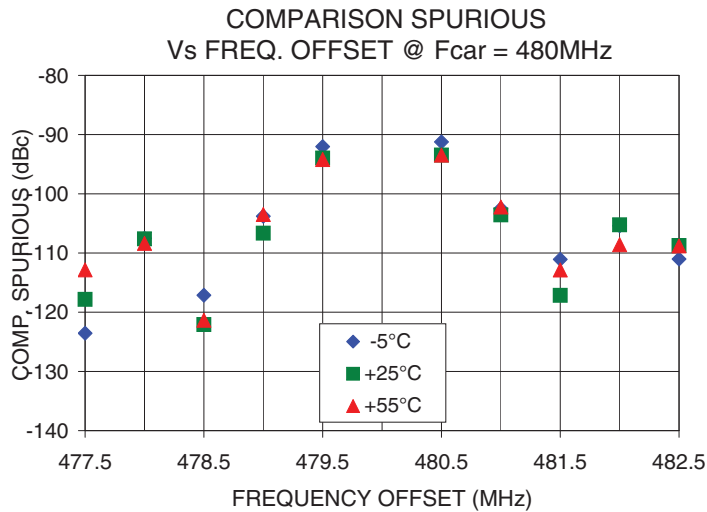

Pin Configuration

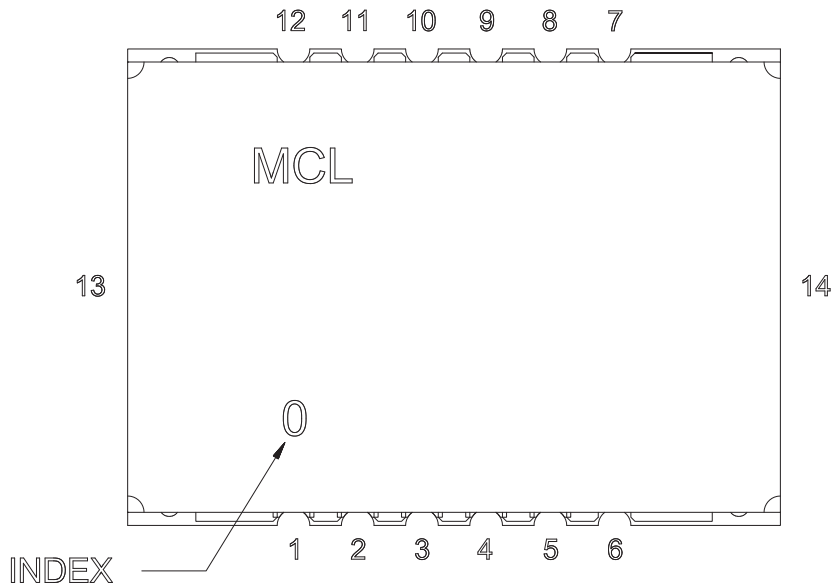


Pin Connection


Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

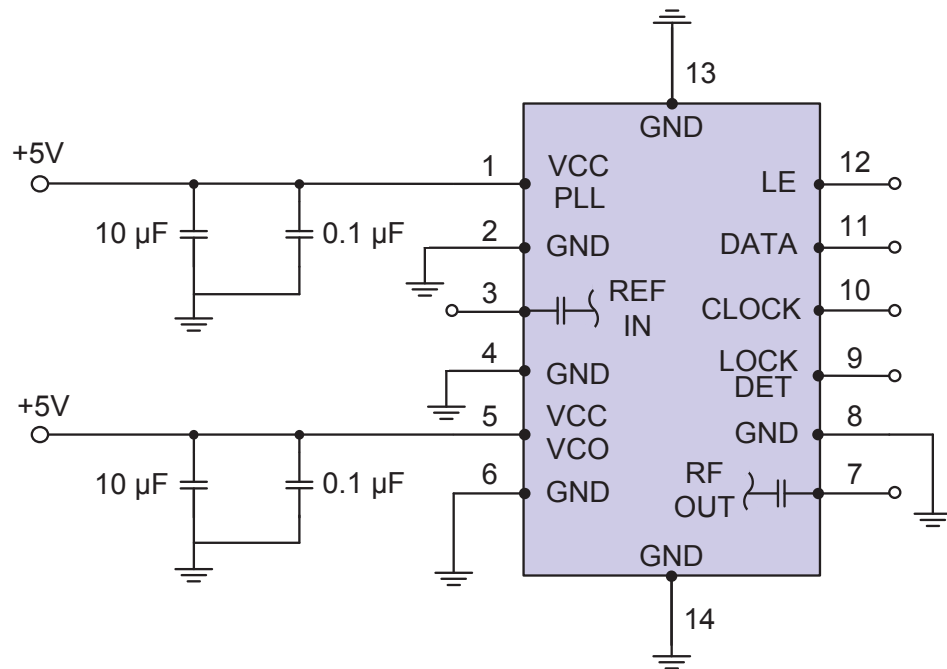

Device Marking

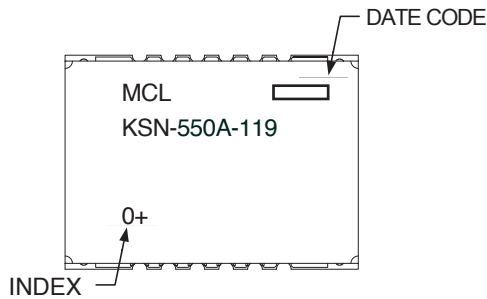

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK1042

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2