

NON-CATALOG

Frequency Synthesizer

KSN-976A-119+

50Ω 945 to 976 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.15"



CASE STYLE: DK801

Product Overview

The KSN-976A-119+ is a Frequency Synthesizer, designed to operate from 945 to 976 MHz for base station applications. The KSN-976A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -116 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -86 dBc typ.• Reference Spurious: -114 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-976A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.80" x 0.58" x 0.15"	The small size enables the KSN-976A-119+ to be used in compact designs.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 945 to 976 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+5V)
- Small size 0.80" x 0.58" x 0.15"

Applications

- Base station

General Description

The KSN-976A-119+ is a Frequency Synthesizer, designed to operate from 945 to 976 MHz for base station applications. The KSN-976A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.15") to shield against unwanted signals and noise. To enhance the robustness of KSN-976A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.




CASE STYLE: DK801

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic

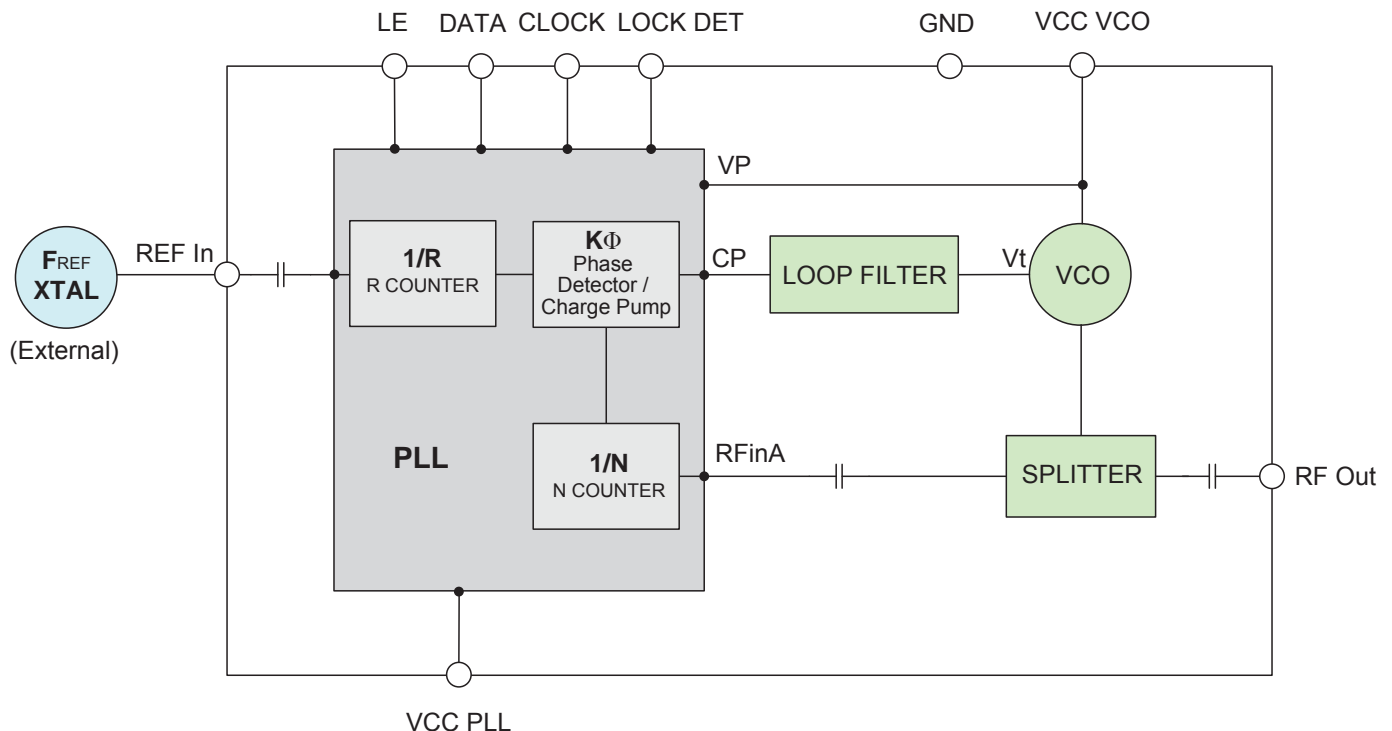

Electrical Specifications *(over operating temperature -40°C to +85°C)*

Parameters	Test Conditions	Min.	Typ.	Max.	Units									
Frequency Range	-	945	-	976	MHz									
Step Size	-	-	20	-	kHz									
Settling Time	Within ± 1 kHz	-	20	-	mSec									
Output Power	-	-2.5	+0.7	+2.5	dBm									
SSB Phase Noise	@ 100 Hz offset	-	-73	-	dBc/Hz									
	@ 1 kHz offset	-	-84	-79										
	@ 10 kHz offset	-	-116	-111										
	@ 100 kHz offset	-	-139	-133										
	@ 1 MHz offset	-	-158	-152										
Integrated SSB Phase Noise	@ 100 Hz to 1MHz	-	-44	-38	dBc									
Reference Spurious Suppression	Ref. Freq. 15 MHz	-	-114	-75	dBc									
Comparison Spurious Suppression	Step Size 20 kHz	-	-86	-60										
Non - Harmonic Spurious Suppression	-	-	-90	-										
Harmonic Suppression	-	-	-30	-23										
VCO Supply Voltage	5.00	4.75	5.00	5.25	V									
PLL Supply Voltage	5.00	4.75	5.00	5.25	V									
VCO Supply Current	-	-	34	40	mA									
PLL Supply Current	-	-	11	18										
Reference Input (External)	Frequency	15 (sine wave)	-	15	-	MHz								
	Amplitude	1	-	1	-	V _{P-P}								
	Input impedance	-	-	100	-	KΩ								
	Phase Noise @ 1 kHz offset	-	-	-135	-	dBc/Hz								
RF Output port Impedance	-	-	50	-	Ω									
Input Logic Level	Input high voltage	-	4.20	-	-	V								
	Input low voltage	-	-	0.95	-	V								
Digital Lock Detect	Locked	-	4.35	-	5.25	V								
	Unlocked	-	-	0.40	-	V								
Frequency Synthesizer PLL	-	ADF4113												
PLL Programming	-	3-wire serial 5V CMOS												
Register Map ^{NOTE 1}	F_Register ^{NOTE 2}	<i>Prescaler Value</i>	<i>Power-Down 2</i>	<i>Current Setting 2</i>	<i>Current Setting 1</i>	<i>Timer Counter Control</i>	<i>Fastlock Mode</i>	<i>Fastlock Enable</i>	<i>CP Three-State</i>	<i>PD Polarity</i>	<i>Muxout Control</i>	<i>Power-Down 1</i>	<i>Counter Reset</i>	<i>Control Bits</i>
		01	0	111	111	0000	0	0	0	1	001	0	0	10
	N_Register @ 976 MHz	<i>Reserved</i>	<i>CP Gain</i>	<i>13-Bit B Counter</i>							<i>6-Bit A Counter</i>			<i>Control Bits</i>
	00	1	0101111101010							000000			01	
R_Register	<i>Reserved</i>	<i>DLY</i>	<i>SYNC</i>	<i>Lock Detect Precision</i>	<i>Test Mode Bits</i>	<i>Anti-Backlash Width</i>	<i>14-BIT Reference Counter, R</i>					<i>Control Bits</i>		
	0	0	0	1	00	00	00001011101110					00		

Note 1: Registers Load Sequence: Initialization Register, F Register, R Register, N Register.

Note 2: For the Initialization Register use Register F with Control Bits 11.

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage ^{NOTE 3}	6V
PLL Supply Voltage ^{NOTE 3}	6V
VCO Supply Voltage to PLL Supply Voltage ^{NOTE 3}	-0.3V to +5.5V
Reference Frequency Voltage	-0.3Vmin, VCC PLL +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Note 3: Power on/off Sequence: Power on: VCO Supply Voltage, followed by PLL Supply Voltage. Power off: PLL Supply Voltage, followed by VCO Supply Voltage.

Permanent damage may occur if any of these limits are exceeded



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

NON-CATALOG

Frequency Synthesizer

KSN-976A-119+

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	945	0.61	0.79	0.82	32.42	33.90	34.85	8.81	10.96
948	0.59	0.77	0.80	32.41	33.90	34.86	8.81	10.96	12.74
954	0.55	0.73	0.76	32.40	33.90	34.86	8.82	10.97	12.75
960	0.52	0.69	0.72	32.38	33.89	34.85	8.82	10.97	12.75
966	0.50	0.67	0.69	32.36	33.88	34.84	8.83	10.98	12.76
972	0.50	0.65	0.68	32.34	33.86	34.84	8.84	11.00	12.77
976	0.50	0.65	0.67	32.34	33.85	34.83	8.84	10.99	12.77

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
945	-28.88	-29.72	-30.73	-53.53	-54.08	-54.09
948	-28.92	-29.80	-30.77	-53.98	-54.19	-54.00
954	-28.78	-29.65	-30.63	-54.43	-54.20	-53.53
960	-29.11	-29.86	-30.81	-55.17	-53.95	-53.18
966	-30.06	-30.80	-31.72	-54.77	-53.82	-52.83
972	-31.05	-31.76	-32.70	-53.37	-52.47	-51.64
976	-31.59	-32.35	-33.26	-52.76	-51.69	-50.86

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
945	-76.52	-83.86	-116.81	-139.02	-156.66
948	-75.67	-84.11	-116.62	-139.04	-158.00
954	-73.55	-83.86	-116.55	-138.83	-158.42
960	-72.19	-84.71	-116.86	-138.89	-158.92
966	-69.33	-84.37	-116.38	-138.78	-158.40
972	-68.73	-84.19	-116.47	-138.85	-158.42
976	-68.00	-86.23	-116.57	-138.71	-158.09

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
945	-77.85	-82.18	-116.84	-139.88	-156.11
948	-74.35	-84.36	-116.74	-140.17	-157.05
954	-76.27	-84.35	-116.53	-140.07	-155.75
960	-74.82	-83.77	-116.26	-140.27	-157.17
966	-75.77	-84.38	-116.00	-139.98	-155.01
972	-73.87	-82.48	-116.09	-139.46	-155.76
976	-70.97	-86.12	-115.89	-139.23	-157.96

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
945	-74.34	-83.48	-115.32	-137.04	-155.21
948	-76.03	-84.55	-115.15	-137.17	-155.30
954	-75.97	-83.98	-115.13	-137.26	-155.29
960	-74.38	-85.37	-115.23	-137.23	-156.35
966	-73.36	-85.14	-115.23	-137.42	-156.63
972	-74.67	-85.65	-115.10	-137.17	-155.93
976	-72.17	-83.85	-115.00	-137.19	-155.85



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

NON-CATALOG

Frequency Synthesizer

KSN-976A-119+

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 945MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 960MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 976MHz+(n*Fcomparison) (dBc) note 1		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-104.10	-108.96	-99.49	-100.18	-105.12	-101.68	-96.29	-100.31	-101.58
-4	-107.52	-107.93	-97.45	-100.28	-102.41	-98.72	-94.68	-97.64	-99.25
-3	-104.23	-103.25	-95.50	-112.24	-111.92	-98.82	-105.17	-101.28	-99.35
-2	-96.12	-97.38	-92.00	-95.95	-98.50	-91.06	-94.00	-95.36	-90.31
-1	-86.77	-88.42	-84.74	-85.31	-86.72	-80.33	-80.57	-82.66	-77.56
0 note 2	-	-	-	-	-	-	-	-	-
+1	-86.47	-88.65	-85.96	-84.98	-85.68	-81.42	-80.94	-82.39	-77.61
+2	-95.32	-97.86	-92.22	-96.71	-98.58	-91.02	-95.41	-95.07	-90.39
+3	-102.72	-103.59	-97.54	-108.26	-111.88	-100.24	-105.82	-100.77	-100.67
+4	-112.07	-108.89	-97.89	-104.57	-103.08	-99.32	-97.25	-98.14	-99.75
+5	-106.44	-107.50	-99.83	-102.44	-106.70	-103.90	-97.43	-101.38	-104.50

Note 1: Comparison frequency 20 kHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 945MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 960MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 976MHz+(n*Freference) (dBc) note 3		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-114.40	-121.08	-123.27	-107.02	-110.08	-117.50	-118.04	-121.19	-120.18
-4	-107.69	-106.84	-107.70	-103.51	-100.58	-96.73	-107.31	-108.57	-108.15
-3	-116.22	-127.59	-123.70	-111.83	-111.12	-110.94	-123.05	-125.71	-126.49
-2	-108.76	-109.32	-109.07	-109.52	-117.19	-113.64	-112.69	-114.04	-114.14
-1	-121.24	-126.09	-128.24	-118.57	-114.51	-112.60	-123.88	-122.72	-126.21
0 note 4	-	-	-	-	-	-	-	-	-
+1	-116.05	-115.27	-115.56	-114.17	-107.54	-106.35	-116.77	-120.75	-121.46
+2	-106.29	-110.17	-108.90	-116.24	-117.42	-110.18	-106.89	-108.92	-109.64
+3	-109.52	-113.27	-113.40	-104.35	-107.92	-108.96	-118.03	-120.60	-117.61
+4	-100.57	-103.68	-104.39	-91.51	-92.44	-92.85	-103.66	-104.79	-104.88
+5	-110.40	-110.71	-111.37	-119.46	-109.56	-108.65	-116.87	-117.92	-117.06

Note 3: Reference frequency 15 MHz

Note 4: All spurs are referenced to carrier signal (n=0).






For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


Typical Performance Curves

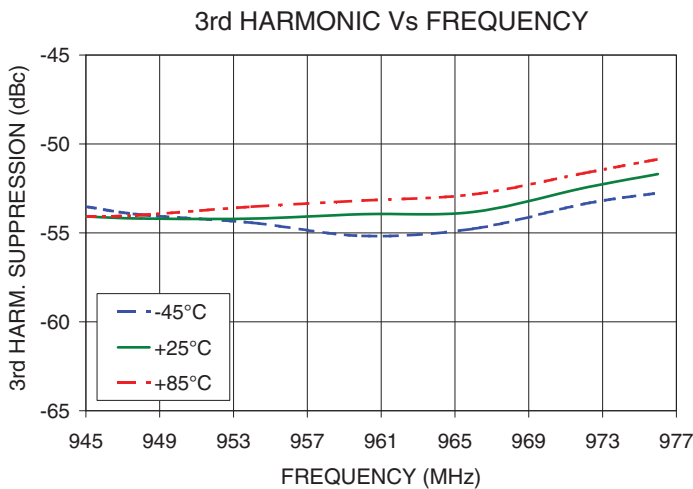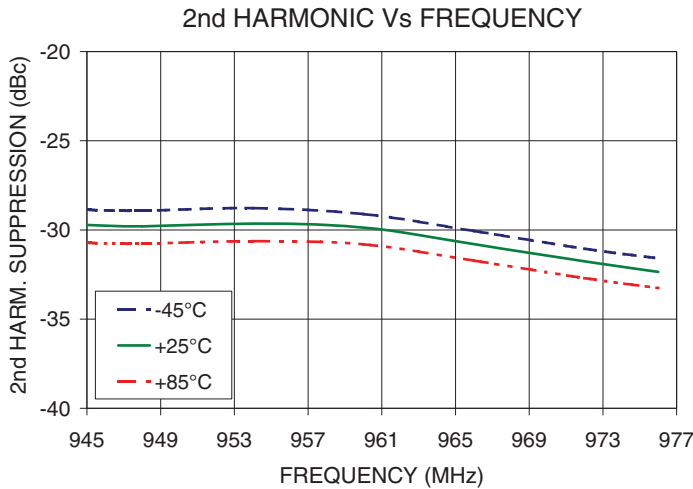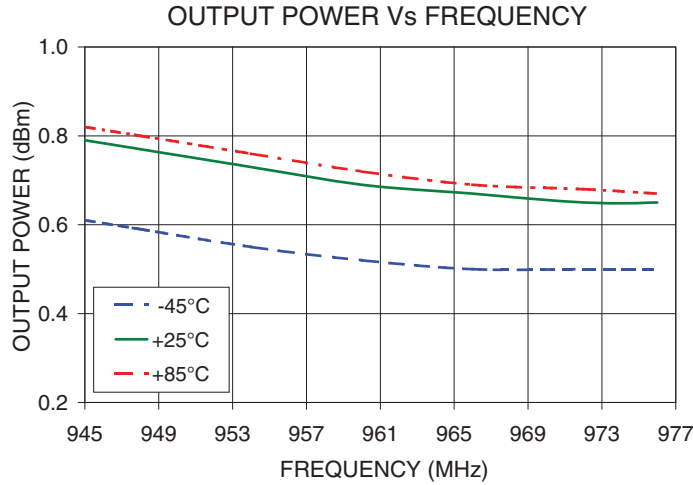


PHASE NOISE @ 100 Hz offset

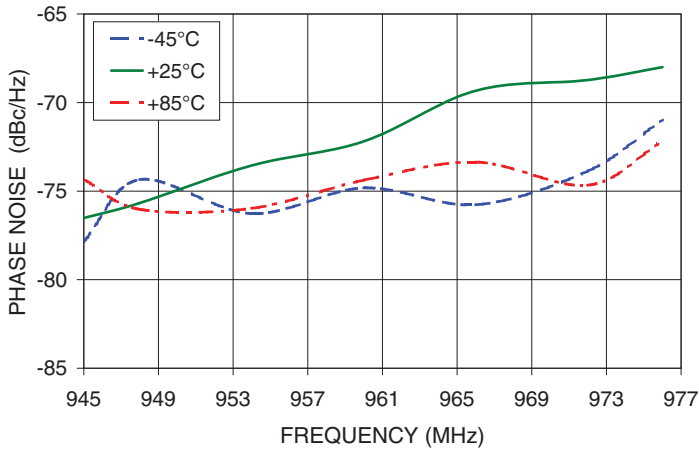


PHASE NOISE @ 1 kHz offset

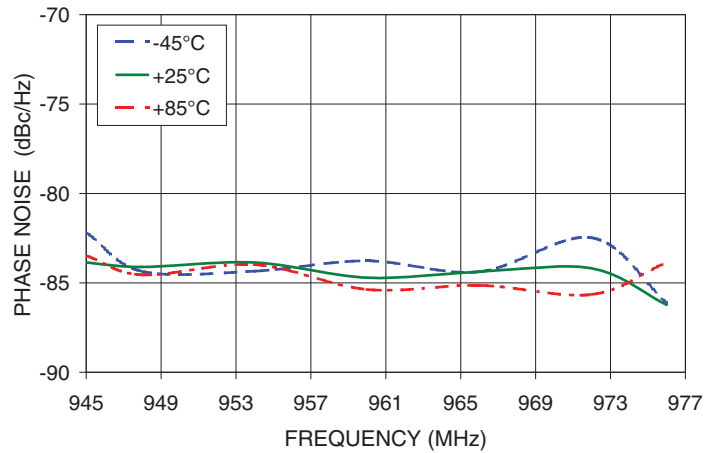


PHASE NOISE @ 10 kHz offset

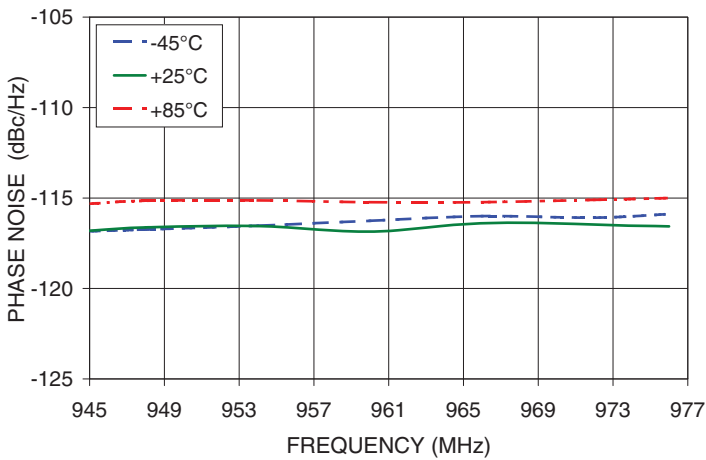

PHASE NOISE @ 100 kHz offset

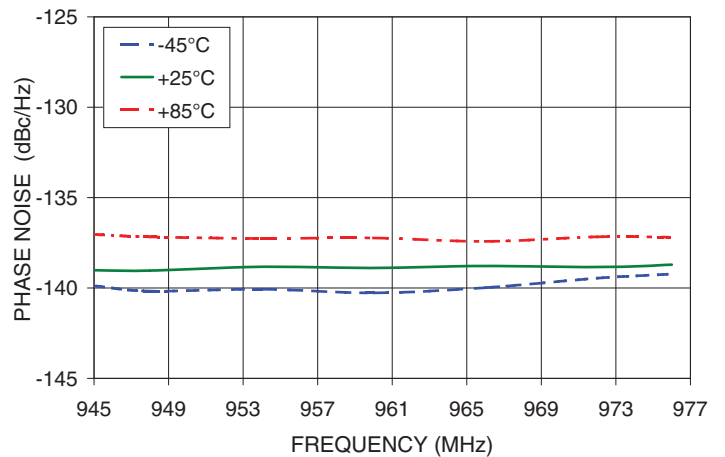







PHASE NOISE @ 1 MHz offset

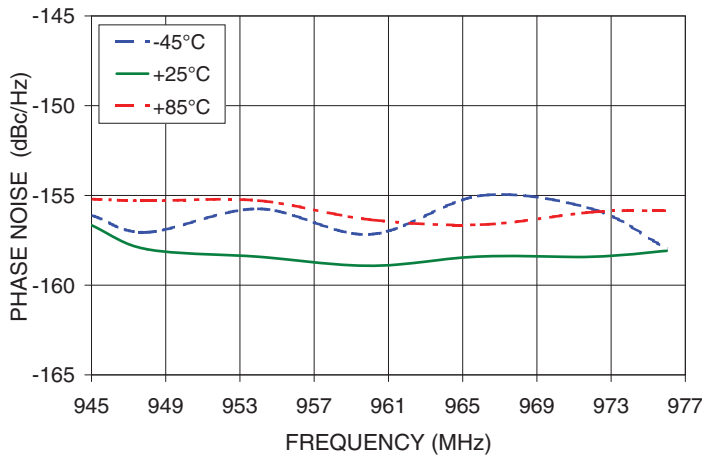

NON-CATALOG

Frequency Synthesizer

KSN-976A-119+

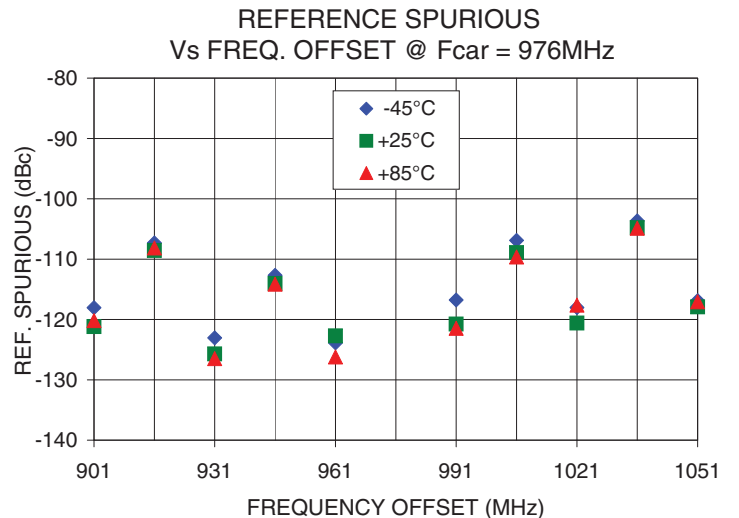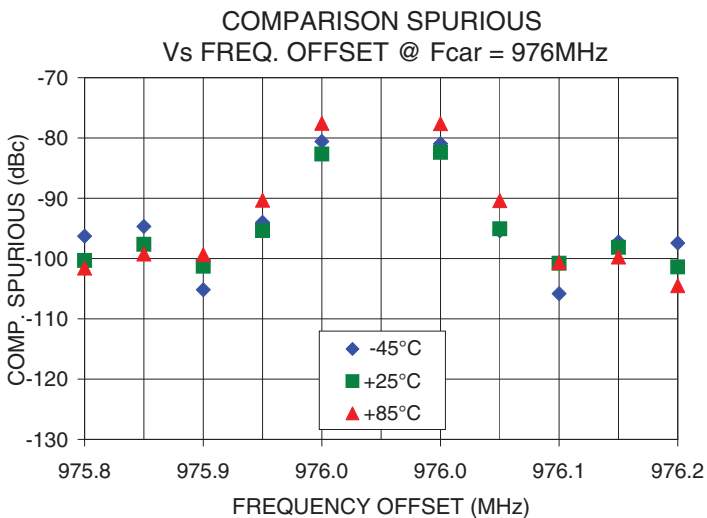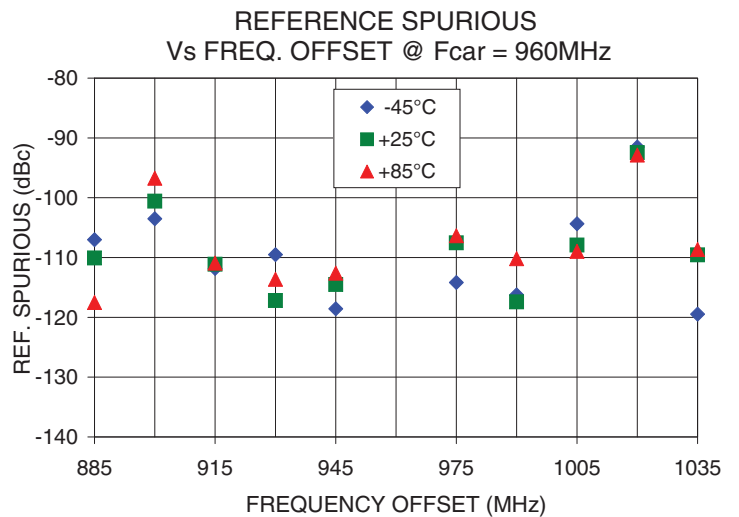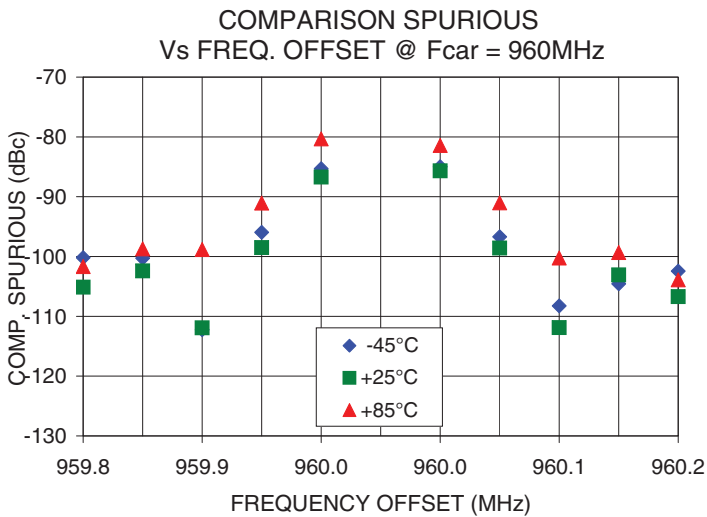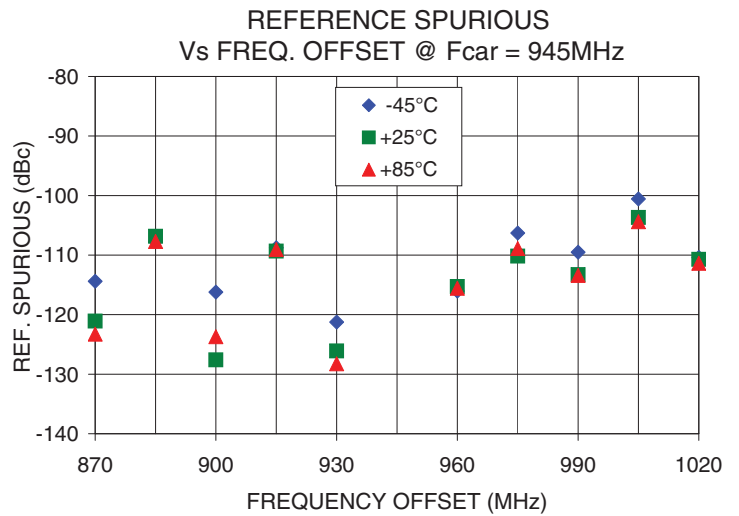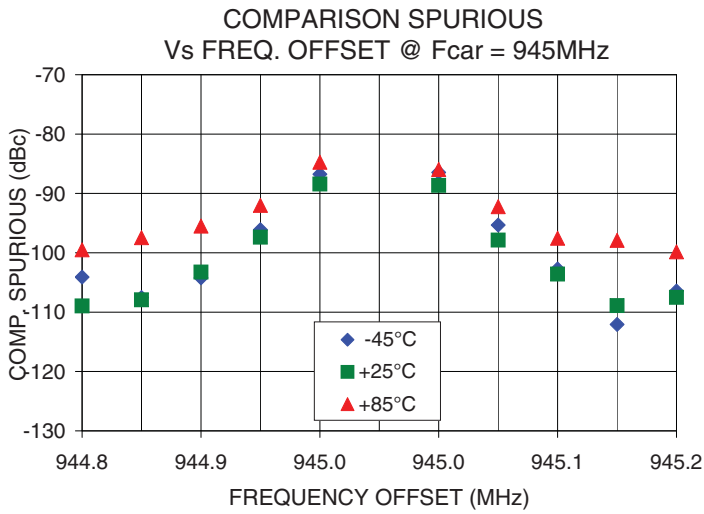


For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

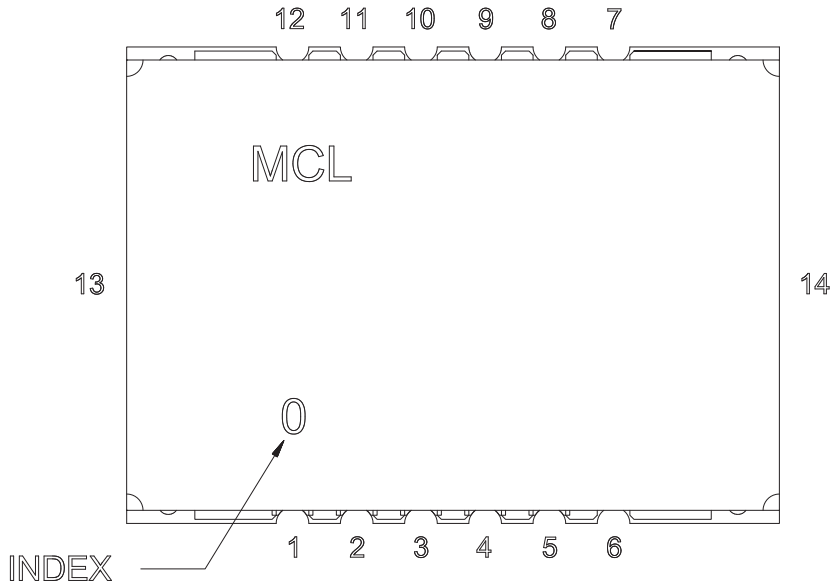


Pin Connection


Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

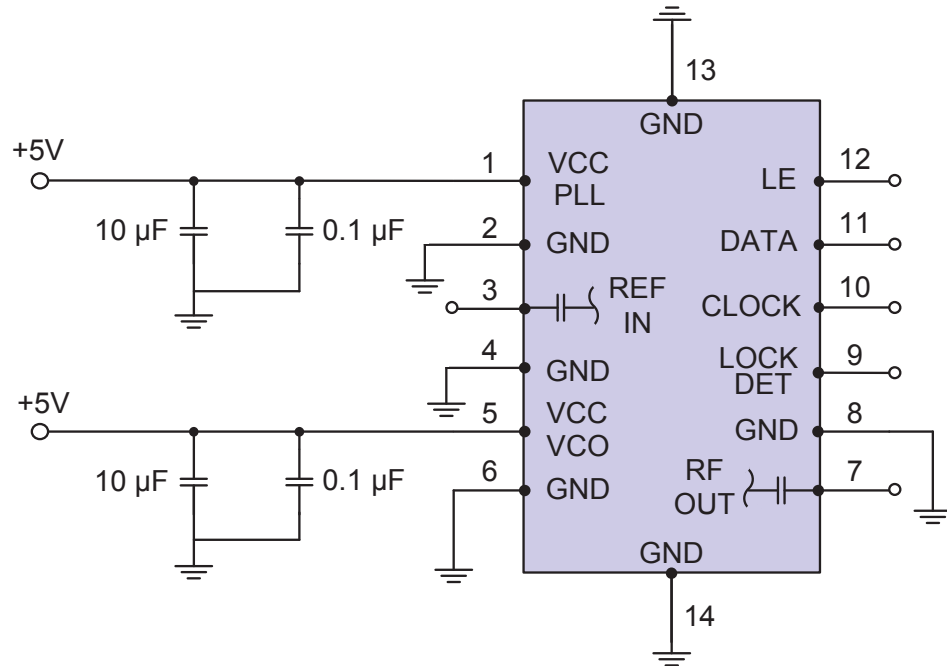

Device Marking

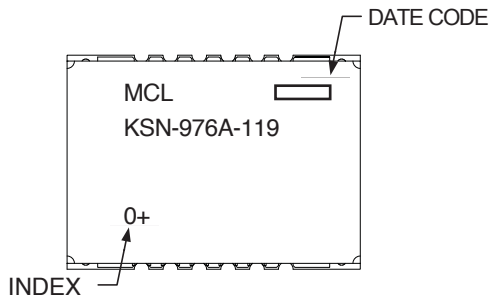

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK801

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567+

Environment Ratings: ENV03T2