

Non-Catalog Model

Frequency Mixer

LRMS-3+

Level 7 (LO Power + 7 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request. Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ130


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (f _L to f _u)	.04		400	MHz
	RF (f _L to f _u)	.04		400	MHz
	IF	DC		400	MHz
Conversion Loss	mid band		4.95	7	dB
	Total Range		5.35	8	dB
LO-RF Isolation	Low Range	50	60		dB
	Mid Range	35	54		dB
	Upper Range	25	41		dB
LO-IF Isolation	Low Range	40	48		dB
	Mid Range	30	40		dB
	Upper Range	15	26		dB

Note: Low Range = [f_L to 10f_L] Mid Range = [10f_L to f_u/2] Upper Range = [f_u/2 to f_u]
 mid band = [2f_L to f_u/2]

MAXIMUM RATINGS	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2,3,6

Electrical Schematics

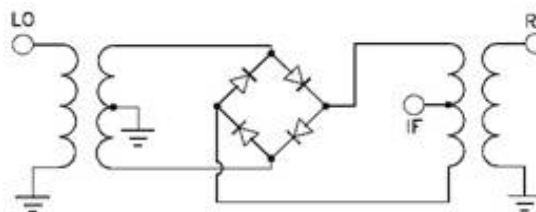

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. X1
 LRMS-3+
 2/14/2007
 Page 1 of 1