

Type-N/BNC Adaptenuator

50Ω 0.5W 10dB DC to 2000 MHz

NF-BM-10



CASE STYLE: DJ867

Connectors	Model
Conn1 N-Female	Conn2 BNC-Male
Model NF-BM-10	

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 150°C
Permanent damage may occur if any of these limits are exceeded.	


Features

- improved interface matching
- wideband, DC to 2000 MHz, useable to 4000 MHz
- excellent VSWR, 1.1:1 typ.
- excellent flatness, ± 0.1 dB typ.
- rugged unibody construction

Applications

- instrumentation
- provides attenuation and connector type change
- minimizes hardware

Outline Drawing

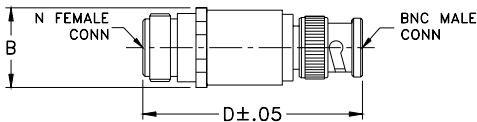

Outline Dimensions (inch/mm)

B	D	wt
.73	2.00	grams
18.54	50.80	48.2

Electrical Specifications




FREQ. (MHz)	ATTENUATION (dB)						VSWR (:1)						MAX. INPUT POWER (W)	
	Flatness*						DC-500 MHz		DC-1000 MHz		DC-2000 MHz			
	Nom.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.		Max.
DC-2000	10±0.3	0.05	0.15	0.10	0.25	0.15	0.30	1.1	1.2	1.1	1.3	1.2	1.25	0.5

*Flatness defined as peak to peak attenuation over band divided by 2.

Typical Performance Data

FREQUENCY (MHz)	ATTENUATION (dB)	VSWR (:1)	
		BNC-Male	N-Female
1.00	10.01	1.00	1.00
5.00	10.03	1.00	1.00
10.00	10.03	1.00	1.00
30.00	10.02	1.00	1.00
100.00	10.02	1.00	1.01
500.00	10.06	1.01	1.02
1000.00	10.09	1.03	1.03
1500.00	10.05	1.05	1.06
1700.00	10.08	1.07	1.06
2000.00	10.08	1.09	1.10

Electrical Schematic

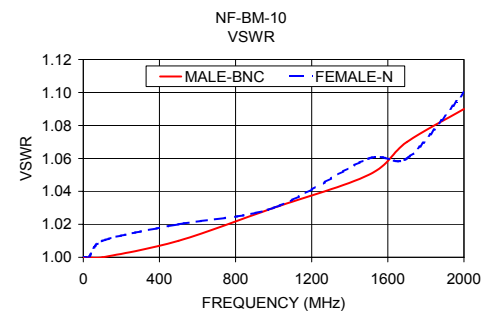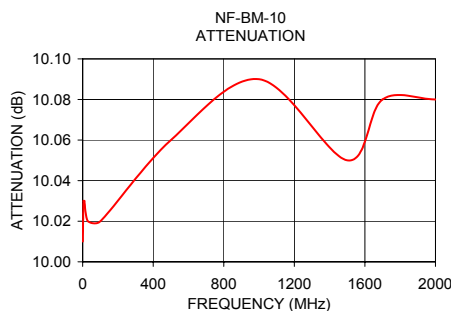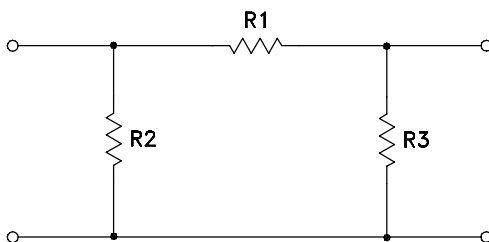

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

