

## Monolithic Amplifier PHA-13HLN+

Mini-Circuits

### 50Ω 1 MHz to 1 GHz

## THE BIG DEAL

- Ultra-High IP3, +43 dBm typ.
- Medium Power, +28.7dBm typ.
- Excellent Noise Figure, 1.1 dB typ.



Generic photo used for illustration purposes only CASE STYLE: DF782

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

## **APPLICATIONS**

- Base station infrastructure
- CATV
- Cellular

## **PRODUCT OVERVIEW**

PHA-13HLN+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-PHEMT\* technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PHA-13HLN+ has good input and output return loss over a broad frequency range. PHA-13HLN+ is enclosed in a SOT-89 package and has very good thermal performance.

### **KEY FEATURES**

Feature	Advantages
Broad Band: 1 MHz to 1 GHz	Broadband covering primary wireless communications bands: VHF, UHF, Cellular
Extremely High IP3 +38.4 dBm typical at 1 MHz +43 dBm typical at 0.5 GHz The PHA-13HLN+ matches industry leading IP3 performance relative to device size and power consum of the design and E-PHEMT Structure provides enhanced linearity over a broad frequency range as evid approximately 15 dB above the P1dB point. This feature makes this amplifier ideal for use in: • Driver amplifiers for complex waveform up converter paths • Drivers in linearized transmit systems • Secondary amplifiers in ultra-High Dynamic range receivers	
Low Noise Figure 1.1 dB at 0.5 GHz	Enables lower system noise figure performance
High P1dB +28.7 dBm at 500 MHz	High P1dB, High OIP3, Low NF results in a very dynamic range preventing amplifier saturation under strong interfering signals. It can also be used to drive mixers requiring high drive

\* Enhancement mode pseudomorphic High Electron Mobility Transistor.



Mini-Circuits

# Monolithic Amplifier PHA-13HLN+

Mini-Circuits

50Ω 1 MHz to 1 GHz

## ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C, 50Ω, UNLESS NOTED OTHERWISE

Parameter	Condition Vd=+8V <sup>1</sup>				Units
	(MHz)	Min.	Тур.	Max.	
Frequency Range		1		1000	MHz
	1	22.4	25.0	27.4	
	20	-	24.3	_	
Gain	250	-	23.0	_	dB
	500	20.4	22.7	25.0	
	1000	_	20.4	_	
	1		10.8		
	20		15.8		
Input Return Loss	250		16.7		dB
	500		17.5		
	1000		10.5		
	1		11.2		
	20		18.8		
Output Return Loss	250		17.7		dB
	500		29.4		
	1000		9.0		
Reverse Isolation	500		26.3		dB
	1		+26.2		
	20		+27.3		
Output Power @1 dB Compression	250		+28.4		dBm
	500		+28.7		
	1000		+27.4		
	1	_	+38.4	_	
	20	_	+41.7	_	
Output IP3 <sup>2</sup>	250	_	+43.5	_	dBm
	500	40.0	+43.0	_	
	1000		+42.2	_	
	1000		3.0		
	20		1.2		
Noise Figure	250		1.2		dB
NOISE FIGURE	500		1.1		
	1000		1.4		
Device Operating Voltage	1000		+8.0		V
Device Operating Voltage			234.1	251	mA
Device Operating Current Device Current Variation vs. Temperature <sup>3</sup>			-100.6	201	μΑ/°C
Device Current Variation vs. Temperature <sup>3</sup> Device Current Variation vs Voltage					-
Device Current Variation vs Voltage Thermal Resistance, junction-to-ground lead Junction-to-			0.0155		mA/mV
ground lead at 85°C stage temperature		T	23.3		°C/W

1. Measured on Mini-Circuits Characterization test board TB-969-13HLN+. See Characterization Test Circuit (Fig. 1)

2. Tested at Pout= 0 dBm / tone.

3. (Current at 85°C – Current at -45°C)/130



# Monolithic Amplifier PHA-13HLN+

Mini-Circuits

50Ω 1 MHz to 1 GHz

## **ABSOLUTE MAXIMUM RATINGS<sup>4</sup>**


Parameter	Ratings
Operating Temperature (ground lead)	-40°C to +95°C
Storage Temperature	-65°C to +150°C
Power Dissipation	3.3 W <sup>5</sup>
Input Power (CW)	+21 dBm (5 minutes max) <sup>6</sup> +10 dBm (continuous) for 1-10 MHz +11 dBm (continuous) for 10-1000 MHz
DC Voltage on Pin 3	+10 V

4. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are

not intended for continuous normal operation. 5. up to 85°C, derate linearly to 2.5 W at 95°C.

6. up to 85°C, derate linearly to 18 dBm at 95°C.

## SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

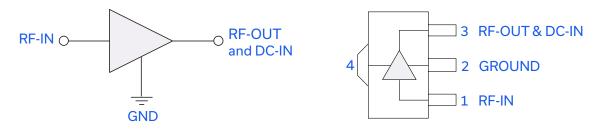


Function	Pin Number	Description
RF-IN	1	RF Input
RF-OUT and DC-IN	3	RF Output and DC Bias
GND	2,4	Connections to ground.

## Monolithic Amplifier PHA-13HLN+ 50Ω

Mini-Circuits

1 MHz to 1 GHz

## **CHARACTERIZATION TEST / RECOMMENDED APPLICATION CIRCUIT**

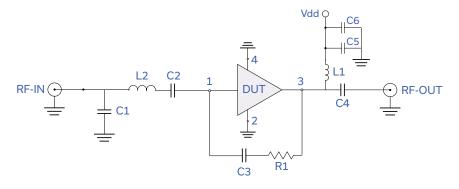

Components	Size	Value	Manufacturer	P/N
C1	0402	1.5 pF		GRM1555C1H1R5CZ01
C2	0603	2.2 uF	Murata	GRM188R61C225KE15
C3	0402	0.1uF		GRM155R71C104KA88
C4	0603	2.2 uF		GRM188R61C225KE15
C5	0402	1000 pF		GRM1555C1H102JA01
C6	0805	10 uF		GRM21BR61C106KE15
L1	1210	15 uH		LQH32DN150K53L
L2	0603	5.1 nH	Coilcraft	0603CS-5N1XJL
R1	0402	1500 Ω	Koa	RK73H1ET1501F

Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-969-13HLN+)


Gain, Return loss, Output power at 1dB compression (P1dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss:  $P_{IN}$ = -25dBm

2. Output IP3 (OIP3): Two tones, spaced 0.5 MHz apart, 0 dBm/ tone at output.

### **PRODUCT MARKING**



Marking may contain other features or characters for internal lot control



## Monolithic Amplifier PHA-13HLN+

50Ω 1 MHz to 1 GHz

## ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. CLICK HERE

	Data Table		
Performance Data	Swept Graphs		
	S-Parameter (S2P Files) Data Set (.zip file)		
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: matte-tin		
Tape & Reel Standard quantities available on reel	F55 7" reels with 20, 50, 100, 200, 500 or 1K devices		
Suggested Layout for PCB Design	PL-523		
Evaluation Board	TB-969-13HLN+		
Environmental Ratings	ENV08T9		

## **ESD RATING**

Human Body Model (HBM): Class 1B (Pass 500 V) in accordance with ANSI/ESD STM 5.1 - 2001

### **MSL RATING**

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

NOTES

- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.