


Plug-In

# NON-CATALOG

# Power Splitter/Combiner

## PSC-2-11+

2 Way-0° 50Ω 5 to 2000 MHz



CASE STYLE: A01

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8
CASE GROUND	2,3,4,7,8

### Outline Drawing

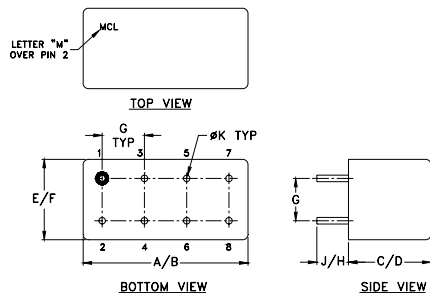

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.770	.800	.385	.400	.370	.400	
19.56	20.32	9.78	10.16	9.40	10.16	
G	H	J	K			wt
.200	.20	.14	.031			grams
5.08	5.08	3.56	0.79			5.2

### Features

- wideband, 5 to 2000 MHz
- low insertion loss, 0.6 dB typ.
- rugged welded construction

### Applications

- VHF/UHF
- GPS
- satellite distribution
- cellular

### Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
5-2000	21	16	22	18	19	9	0.5	0.8	0.6	0.9	0.7	1.5	1.0	3.0	6.0	0.2	0.4	1.0

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]

### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2					
5.00	3.35	3.37	0.02	20.64	1.97	1.65	1.65
16.25	3.29	3.32	0.02	20.72	1.97	1.67	1.66
27.50	3.31	3.33	0.02	20.63	1.96	1.67	1.66
38.75	3.36	3.36	0.00	20.62	1.96	1.67	1.66
50.00	3.42	3.44	0.02	20.68	1.95	1.67	1.66
55.00	3.44	3.46	0.03	20.72	1.95	1.67	1.66
291.25	3.64	3.63	0.01	21.61	1.95	1.67	1.66
527.50	3.45	3.44	0.01	23.58	1.87	1.68	1.67
763.75	3.58	3.55	0.03	27.96	1.78	1.64	1.63
1000.00	3.60	3.60	0.01	31.13	1.62	1.61	1.60
1010.00	3.60	3.60	0.01	30.84	1.58	1.59	1.57
1257.50	3.52	3.51	0.01	23.43	1.47	1.55	1.54
1505.00	3.51	3.51	0.00	18.34	1.27	1.50	1.49
1752.50	3.56	3.62	0.06	15.03	1.08	1.45	1.43
2000.00	4.08	4.13	0.04	12.81	1.12	1.36	1.35

1. Total Loss = Insertion Loss + 3dB splitter loss.

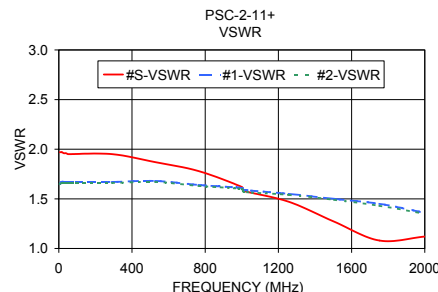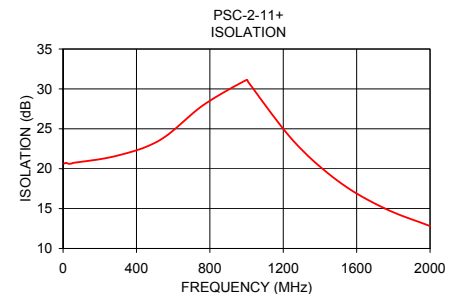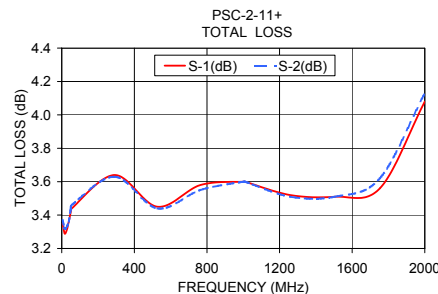

### electrical schematic



### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

