

Surface Mount

Voltage Controlled Oscillator

ROS-70-219+

5V Tuning for PLL IC's 50 to 70 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- aqueous washable



CASE STYLE: CK605

Applications

- cable TV
- avionics

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING				NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER				
	Min.	Max.		Typ.	Typ.				VOLTAGE RANGE (V)	SENSITIVITY (MHz/V)	PORT CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Max.	Typ.	Max.	Vcc (volts)	Current (mA)
					1	10	100	1000													
ROS-70-219+	50	70	-0.5	-90	-110	-130	-150	0.5	5	7	370	0.2	-90	-11	-	0.01	0.4	5	23		

Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

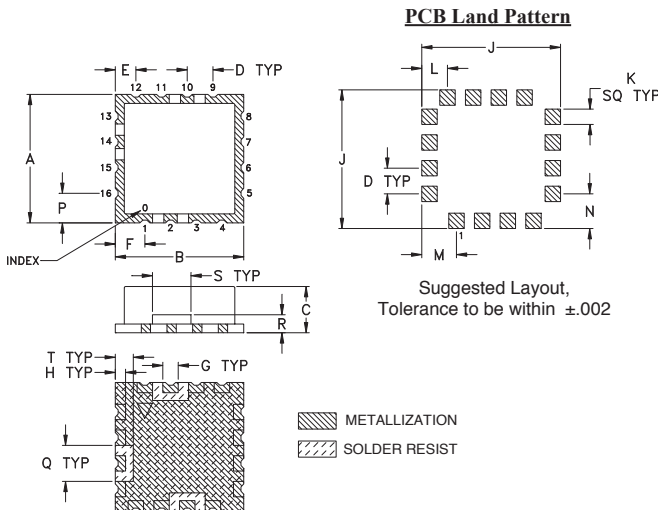

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

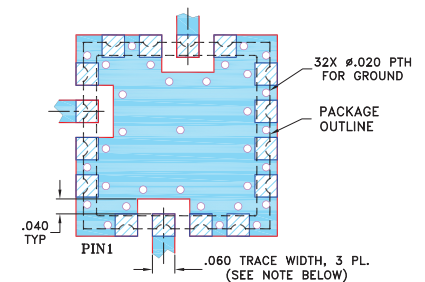

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. A
 M151108
 EDR-7938F1
 ROS-70-219+
 RAV
 150917
 Page 1 of 2

Performance Data & Curves*

ROS-70-219+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 60 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	10.95	41.3	40.2	38.9	-1.40	-1.06	-1.23	16.59	-12.3	-20.5	-28.2	0.75	0.05	-85.8	-107.4	-127.3	-147.5	1.0	-90.16
0.50	8.49	45.8	45.3	44.6	-1.27	-0.60	-0.60	16.49	-12.0	-21.8	-31.2	0.75	0.04	-87.4	-107.8	-128.1	-148.1	2.0	-97.68
0.75	7.56	47.8	47.4	46.8	-1.23	-0.55	-0.54	16.49	-11.8	-21.9	-31.8	0.62	0.03	-87.1	-110.3	-129.8	-149.3	3.5	-101.94
1.00	7.24	49.7	49.3	48.8	-1.19	-0.52	-0.50	16.50	-11.7	-21.9	-32.1	0.53	0.02	-89.7	-111.5	-130.8	-150.1	6.0	-106.23
1.25	6.99	51.5	51.1	50.6	-1.20	-0.49	-0.48	16.53	-11.6	-21.8	-32.5	0.59	0.02	-90.1	-112.3	-131.0	-150.6	8.5	-110.52
1.50	6.67	53.3	52.9	52.4	-1.22	-0.46	-0.44	16.56	-11.4	-21.6	-32.9	0.49	0.01	-90.8	-112.1	-131.0	-150.9	10.0	-110.85
1.75	6.47	54.9	54.5	54.1	-1.23	-0.42	-0.40	16.59	-11.4	-21.5	-33.3	0.41	0.01	-90.1	-111.3	-131.0	-150.8	20.8	-116.85
2.00	6.36	56.5	56.2	55.7	-1.24	-0.39	-0.38	16.60	-11.2	-21.4	-33.5	0.36	0.01	-91.5	-111.1	-130.8	-150.3	35.5	-122.34
2.25	6.31	58.1	57.8	57.3	-1.30	-0.42	-0.37	16.61	-11.1	-21.3	-33.6	0.33	0.01	-92.3	-111.6	-130.7	-149.9	60.7	-126.35
2.50	6.30	59.7	59.3	58.9	-1.33	-0.43	-0.36	16.62	-11.0	-21.3	-33.6	0.31	0.01	-90.3	-111.1	-130.6	-149.9	86.7	-129.28
2.75	6.31	61.3	60.9	60.5	-1.38	-0.43	-0.37	16.63	-10.9	-21.3	-33.6	0.31	0.01	-90.2	-111.1	-130.5	-149.9	100.0	-130.24
3.00	6.34	62.9	62.5	62.1	-1.43	-0.46	-0.37	16.63	-10.8	-21.2	-33.6	0.31	0.01	-90.1	-110.9	-130.2	-150.0	148.1	-133.69
3.25	6.39	64.5	64.1	63.7	-1.50	-0.47	-0.37	16.63	-10.8	-21.2	-33.7	0.33	0.01	-88.3	-110.1	-130.0	-149.4	177.0	-135.08
3.50	6.44	66.1	65.7	65.3	-1.58	-0.52	-0.40	16.63	-10.7	-21.1	-33.8	0.36	0.01	-87.3	-110.4	-129.5	-149.3	211.6	-136.47
3.75	6.50	67.7	67.3	66.9	-1.64	-0.57	-0.42	16.62	-10.7	-21.0	-33.8	0.39	0.01	-88.3	-110.1	-129.3	-148.7	302.4	-139.70
4.00	6.56	69.4	68.9	68.6	-1.73	-0.61	-0.48	16.62	-10.6	-21.0	-33.8	0.43	0.02	-88.9	-108.6	-128.8	-148.8	361.5	-141.12
4.25	6.62	71.0	70.5	70.2	-1.82	-0.67	-0.54	16.62	-10.7	-21.0	-33.8	0.48	0.02	-87.0	-108.2	-128.5	-148.3	507.5	-144.25
4.50	6.68	72.7	72.2	71.9	-1.91	-0.74	-0.57	16.62	-10.6	-21.1	-33.9	0.54	0.03	-87.7	-108.2	-128.1	-148.0	606.7	-145.66
4.75	6.73	74.4	73.9	73.5	-2.01	-0.79	-0.63	16.62	-10.6	-21.2	-34.1	0.59	0.03	-86.2	-107.4	-127.7	-147.8	851.6	-149.02
5.00	6.77	76.1	75.5	75.2	-2.09	-0.85	-0.66	16.61	-10.6	-21.3	-34.3	0.65	0.03	-86.1	-106.8	-127.2	-147.7	1000.0	-150.18

*at 25°C unless mentioned otherwise

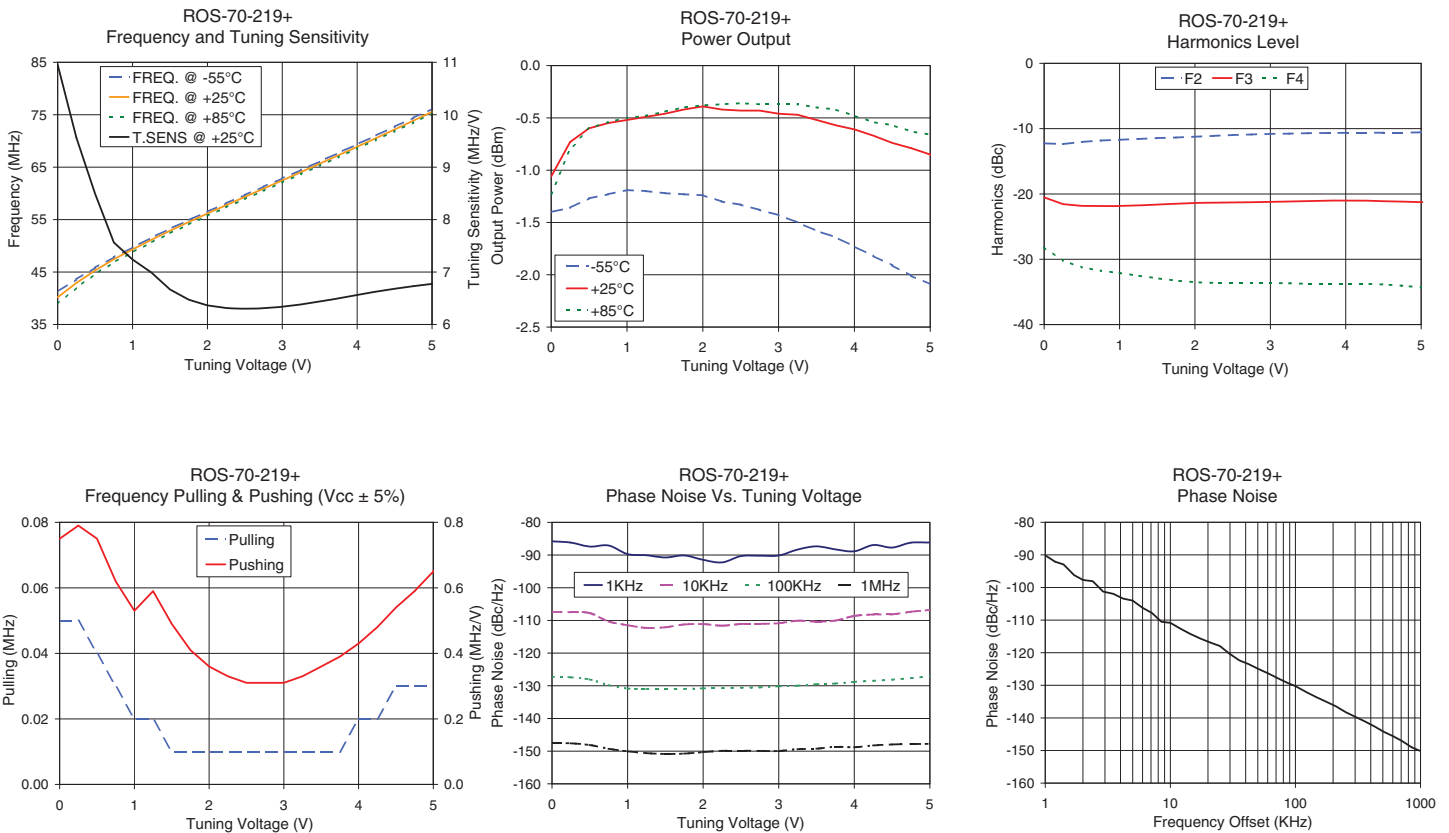

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

