Surface Mount High Isolation Switch

50Ω DC to 2500 MHz

The Big Deal

- Footprint Compatible with RSW-2-25P+^a
- High Isolation, 50 dB typ. at 1 GHz
- Fast Switching, 3 ns typ. Rise/fall Time



RSW-2-25PA+

CASE STYLE: CL620-1

Product Overview

The RSW-2-25PA+ is a 50Ω high isolation, reflective SPDT RF switch designed for wireless applications, covering a broad frequency range from DC to 2500 MHz. This model is footprint compatible with Mini-Circuits' model number RSW-2-25P+ which is at End of Life. It provides very fast switching time of 14 ns and operates on a single positive supply voltage.

Key Features

| Feature | Advantages | | |
|---|--|--|--|
| High isolation; 50 dB typ. at 1 GHz 33 dB typ. At 2.5 GHz | With one switch, high isolation can be achieved, saving component count. | | |
| Fast switching 3 ns. rise/fall Time 14 ns switching Time | Most competitive switches have slow switching time of the order of µs. The RSW-2-25PA+ is ideally suited for applications requiring fast switching time of the order of ns. | | |
| Positive voltage operation | Eliminates need for negative voltage which is generally required for fast switching, simplifying circ layout. | | |
| Footprint compatible with RSW-2-25P+ | Both RSW-2-25P+ & RSW-2-25PA+ use the same suggested foot print. RSW-2-25P+ is at end of Life. RSW-2-25PA+ can be used in its place without PCB re-design at the customer end. | | |

Notes:

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

Surface Mount High Isolation Switch

SPDT Reflective, Single Supply Voltage, +5V

Product Features

- Wide bandwidth, DC to 2500 MHz
- High Isolation, 50 dB typ. at 1 GHz
- Fast switching, 3ns rise/fall time
- Dual positive control
- Aqueous washable

Typical Applications

- Automated switching networks
- Transmitters and Receivers

RSW-2-25PA+

50Ω DC-2500 MHz



Generic photo used for illustration purposes only


CASE STYLE: CL620-1


+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

The RSW-2-25PA+ is a 50Ω high isolation, reflective SPDT RF switch designed for wireless applications, covering a broad frequency range from DC to 2500 MHz is footprint compatible with Mini-Circuits' model RSW-2-25P+.



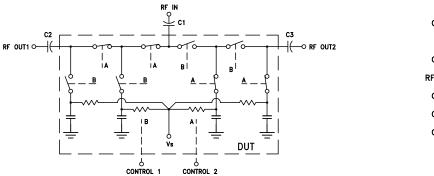



| Function | Pad Number | Description (Reference to Fig. 2) |
|-----------|-------------------|--|
| RF IN | 4 | RF Common / Sum Port, Pad 4 connected to RF IN via C1 |
| RF OUT 1 | 14 | RF Out #1 / IN Port #1, Pad 14 connected to RF OUT1 via C2 |
| RF OUT 2 | 8 | RF Out #1 / IN Port #2, Pad 8 connected to RF OUT2 via C3 |
| VS | 2 | DC Positive Supply Voltage |
| Control 1 | 12 | Control Port #1 |
| Control 2 | 10 | Control Port #2 |
| GND | 1,3,5,6,7,9,11,13 | RF Ground |

REV. A M151107 RSW-2-25PA+ RS/CP 150924 Page 2 of 5

RF Electrical Specifications^{1,2}, DC - 2500 MHz, Vs=+5V, T_{AMB}=25°C

| Parameter | Condition | Min. | Тур. | Max. | Units | |
|--|--------------|------|------|------|-------|--|
| | (MHz) | | 51 | - | | |
| Frequency Range (Note 2) | | DC | | 2500 | MHz | |
| | DC to 100 | | 0.5 | 0.9 | | |
| | 100 to 1000 | | 0.7 | 1.1 | dB | |
| Insertion Loss | 1000 to 2000 | | 0.9 | 1.5 | uв | |
| | 2000 to 2500 | | 1.2 | 1.8 | | |
| | DC to 100 | 55 | 80 | | | |
| | 100 to 1000 | 44 | 54 | | | |
| IN-OUT Isolation | 1000 to 2000 | 34 | 43 | | dB | |
| | 2000 to 2500 | 26 | 33 | | | |
| Return Loss, all ports (ON STATE) | | | 17.6 | | dB | |
| Return Loss @ RF OUT PORTS (OFF STATE) | | | | 5.0 | dB | |
| | 10 | | 33 | | | |
| | 100 | | 38 | | | |
| Input IP3 | 500 | | 39 | | dBm | |
| | 1000 | | 38 | | | |
| | 2500 | | 41 | | | |
| | 10 | | 13 | | | |
| | 100 | | 18 | | | |
| Input 1dB Compression ⁽³⁾ | 500 | | 29 | | dBm | |
| F F | 1000 | | 29 | | | |
| | 2500 | | 28 | | | |

Notes: 1. Tested on Mini-Circuits Test Board TB-23A+ (See Characterization Circuit, Fig 1) 2. All RF ports must be DC blocked

DC Electrical Specifications

| Parameter | Min. | Тур. | Max. | Units |
|-------------------------|--------|------|------|-------|
| Vs, Supply Voltage | 5 | | 7 | V |
| Supply Current (Vs= 5V) | | 30 | | μA |
| Control Voltage Low | 0 | | 0.2 | V |
| Control Voltage High | Vs-0.2 | | Vs | V |
| Control Current | | 30 | | μA |

Switching Specifications at Vs=5V

| Parameter | Min. | Тур. | Max. | Units |
|--|------|------|------|-------------------|
| Rise/Fall Time (10 to 90% or 90 to 10% RF) | | 3 | | nSec |
| Switching Time (50% CTRL to 90/10% RF) | | 14 | | nSec |
| Video Leakage ³ | | 44 | | mV _{P-P} |

3. Video leakage or break through is defined as leakage of switching signal to RF output ports.

Absolute Maximum Ratings⁴

| Parameter | Ratings |
|-----------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Vs, Supply Voltage | +8V |
| Control Voltage | +8V |
| RF input power⁵ | 1W (>10 MHz) |

4. Permanent damage may occur if any of these limits are exceeded.

5. Above 25°C, derate linearly to zero at 150°C.

Truth Table (State of control voltage selects the desired switch state)

| State of Control Voltage | | Switch State - RF IN to | | |
|--|-----------|-------------------------|----------|--|
| Control 1 | Control 2 | RF OUT 1 | RF OUT 2 | |
| Low | High | ON | OFF | |
| High | Low | OFF | ON | |
| ON- low insertion loss state OFF- Isolation State | | | | |

Characterization Test Circuit

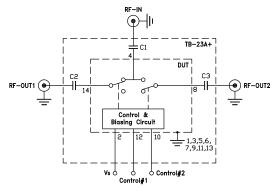


Figure 1 Block Diagram Of Test Circuit Used For Characterization. (DUT soldered on Mini-Circuit's TB-23A+)

Test Equipment:

For Insertion loss, Isolation, Return loss:

Agilent's N5230A Network Analyzer, E3631A power supply.

For Switching Time and Video Feed through

Agilent's AG54832B HP81110A pulse generator, HPE3631A Network Analyzer , E3631A power supply. Agilent's N90A Spectrum Analyzer , E8257D Generator U200A


For Compression:

Agilent's N5230A Network Analyzer.

Conditions:

Control= 0 and Vs For Insertion loss, isolation and return loss: Vs= +5/7V. Pin=0 dBm For P1dB: Vs= +7V For Input IP3: Vs= +5V, Pin=+0dBm/tone, 1 MHz tone spacing. For Switching time: RF frequency: 100 MHz at 0 dBm, Control Frequency: 10 KHz and 0 and +5V.

Recommended Application Circuit

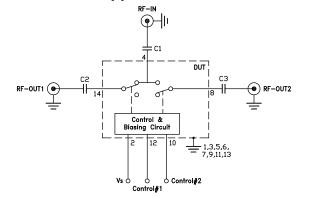

Product Marking




Figure 2 Test Board TB-23A+ includes case connectors & components soldered to PCB. C1, C2, C3=0.1µF, 0805 size

| Additional Detailed Technical Information additional information is available on our dash board. To access this information <u>click here</u> | | | | |
|--|--|--|--|--|
| Performance Data | Data Table | | | |
| | Swept Graphs | | | |
| Case Style | CL620-1, Base: FR4 PCB, Termination Finish: Gold over Nickel | | | |
| F43 | | | | |
| Standard quantities available on reel | 7" reels with 500 devices | | | |
| Suggested Layout for PCB Design | PL-444 | | | |
| Evaluation Board | TB-23A+ | | | |
| Environmental Ratings | ENV65 | | | |

ESD Rating

Human Body Model (HBM): Class 1B (500 to <1000V) in accordance with ANSI/ESD STM 5.1 - 2007

Machine Model (MM): Class M2 (100 to <200V) in accordance with ANSI/ESD STM5.2-1999

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp