SSN-3132A-119+

2932 to 3132 MHz **50**Ω

The Big Deal

- Fractional N synthesizer
- Low phase noise and spurious
- Very small size 0.60" x 0.60" x 0.138"



CASE STYLE: KJ1367

Product Overview

The SSN-3132A-119+ is a Frequency Synthesizer, designed to operate from 2932 to 3132 MHz for WiMAX application. The SSN-3132A-119+ is packaged in a metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise.

Key Features

| Feature | Advantages |
|--|--|
| Low phase noise and spurious: • Phase Noise: -95 dBc/Hz typ. @ 10 kHz offset • Step Size Spurious: -94 dBc typ. • Comparison Spurious: -83 dBc typ. • Reference Spurious: -83 dBc typ. | Low phase noise and spurious improve system EVM (Error Vector Magnitude). |
| Robust design and construction | To enhance the robustness of SSN-3132A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer. |
| Small size, 0.60" x 0.60" x 0.138" | The small size enables the SSN-3132A-119+ to be used in compact designs. |

Notes A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuit standard limited warranty and terms and conditions (collective), "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.js



Surface Mount **Frequency Synthesizer**

50Ω 2932 to 3132 MHz

Features

- Fractional N synthesizer
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+4.85V, VCC PLL=+3.2V)
- Small size 0.60" x 0.60" x 0.138"


Applications

A. B.

WiMAX

General Description

The SSN-3132A-119+ is a Frequency Synthesizer, designed to operate from 2932 to 3132 MHz for WiMAX application. The SSN-3132A-119+ is packaged in a metal case (size of 0.60" x 0.60" x 0.138") to shield against unwanted signals and noise. To enhance the robustness of SSN-3132A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

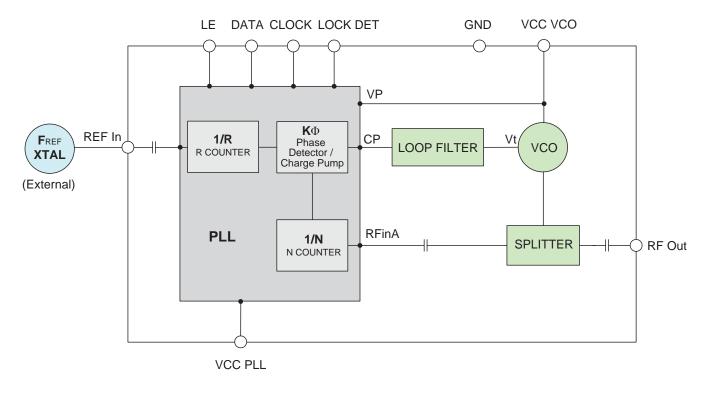

Simplified Schematic



Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com



SSN-3132A-119+

CASE STYLE: KJ1367

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



SSN-3132A-119+

Electrical Specifications (over operating temperature -40°C to +85°C)

| Parameters | | Test Conditions | Min. | Тур. | Max. | Units | |
|------------------------------|----------------------------|-------------------------|-----------------------------------|--------------|------------|------------------|--|
| Frequency Range | | - | 2932 | - | 3132 | MHz | |
| Step Size | | - | - | 250 | - | kHz | |
| Comparison Frequency | | - | - | 26 | - | MHz | |
| Settling Time | | Within ± 1 kHz | - | 9 | - | mSec | |
| Output Power | | - | 0 | +2.5 | +6.0 | dBm | |
| · | | @ 100 Hz offset | - | -74 | - | | |
| | | @ 1 kHz offset | - | -88 | -83 | 1 | |
| SSB Phase Noise | | @ 10 kHz offset | - | -95 | -90 | dBc/Hz | |
| | | @ 100 kHz offset | - | -119 | -113 | | |
| | | @ 1 MHz offset | - | -140 | -134 | | |
| Integrated SSB Phase Noise | | @1kHz to 10MHz | - | -50 | - | dBc | |
| Step Size Spurious Suppress | ion | Step Size 250 kHz | - | -94 | -70 | | |
| 0.5 Step Size Spurious Suppr | ression | 0.5 Step Size 125 kHz | - | -84 | -60 | | |
| Reference Spurious Suppress | sion | Ref. Freq. 52 MHz | - | -83 | -74 | | |
| Comparison Spurious Suppre | ession | Comp. Freq. 26 MHz | - | -83 | -75 | - dBc | |
| Non - Harmonic Spurious Sup | pression | - | - | -90 | - | | |
| Harmonic Suppression | | - | - | -27 | -17 | | |
| VCO Supply Voltage | | +4.85 | +4.75 | +4.85 | +5.25 | - v | |
| PLL Supply Voltage | | +3.20 | +3.10 | +3.20 | +3.30 | - V | |
| VCO Supply Current | | - | - | 44 | 51 | | |
| PLL Supply Current | | - | - | 16 | 24 | — mA | |
| | Frequency | 52 (square wave) | - | 52 | - | MHz | |
| Reference Input | Amplitude | 1 | - | 1 | - | V _{P-P} | |
| (External) | Input impedance | - | - | 100 | - | ΚΩ | |
| | Phase Noise @ 1 kHz offset | - | - | -130 | - | dBc/Hz | |
| RF Output port Impedance | • | - | - | 50 | - | Ω | |
| | Input high voltage | - | 2.65 | - | - | V | |
| Input Logic Level | Input low voltage | - | - | - | 0.60 | V | |
| Distinct Lands Data at | Locked | - | 2.70 | - | 3.70 | V | |
| Digital Lock Detect | Unlocked | - | - | - | 0.40 | V | |
| Frequency Synthesizer PLL | - | ADF4153 | • | | | | |
| PLL Programming | - | 3-wire serial 3.2V CMOS | | | | | |
| U | R0_Register | - | (MSB) 111 | 10000000001 | 1000000 (L | SB) | |
| | R1_Register | - | (MSB) 101001000000110100001 (LSB) | | | | |
| Register Map @ 3132 MHz | R2_Register | - | (MSB) 1111100010 (LSB) | | | | |
| | R3_Register | - | (MSB) 111 | 1000111 (LSI | B) | | |

Absolute Maximum Ratings

| Parameters | Ratings |
|--|----------------------------|
| VCO Supply Voltage | 5.8V |
| PLL Supply Voltage | 4.0V |
| VCO Supply Voltage to PLL Supply Voltage | -0.3V to +5.8V |
| Reference Frequency Voltage | -0.3Vmin, VCC PLL +0.3Vmax |
| Data, Clock, LE Levels | -0.3Vmin, VCC PLL +0.3Vmax |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +100°C |

Permanent damage may occur if any of these limits are exceeded

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

Frequency Synthesizer

Typical Performance Data

| FREQUENCY | PO | POWER OUTPUT | | | VCO CURRENT | | | PLL CURENT | | |
|-----------|-------|--------------|-------|-------|-------------|-------|-------|------------|-------|--|
| (MHz) | | (dBm) | | | (mA) | | (mA) | | | |
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | |
| 2932 | 2.85 | 2.75 | 2.79 | 42.17 | 43.78 | 45.22 | 14.74 | 15.83 | 18.08 | |
| 2944 | 2.62 | 2.59 | 2.62 | 42.20 | 43.80 | 45.24 | 14.69 | 15.78 | 18.04 | |
| 2966 | 2.25 | 2.39 | 2.23 | 42.25 | 43.87 | 45.29 | 14.44 | 15.52 | 17.76 | |
| 2988 | 2.48 | 2.45 | 2.27 | 42.34 | 43.93 | 45.36 | 14.50 | 15.59 | 17.84 | |
| 3010 | 2.71 | 2.73 | 2.57 | 42.40 | 43.99 | 45.42 | 14.74 | 15.85 | 18.10 | |
| 3032 | 2.65 | 2.68 | 2.58 | 42.43 | 44.02 | 45.45 | 14.86 | 15.97 | 18.24 | |
| 3054 | 2.50 | 2.46 | 2.51 | 42.45 | 44.05 | 45.47 | 14.96 | 16.08 | 18.35 | |
| 3076 | 2.15 | 2.32 | 2.21 | 42.50 | 44.10 | 45.51 | 14.75 | 15.86 | 18.12 | |
| 3098 | 2.03 | 2.23 | 2.00 | 42.57 | 44.16 | 45.57 | 14.56 | 15.66 | 17.90 | |
| 3120 | 2.64 | 2.52 | 2.28 | 42.64 | 44.21 | 45.61 | 12.71 | 13.71 | 15.90 | |
| 3132 | 2.78 | 2.68 | 2.60 | 42.66 | 44.23 | 45.64 | 14.96 | 16.07 | 18.34 | |

| FREQUENCY | HARMONICS (dBc) | | | | | | | |
|-----------|-----------------|--------|--------|--------|--------|--------|--|--|
| (MHz) | | F2 | | F3 | | | | |
| | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | | |
| 2932 | -25.45 | -26.52 | -29.28 | -37.06 | -35.69 | -40.56 | | |
| 2944 | -26.50 | -27.59 | -29.00 | -36.67 | -37.51 | -43.79 | | |
| 2966 | -25.33 | -26.75 | -27.29 | -39.61 | -36.90 | -42.67 | | |
| 2988 | -23.58 | -24.18 | -28.90 | -38.46 | -38.80 | -44.96 | | |
| 3010 | -26.88 | -27.25 | -27.30 | -39.96 | -41.57 | -53.34 | | |
| 3032 | -22.77 | -25.80 | -26.84 | -42.64 | -45.76 | -58.30 | | |
| 3054 | -25.91 | -25.23 | -29.23 | -48.69 | -51.57 | -55.03 | | |
| 3076 | -25.33 | -24.61 | -27.24 | -45.11 | -50.41 | -46.65 | | |
| 3098 | -23.54 | -24.99 | -24.34 | -46.86 | -48.51 | -43.34 | | |
| 3120 | -23.96 | -28.23 | -30.18 | -47.59 | -48.29 | -42.60 | | |
| 3132 | -24.05 | -25.40 | -25.61 | -43.68 | -47.77 | -42.04 | | |

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Min-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Min-Circuit standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and memodies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Synthesizer

| FREQUENCY | PHASE NOISE (dBc/Hz) @OFFSETS | | | | | | | | |
|-----------|-------------------------------|--------|--------|---------|---------|--|--|--|--|
| (MHz) | +25°C | | | | | | | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz | | | | |
| 2932 | -78.59 | -88.09 | -95.53 | -118.24 | -139.32 | | | | |
| 2944 | -77.70 | -90.62 | -95.84 | -118.30 | -139.40 | | | | |
| 2966 | -77.97 | -88.64 | -95.82 | -118.70 | -139.81 | | | | |
| 2988 | -78.21 | -88.97 | -95.64 | -118.90 | -139.87 | | | | |
| 3010 | -80.68 | -87.99 | -95.25 | -119.16 | -140.14 | | | | |
| 3032 | -78.45 | -88.41 | -95.26 | -119.20 | -140.14 | | | | |
| 3054 | -77.87 | -87.52 | -94.91 | -118.99 | -139.68 | | | | |
| 3076 | -78.01 | -86.88 | -95.31 | -118.98 | -139.67 | | | | |
| 3098 | -77.98 | -89.12 | -95.04 | -118.96 | -139.77 | | | | |
| 3120 | -76.86 | -88.70 | -95.51 | -118.69 | -139.87 | | | | |
| 3132 | -77.34 | -90.38 | -94.77 | -118.67 | -139.79 | | | | |

| FREQUENCY | PH | ASE NOIS | E (dBc/Hz |) @OFFSE | TS | FREQUENCY | PH | ASE NOIS | E (dBc/Hz |) @OFFSE | тѕ |
|-----------|--------|----------|-----------|----------|---------|-----------|--------|----------|-----------|----------|---------|
| (MHz) | | | -45°C | | | (MHz) | | | +85°C | | |
| | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz | | 100Hz | 1kHz | 10kHz | 100kHz | 1MHz |
| 2932 | -80.08 | -89.83 | -97.48 | -118.80 | -140.28 | 2932 | -81.24 | -90.08 | -95.60 | -117.30 | -138.31 |
| 2944 | -78.70 | -88.02 | -97.39 | -119.02 | -140.47 | 2944 | -81.00 | -89.78 | -95.69 | -117.40 | -138.26 |
| 2966 | -76.97 | -89.61 | -97.02 | -119.16 | -140.73 | 2966 | -77.86 | -89.05 | -95.53 | -117.63 | -138.41 |
| 2988 | -76.02 | -90.04 | -97.05 | -119.59 | -141.03 | 2988 | -81.08 | -88.67 | -95.17 | -117.78 | -138.70 |
| 3010 | -77.60 | -89.37 | -96.26 | -119.90 | -141.23 | 3010 | -76.59 | -89.65 | -94.89 | -117.80 | -138.80 |
| 3032 | -78.20 | -88.62 | -96.99 | -119.77 | -141.13 | 3032 | -77.75 | -87.98 | -95.28 | -117.69 | -138.51 |
| 3054 | -76.05 | -87.75 | -96.50 | -119.66 | -140.88 | 3054 | -83.61 | -89.16 | -94.73 | -117.60 | -138.48 |
| 3076 | -75.94 | -89.47 | -95.52 | -119.88 | -141.12 | 3076 | -78.29 | -89.55 | -94.20 | -117.42 | -138.38 |
| 3098 | -76.63 | -89.15 | -95.95 | -119.85 | -141.21 | 3098 | -79.24 | -89.10 | -94.49 | -117.31 | -138.29 |
| 3120 | -80.70 | -88.41 | -96.18 | -119.86 | -141.62 | 3120 | -79.63 | -88.39 | -93.78 | -117.25 | -138.06 |
| 3132 | -78.69 | -87.43 | -96.15 | -119.85 | -141.13 | 3132 | -78.68 | -89.46 | -93.21 | -117.22 | -138.10 |

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Min-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Min-Circuit's tandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and memodies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance estable estable estable established test performance estable estable establishe

Frequency Synthesizer

| COMPARISON SPURIOUS ORDER | COMPARISON SPURIOUS @Fcarrier 2932MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 3032MHz+(n*Fcomparison) (dBc) note 1 | | | COMPARISON SPURIOUS @Fcarrier 3132MHz+(n*Fcomparison) (dBc) note 1 | | |
|---------------------------------|---|--------|--------|---|--------|--------|---|--------|--------|
| n | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -82.34 | -83.86 | -85.22 | -83.66 | -84.86 | -86.32 | -83.79 | -84.76 | -86.07 |
| -4 | -83.03 | -82.47 | -82.65 | -84.67 | -84.36 | -84.90 | -84.42 | -84.45 | -86.23 |
| -3 | -86.68 | -89.13 | -87.83 | -88.72 | -89.78 | -87.96 | -89.82 | -88.11 | -88.57 |
| -2 | -88.37 | -86.62 | -87.37 | -89.27 | -88.57 | -87.26 | -88.73 | -90.43 | -89.30 |
| -1 | -90.97 | -88.15 | -91.88 | -88.44 | -87.79 | -91.18 | -88.46 | -87.20 | -84.64 |
| 0 ^{note 2} | - | - | - | - | - | - | - | - | - |
| +1 | -91.28 | -88.86 | -91.20 | -90.24 | -90.64 | -93.60 | -89.31 | -88.57 | -86.51 |
| +2 | -88.06 | -88.16 | -88.29 | -90.56 | -89.69 | -88.33 | -95.24 | -94.13 | -91.15 |
| +3 | -87.90 | -88.85 | -87.68 | -88.02 | -88.75 | -88.81 | -89.09 | -87.78 | -88.70 |
| +4 | -82.48 | -82.53 | -83.22 | -83.75 | -83.82 | -84.38 | -84.42 | -84.63 | -85.21 |
| +5 | -83.11 | -84.96 | -86.31 | -83.70 | -85.22 | -86.47 | -83.61 | -84.75 | -86.27 |

Note 1: Comparison frequency 26 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

| REFERENCE SPURIOUS ORDER | REFERENCE SPURIOUS @Fcarrier 2932MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 3032MHz+(n*Freference) (dBc) note 3 | | | REFERENCE SPURIOUS @Fcarrier 3132MHz+(n*Freference) (dBc) note 3 | | |
|--------------------------------|---|---------|---------|---|---------|---------|---|---------|---------|
| n | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C |
| -5 | -98.13 | -102.48 | -101.21 | -98.23 | -102.07 | -112.10 | -99.99 | -101.70 | -105.05 |
| -4 | -93.90 | -91.25 | -93.34 | -97.84 | -96.05 | -97.70 | -99.72 | -99.91 | -98.79 |
| -3 | -84.80 | -84.55 | -86.36 | -87.01 | -87.71 | -88.14 | -88.32 | -89.21 | -88.90 |
| -2 | -83.01 | -82.53 | -82.67 | -84.60 | -84.28 | -85.00 | -84.32 | -84.52 | -86.22 |
| -1 | -88.44 | -86.66 | -87.30 | -89.24 | -88.53 | -87.51 | -88.68 | -90.45 | -89.21 |
| 0 ^{note 4} | - | - | - | - | - | - | - | - | - |
| +1 | -88.04 | -88.25 | -88.30 | -90.33 | -89.64 | -88.48 | -95.27 | -93.91 | -91.04 |
| +2 | -82.44 | -82.55 | -83.20 | -83.67 | -83.76 | -84.41 | -84.31 | -84.61 | -85.25 |
| +3 | -85.22 | -85.63 | -86.85 | -88.12 | -87.73 | -87.90 | -89.07 | -89.34 | -89.18 |
| +4 | -94.88 | -94.72 | -95.04 | -100.52 | -98.28 | -97.71 | -102.04 | -101.37 | -98.53 |
| +5 | -108.57 | -125.31 | -107.83 | -102.62 | -107.58 | -109.29 | -102.04 | -105.90 | -107.96 |

Note 3: Reference frequency 52 MHz

Note 4: All spurs are referenced to carrier signal (n=0).

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits°

Frequency Synthesizer


| STEP SIZE SPURIOUS ORDER | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 2932MHz+(n*Fstep size) (dBc) note 5 | | | SPU | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 3032MHz+(n*Fstep size) (dBc) note 5 | | | 0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 3132MHz+(n*Fstep size) (dBc) note 5 | | |
|--------------------------------|---|---------|---------|---------|---|---------|---------|---|---------|--|
| n | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | -45°C | +25°C | +85°C | |
| -5.0 | -114.54 | -107.64 | -117.28 | -113.24 | -108.76 | -117.85 | -114.84 | -110.85 | -115.82 | |
| -4.5 | -113.45 | -116.41 | -109.64 | -114.54 | -115.33 | -118.44 | -117.02 | -119.32 | -113.45 | |
| -4.0 | -112.95 | -113.33 | -112.95 | -112.58 | -116.86 | -115.43 | -107.90 | -108.90 | -108.85 | |
| -3.5 | -108.68 | -111.10 | -114.25 | -112.69 | -115.31 | -111.17 | -115.64 | -114.83 | -116.57 | |
| -3.0 | -113.18 | -105.57 | -109.62 | -115.06 | -112.22 | -113.90 | -114.94 | -112.18 | -111.55 | |
| -2.5 | -106.55 | -106.14 | -105.82 | -111.52 | -104.89 | -110.85 | -112.45 | -112.21 | -113.20 | |
| -2.0 | -102.58 | -104.28 | -109.84 | -107.76 | -108.04 | -111.24 | -107.04 | -107.91 | -105.90 | |
| -1.5 | -96.69 | -102.67 | -104.07 | -107.66 | -98.84 | -105.33 | -103.32 | -98.76 | -103.36 | |
| -1.0 | -94.22 | -95.76 | -97.93 | -96.13 | -101.58 | -96.14 | -97.04 | -100.30 | -95.51 | |
| -0.5 | -81.90 | -84.93 | -86.18 | -84.87 | -84.28 | -82.02 | -86.13 | -83.53 | -86.67 | |
| 0 ^{note 6} | - | - | - | - | - | - | - | - | - | |
| +0.5 | -80.95 | -84.83 | -84.82 | -87.56 | -84.49 | -81.29 | -84.19 | -86.23 | -85.17 | |
| +1.0 | -92.94 | -97.89 | -94.98 | -95.68 | -95.11 | -96.08 | -97.64 | -96.48 | -99.00 | |
| +1.5 | -96.25 | -104.54 | -106.50 | -103.69 | -102.07 | -106.58 | -106.08 | -102.12 | -100.26 | |
| +2.0 | -102.96 | -105.84 | -109.21 | -107.12 | -105.97 | -107.70 | -106.64 | -107.31 | -107.90 | |
| +2.5 | -102.43 | -101.67 | -107.28 | -110.29 | -103.00 | -109.57 | -111.07 | -115.02 | -113.54 | |
| +3.0 | -111.47 | -105.76 | -111.86 | -115.42 | -113.50 | -112.14 | -112.65 | -111.24 | -111.90 | |
| +3.5 | -110.36 | -110.63 | -112.33 | -116.61 | -113.18 | -116.71 | -114.52 | -112.76 | -111.33 | |
| +4.0 | -117.38 | -116.41 | -117.76 | -114.32 | -117.35 | -114.52 | -109.15 | -108.70 | -108.50 | |
| +4.5 | -114.30 | -114.59 | -113.60 | -115.48 | -116.16 | -113.71 | -118.09 | -112.96 | -119.16 | |
| +5.0 | -115.48 | -109.82 | -113.34 | -120.04 | -114.97 | -112.64 | -110.16 | -112.81 | -108.40 | |

Note 5: Step size 250 kHz

Note 6: All spurs are referenced to carrier signal (n=0).

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Min-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Min-Circuit's tandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and memodies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance date and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp
Circuit's Applicable established test performance estable estable estable established test performance estable estable establishe


Typical Performance Curves

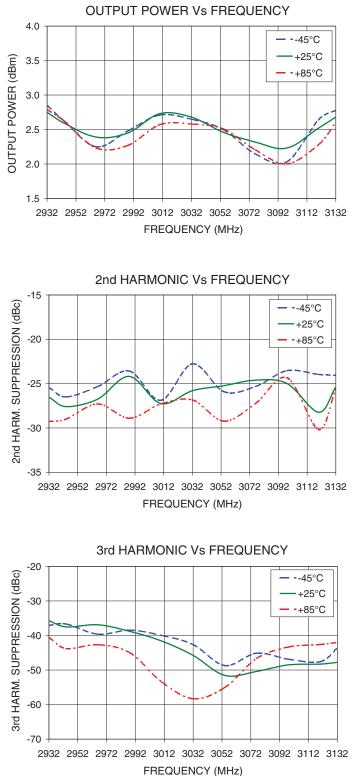

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

SSN-3132A-119+

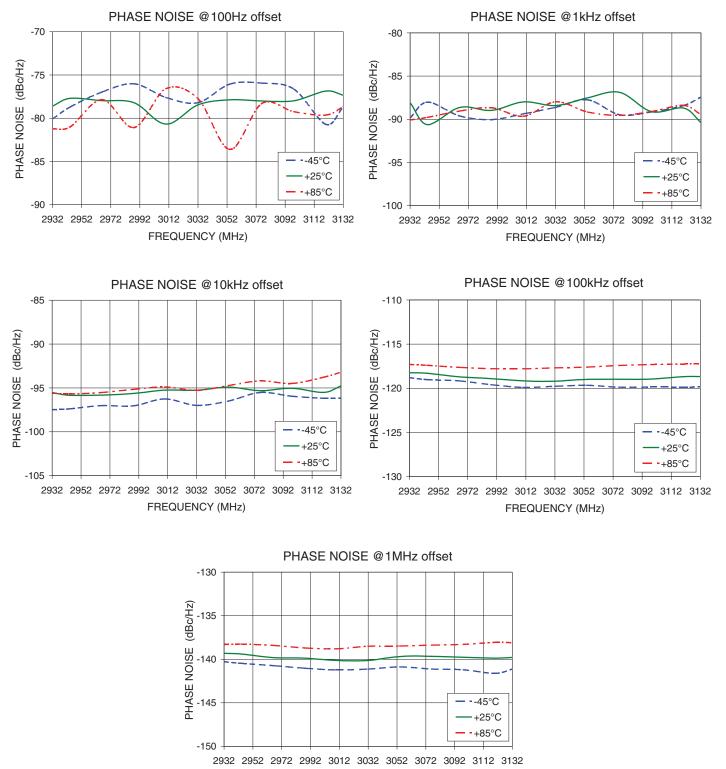


FREQUENCY (MHz)


Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

SSN-3132A-119+

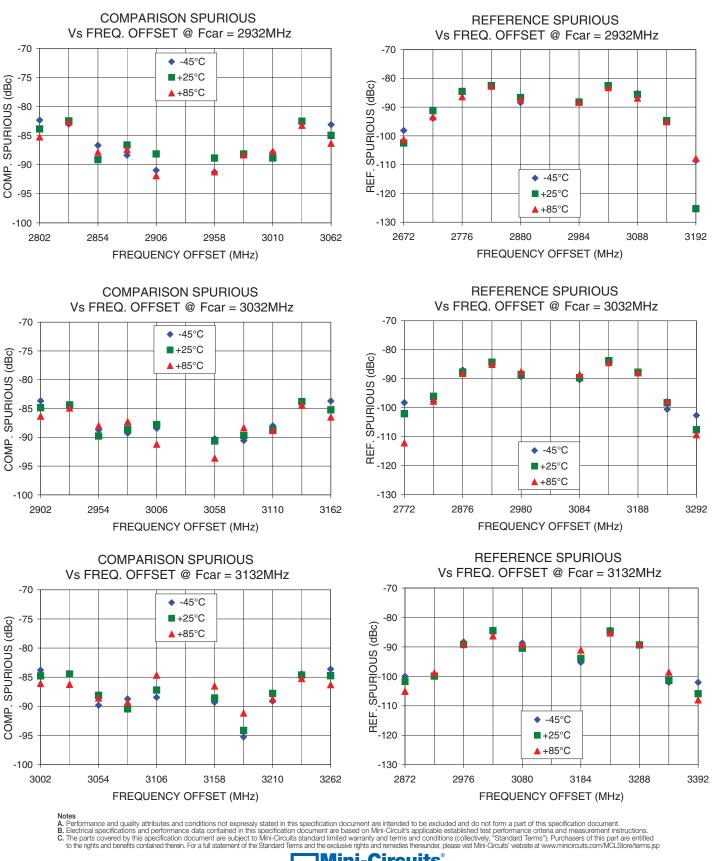


Mini-Circuits

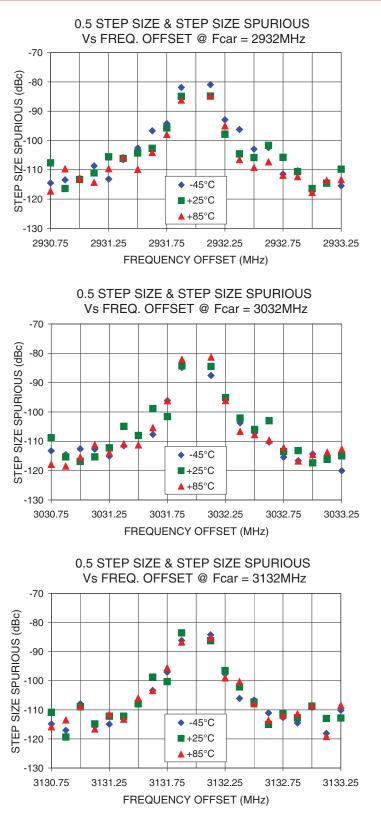

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

Pin Configuration

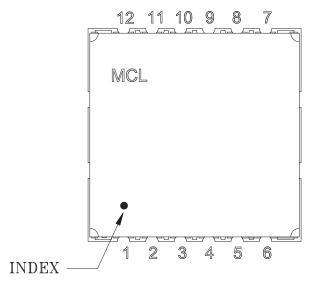


SSN-3132A-119+

Pin Connection

| Pin Number | Function |
|---------------|----------|
| 1 | CLOCK |
| 2 | DATA |
| 3 | ENABLED |
| 4 | REF IN |
| 5 | GND |
| 6 | GND |
| 7 | VCC VCO |
| 8 | GND |
| 9 | RF OUT |
| 10 | GND |
| 11 | LOCK DET |
| 12 | VCC PLL |

Recommended Application Circuit


Note: REF IN and RF OUT ports are internally AC coupled.

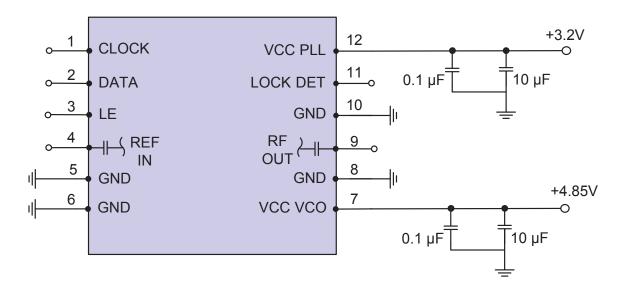

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits

Device Marking

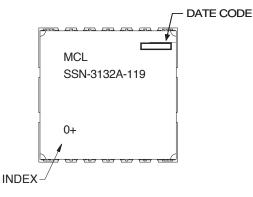

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KJ1367

Tape & Reel: TR-F95

Suggested Layout for PCB Design: PL-317

Evaluation Board: TB-552+

Environment Ratings: ENV65T2

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

