


50Ω Bi-Phase 10 to 1000 MHz



CASE STYLE: TTT166


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

INPUT	1
OUTPUT	2
CONTROL	3
GROUND	4,5,6

### Outline Drawing

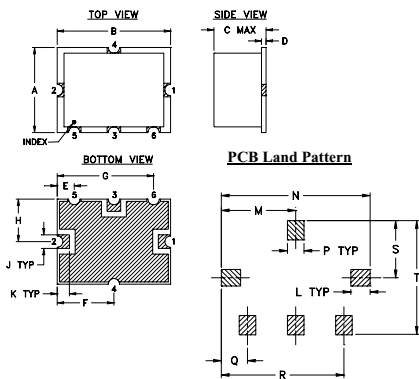


Suggested Layout, Tolerance to be within ±0.02


### Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

### suggested control port biasing configuration

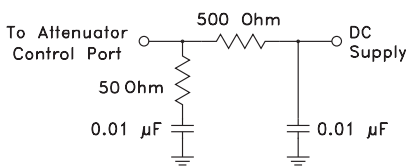

### Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)



- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4380B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wideband 10 to 1000 MHz
- excellent amplitude and phase unbalance

### Applications

- bi-phase modulator

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Attenuator/Switch Electrical Specifications



FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA						BI-PHASE X̄ (±20 mA) Typ.								
			Mid-Band m		Total Range		L	M	U	ΔAMP (dB)		Phase (deg.) deviation from 180°					
IN f <sub>L</sub> -f <sub>U</sub>	CON	1 dB compr.	no damage	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	m	Total Range	m	Total Range		
10-1000	DC-0.05	17*	25	4.0	6.0	4.5	7.0	59	40	42	28	28	20	0.1	0.3	2.0	3.0

L = low range [f<sub>L</sub> to 10 f<sub>L</sub>] M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2] U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>] m = [2 f<sub>L</sub> to f<sub>U</sub>/2]  
 \* 13 dBm from 10-500 MHz.

Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

### Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)	20mA ΔPhase (deg.)	Isolation (dB)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl			Input VSWR			
				(in-out)	(in-con)			10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz	
X	σ	X	X	X	X	X		deg.	deg.	deg.	deg.	deg.	deg.	deg.	deg.		
10.0	3.34	0.009	0.00	180.0	69	47	11.4	0.0000	51.3	24.7	27.2	76.7	40.6	0.5	3.3	2.3	4.2
11.4	3.24	0.006	0.01	180.0	67	46	11.6	0.0001	40.8	22.0	24.7	67.8	31.3	-6.7	3.2	2.2	4.0
16.1	3.17	0.004	0.01	180.1	64	43	12.2	0.0002	35.5	20.5	23.4	61.3	25.4	-10.4	3.2	2.2	3.8
23.2	3.18	0.003	0.00	180.1	59	40	12.5	0.0003	32.1	19.5	22.5	59.5	21.4	-12.8	3.1	2.1	3.7
46.5	3.35	0.002	0.01	180.3	54	34	12.5	0.0008	28.6	18.4	21.4	55.8	17.3	-14.7	3.0	2.0	3.6
65.8	3.24	0.002	0.01	180.5	51	31	12.4	0.0012	25.7	17.1	20.1	53.7	14.1	-15.8	2.9	1.9	3.4
93.1	3.19	0.030	0.01	180.7	48	28	12.4	0.0019	22.8	15.7	18.6	51.0	10.9	-16.0	2.7	1.9	3.2
100.2	3.34	0.003	0.01	180.7	47	28	12.4	0.0029	20.2	14.2	17.0	47.8	8.6	-15.1	2.6	1.7	3.1
131.8	3.36	0.004	0.01	180.9	45	25	12.4	0.0040	17.8	12.7	15.3	45.1	6.8	-13.6	2.4	1.6	2.9
186.6	3.36	0.005	0.02	181.3	42	23	12.3	0.0074	14.6	10.4	12.9	40.1	4.7	-10.7	2.1	1.5	2.7
373.8	3.75	0.008	0.02	182.1	36	20	11.4	0.0110	12.7	9.1	11.5	36.8	3.7	-8.7	1.9	1.4	2.6
500.8	3.93	0.015	0.03	182.5	34	21	11.3	0.0159	11.1	8.0	10.4	33.2	2.8	-7.2	1.7	1.4	2.6
529.1	4.06	0.018	0.04	182.5	33	21	11.2	0.0221	9.7	7.0	9.5	29.5	2.2	-5.3	1.5	1.4	2.5
748.8	4.72	0.055	0.10	182.6	31	19	10.7	0.0301	8.5	6.3	8.8	25.9	1.7	-4.3	1.3	1.4	2.6
791.0	5.13	0.050	0.15	182.8	31	18	10.3	0.0416	7.4	5.8	8.3	22.4	1.0	-3.4	1.2	1.5	2.6
820.5	5.21	0.052	0.15	182.4	32	18	10.1	0.0753	5.9	5.1	7.6	16.2	0.7	-2.1	1.2	1.6	2.6
899.0	5.75	0.063	0.20	182.4	31	15	9.5	0.1640	4.7	4.5	7.0	9.2	0.2	-1.4	1.4	1.8	2.7
932.5	5.97	0.089	0.27	182.0	31	15	9.3	0.3543	4.0	4.2	6.7	5.0	0.0	-0.8	1.6	1.9	2.7
967.2	5.85	0.077	0.24	181.8	31	13	9.1	1.2309	3.6	4.0	6.5	1.7	-0.1	-0.5	1.8	2.0	2.7
1000.0	6.41	0.111	0.38	181.4	31	13	8.8	15.1064	3.4	3.8	6.3	0.0	0.0	-0.1	1.9	2.0	2.7

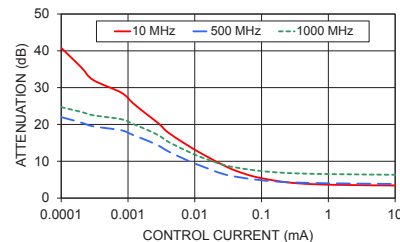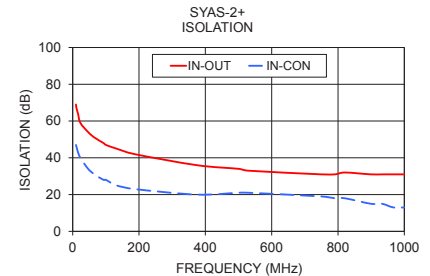

### electrical schematic

