

# Non-Catalog Model


## Frequency Mixer

# TAK-7

Level 7 (LO Power +7 dBm)

### Important Note

This is a non-catalog model and can be manufactured on specific request. Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

**CASE STYLE : A04**

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2		1000	MHz
	RF (fL to fU)	2		1000	MHz
	IF	5		500	MHz
Conversion Loss	mid band		5.9	7.5	dB
	Total Range			8.5	dB
LO-RF Isolation	Low Range	30	45		dB
	Mid Range	20	35		dB
	Upper Range	20	30		dB
LO-IF Isolation	Low Range	30	45		dB
	Mid Range	20	35		dB
	Upper Range	20	30		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL]  
mid band = [2fL to fU/2]


Mid Range = [10fL to fU/2]

Upper Range = [fU/2 to fU]

Hermetically sealed

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

### Electrical Schematics

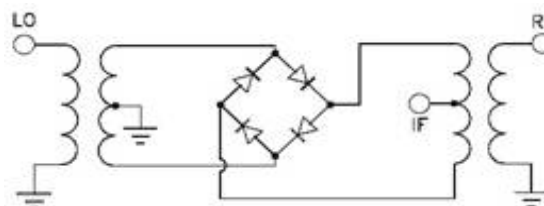

PIN CONNECTIONS	
LO	8
RF	3, 4 ^
IF	1
GROUND	2, 5, 6, 7

^ - pins must be connected together externally