



Mini-Circuits

SURFACE MOUNT

RF Transformer

50Ω

3 to 300 MHz

TC2-1T+

Upgraded Version*
TC2-1TX+

*Addition of Top Hat® Feature Benefits

- Allows Faster Pick-and-Place
- Enables Visual Identification Marking



Generic photo used for illustration purposes only

CASE STYLE: AT224-1A

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

FEATURES

- Good Return Loss
- Excellent Amplitude Unbalance (0.5 dB Typ) and Phase Unbalance (4 deg. Typ) in 1 dB Bandwidth
- Plastic Base with Leads
- Aqueous Washable

APPLICATIONS

- Impedance Matching
- Balanced to Unbalanced Transformation
- Push-Pull Amplifier

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)			2		Ohms
Frequency Range		3		300	MHz
Insertion Loss ¹	-		3		dB
	-		2		
	3-300		1		
Amplitude Unbalance	3-300		0.5		dB
Phase Unbalance	3-300		4		Degree


1. Insertion Loss is referenced to mid-band loss, 0.4 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
RF Power	0.25 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. A

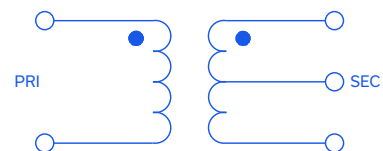

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. J
ECO-025349
TC2-1T+
MCL NY
250428

PAGE 1 OF 3



SURFACE MOUNT

RF Transformer

TC2-1T+

Mini-Circuits

50Ω

3 to 300 MHz


PIN CONNECTIONS

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2


PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-TC2-1T+

OUTLINE DRAWING

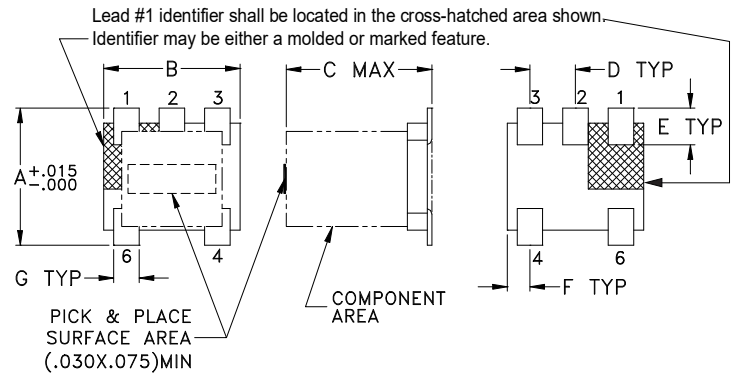

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

TAPE & REEL INFORMATION: F17





SURFACE MOUNT

RF Transformer

TC2-1T+




Mini-Circuits

50Ω

3 to 300 MHz

TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
3.00	0.38	21.63	0.05	0.54
5.00	0.33	20.24	0.04	0.57
10.00	0.34	19.32	0.02	0.45
50.00	0.37	19.41	0.03	0.56
70.00	0.40	19.34	0.04	0.64
100.00	0.44	19.00	0.07	0.86
150.00	0.52	18.11	0.14	1.30
200.00	0.60	17.06	0.25	1.68
300.00	0.80	15.00	0.53	2.44

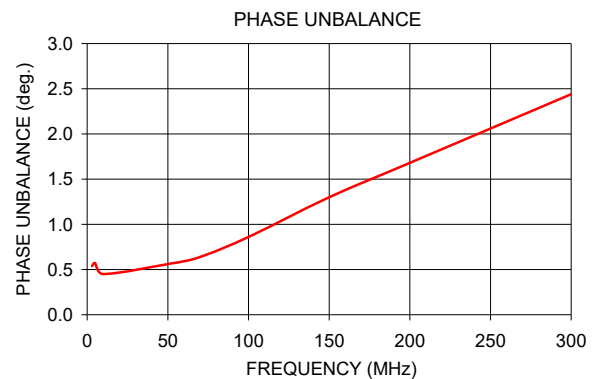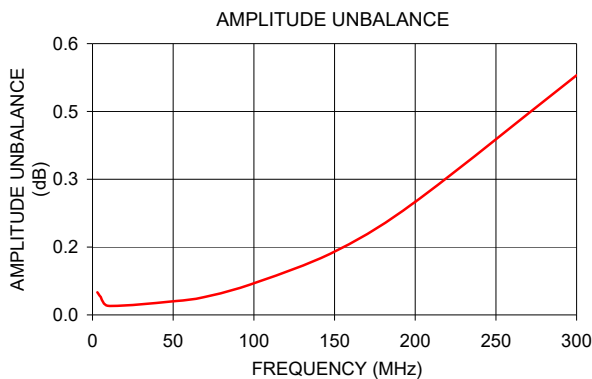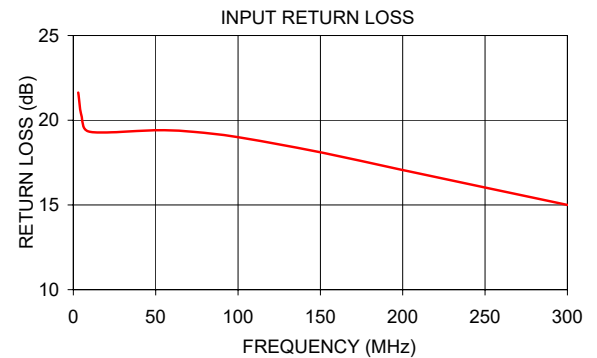

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

