

# Surface Mount Directional Coupler

NON-CATALOG

TCD-10-1W-75

75Ω 10 to 750 MHz



## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

\* Case temperature is defined as temperature on ground leads. Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

## Outline Drawing

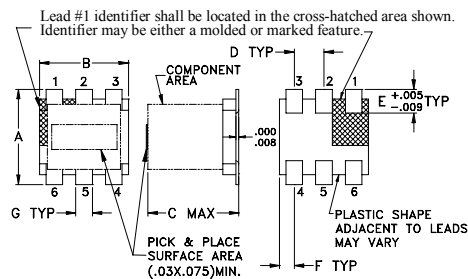


## PCB Land Pattern



## Outline Dimensions (inch)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

## Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-101)

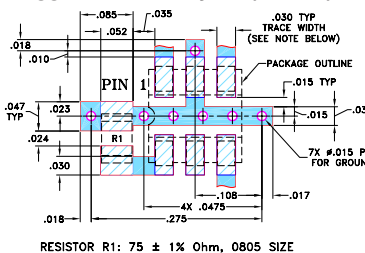

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 10 to 750 MHz
- low mainline loss, 1.4 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

## Applications

- VHF/UHF
- CATV
- communications

CASE STYLE: DB714  
PRICE: Contact Sales Dept.

## Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)						DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W				
	Nom.	Flatness	L		M		U		L	M	U		Typ.	L	MU		
10-750	10.5±0.5	±0.7	1.6	2.1	1.4	1.9	1.5	2.0	22	17	18	14	14	—	1.30	0.5	1.0


L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]

1. Mainline loss includes theoretical power loss at coupled port.


## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
9.00	1.46	10.50	22.09	17.37	24.83	18.42
18.00	1.42	10.49	22.05	17.64	30.73	18.75
24.00	1.43	10.50	22.01	17.64	31.76	18.75
30.00	1.44	10.51	21.95	17.61	30.54	18.73
50.00	1.45	10.53	21.81	17.56	29.29	18.70
70.00	1.46	10.53	21.69	17.57	27.94	18.68
100.00	1.46	10.54	21.52	17.64	27.64	18.69
300.00	1.41	10.49	19.89	18.33	26.14	19.24
500.00	1.38	10.43	17.95	19.30	24.85	19.95
800.00	1.42	10.31	15.43	21.16	24.64	21.29


### MAINLINE LOSS

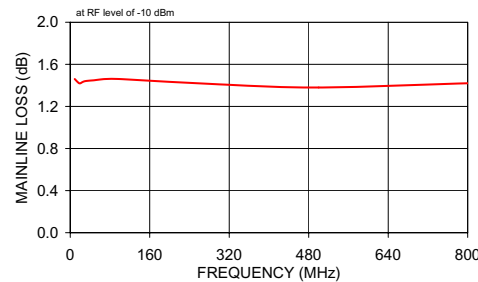


### COUPLING & DIRECTIVITY

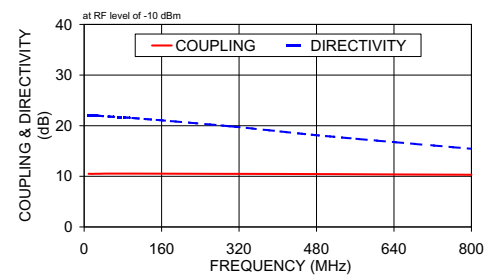

### RETURN LOSS

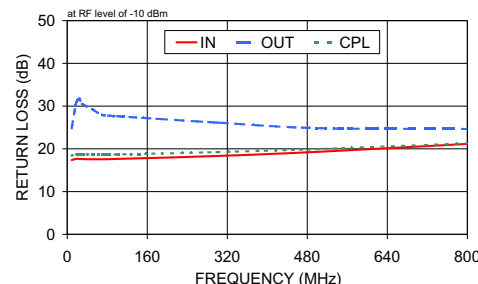

### Electrical Schematic

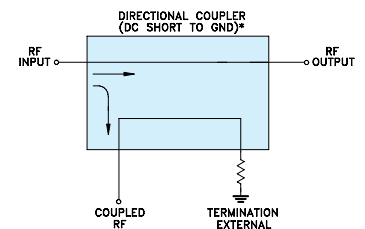

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

For detailed performance specs & shipping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. G  
M135395  
ED-8551  
TCD-10-1W-75+  
WZ/TD/CP/AM  
120110