



Mini-Circuits

MMIC SURFACE MOUNT


Power Splitter/Combiner

WP4P1+

4 Way-0° 50Ω 1525 to 2375 MHz

FEATURES

- Excellent Isolation, Typ. 26 dB
- Excellent Phase Unbalance, Max. 4 deg.
- Excellent Amplitude Unbalance, Max. 0.5 dB
- Small Size, 3x3 mm
- High ESD Level
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- PCS/DCS
- WCDMA
- GPS
- MMDS

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		1525		2375	MHz
Insertion Loss* (Above 6.0 dB)	1525-2375		0.9	2.0	dB
Isolation	1525-2375	15	26		dB
Amplitude Unbalance	1525-2375			0.5	dB
Phase Unbalance	1525-2375			4.0	deg.
VSWR (Port S)	1525-2375		1.5		:1
VSWR (Ports 1,2,3,4)	1525-2375		1.4		:1


*Includes fixture loss, 0.17 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Power Input (as a Splitter)	1.5 W max.
Internal Dissipation	0.375 W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

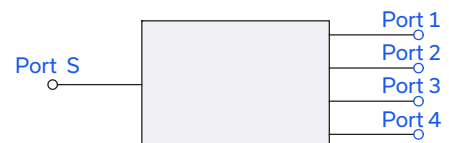REV. E
ECO-026468
WP4P1+
MCL NY
250806

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 3



Power Splitter/Combiner

WP4P1+

4 Way-0° 50Ω 1525 to 2375 MHz

OUTLINE DRAWING

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, Paddle

Figure 1: Dimensions of the package outline. The drawing shows a top-down view of a square package with rounded corners. Key dimensions include:

- Overall width: .236
- Overall height: .255
- Central square area: .148 by .105
- Central square area: .085 by .015
- 64 mil by 4 mil pad
- 11x .020 pin holes for ground
- Coplanar waveguide, .035 trace width, .008 gap, 5 plating (see note 1)
- See note 3
- Pin 1
- .003, typical


1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

The diagram shows a black rectangular label with white text. The text is arranged in four lines: a small white circle, 'MCL', 'WP4P', and 'XXXX'. An arrow points from the word 'Index' to the white circle. Two other arrows point from the text 'Black Body' and 'Model Family Designation' to the 'MCL' and 'XXXX' parts of the label, respectively.

Marking may contain other features or characters for internal lot control.

OUTLINE DRAWING

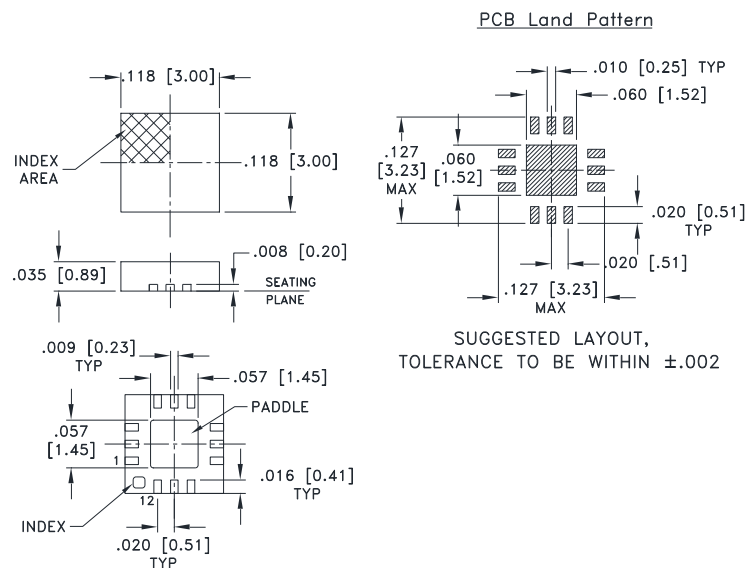

Weight: .02 Grams
Dimensions are in inches [mm]. Tolerances in inches: 2 Pl. $\pm .01$; 3 Pl. $\pm .004$ inches

TAPE & REEL INFORMATION: F66



Mini-Circuits

MMIC SURFACE MOUNT

Power Splitter/Combiner




WP4P1+

4 Way-0° 50Ω 1525 to 2375 MHz

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Total Loss ¹ (dB)				Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1525.00	7.31	7.46	7.40	7.27	0.19	26.30	22.05	25.33	1.42	1.91	1.59	1.53	1.54	1.55
1550.00	7.20	7.35	7.29	7.17	0.18	27.70	22.89	26.57	1.30	1.80	1.58	1.52	1.52	1.53
1600.00	7.02	7.16	7.10	6.99	0.17	31.20	24.73	29.51	1.08	1.61	1.55	1.48	1.49	1.50
1650.00	6.89	7.01	6.95	6.85	0.16	35.65	26.69	32.87	0.86	1.45	1.52	1.45	1.46	1.47
1700.00	6.79	6.90	6.85	6.75	0.15	37.18	28.46	34.62	0.65	1.33	1.49	1.42	1.44	1.45
1750.00	6.72	6.82	6.76	6.68	0.14	33.34	29.30	32.61	0.45	1.23	1.47	1.40	1.41	1.43
1800.00	6.68	6.76	6.71	6.63	0.13	29.87	28.76	29.73	0.25	1.17	1.45	1.37	1.39	1.41
1850.00	6.65	6.72	6.67	6.61	0.12	27.37	27.37	27.37	0.22	1.17	1.44	1.35	1.37	1.40
1900.00	6.65	6.70	6.65	6.59	0.11	25.51	25.82	25.54	0.40	1.21	1.43	1.34	1.35	1.38
1950.00	6.66	6.69	6.65	6.60	0.09	24.07	24.40	24.10	0.57	1.26	1.42	1.32	1.33	1.38
2000.00	6.67	6.69	6.65	6.61	0.08	22.91	23.17	22.93	0.71	1.33	1.41	1.31	1.32	1.37
2100.00	6.73	6.73	6.68	6.67	0.07	21.18	21.21	21.19	1.04	1.48	1.41	1.29	1.30	1.36
2200.00	6.81	6.78	6.74	6.74	0.07	19.96	19.77	19.95	1.31	1.63	1.41	1.28	1.30	1.37
2300.00	6.90	6.85	6.81	6.84	0.09	19.07	18.66	19.05	1.57	1.78	1.42	1.28	1.29	1.37
2375.00	6.97	6.92	6.87	6.91	0.10	18.55	18.00	18.53	1.80	1.89	1.42	1.28	1.29	1.38

1. Total Loss = Insertion Loss + 6 dB splitter loss.

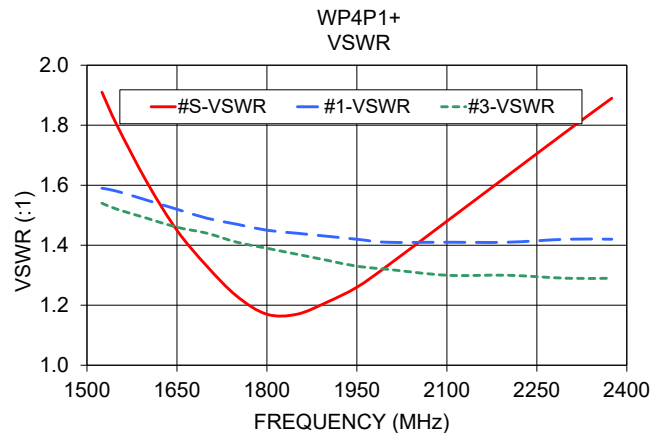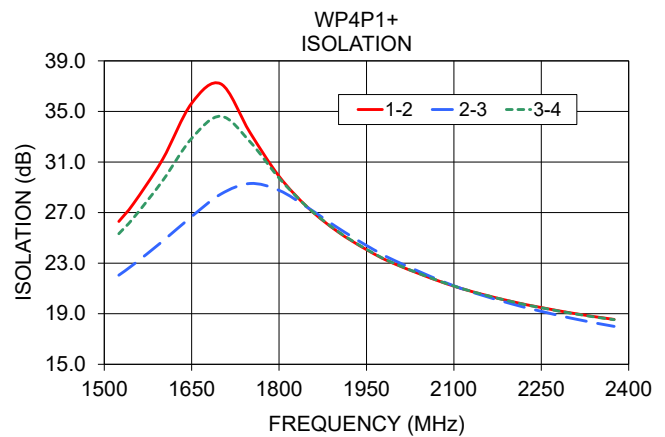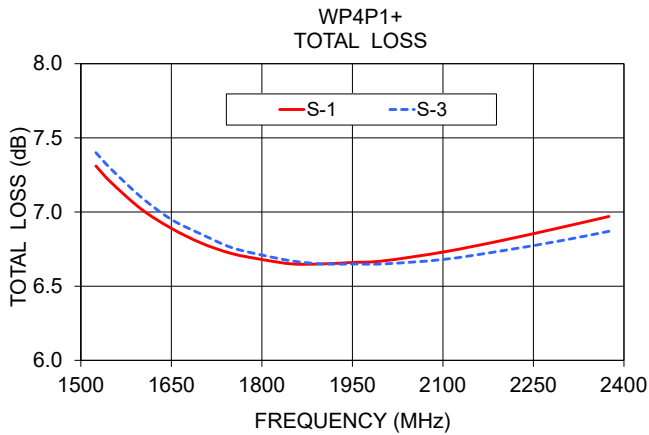

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

