

Coaxial

Voltage Controlled Oscillator

ZX95-3050+

Linear Tuning 2850 to 3050 MHz

Features

- linear tuning characteristics
- low pulling
- protected by US patent 6,790,049

Applications

- r & d
- lab
- instrumentation
- wireless communications
- high capacity radio



CASE STYLE: GB956

| Connectors | Model |
|------------|--------------|
| SMA | ZX95-3050-S+ |

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | |
|------------|-------------|------|--------------------|---|-----|------|------|--------|-------------------|---------------------|---------------|---------------------------------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|------|
| | Min. | Max. | | Typ. | 1 | 10 | 100 | 1000 | VOLTAGE RANGE (V) | SENSITIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | | Typ. | Typ. | | | Max. | Typ. |
| ZX95-3050+ | 2850 | 3050 | +6 | -73 | -99 | -120 | -141 | 0.5 | 12 | 35-42 | 30 | 20 | -90 | -21 | -12 | 1 | 3 | 5 | 44 |


Maximum Ratings

| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 7V |
| Absolute Max. Tuning Voltage (Vtune) | 14V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.

! NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note [AN-40-10](#).

Outline Drawing

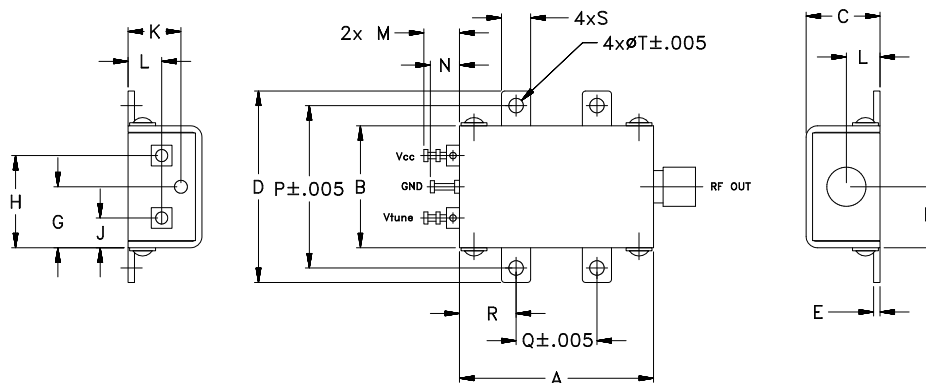

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com







REV. A
M152326
EDR-8116
ZX95-3050+
RAV
150923
Page 1 of 2

Performance Data & Curves*

ZX95-3050+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 2950 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|-------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 35.65 | 2739.7 | 2726.3 | 2717.2 | 5.84 | 5.60 | 5.38 | 36.12 | -22.8 | -33.3 | -47.1 | 3.34 | 0.90 | -74.4 | -98.8 | -120.3 | -140.7 | 1.0 | -73.87 |
| 0.50 | 34.38 | 2757.4 | 2744.1 | 2735.5 | 5.80 | 5.74 | 5.38 | 36.13 | -22.8 | -32.6 | -45.6 | 3.52 | 1.85 | -73.2 | -99.4 | -120.7 | -141.2 | 2.0 | -82.14 |
| 1.00 | 33.90 | 2774.5 | 2761.3 | 2752.5 | 5.72 | 5.73 | 5.46 | 36.17 | -23.4 | -33.7 | -44.0 | 3.49 | 2.06 | -72.4 | -99.6 | -120.6 | -140.6 | 3.5 | -87.82 |
| 1.50 | 34.39 | 2791.4 | 2778.3 | 2769.4 | 5.80 | 5.66 | 5.46 | 36.24 | -23.1 | -35.6 | -43.5 | 3.48 | 1.31 | -73.3 | -99.1 | -120.6 | -140.8 | 6.0 | -93.66 |
| 2.00 | 35.61 | 2808.6 | 2795.5 | 2786.8 | 5.82 | 5.67 | 5.34 | 36.34 | -22.1 | -34.6 | -42.4 | 3.33 | 0.32 | -72.4 | -99.5 | -120.7 | -141.3 | 8.5 | -96.73 |
| 2.50 | 39.45 | 2827.4 | 2813.3 | 2804.4 | 5.79 | 5.71 | 5.41 | 36.36 | -21.9 | -33.9 | -42.3 | 3.44 | 1.37 | -72.4 | -99.6 | -120.7 | -140.7 | 10.0 | -98.46 |
| 3.00 | 40.05 | 2847.2 | 2833.0 | 2823.5 | 5.82 | 5.66 | 5.41 | 36.41 | -22.1 | -35.7 | -42.6 | 3.40 | 1.82 | -73.7 | -98.8 | -120.7 | -141.2 | 20.8 | -106.70 |
| 4.00 | 41.58 | 2888.0 | 2873.3 | 2863.8 | 5.91 | 5.79 | 5.45 | 36.59 | -21.2 | -35.1 | -42.6 | 3.18 | 0.50 | -73.7 | -99.0 | -120.7 | -140.9 | 35.5 | -110.73 |
| 5.00 | 40.22 | 2929.7 | 2914.7 | 2905.0 | 6.01 | 5.81 | 5.45 | 36.76 | -21.0 | -36.5 | -43.3 | 3.02 | 1.75 | -72.3 | -98.9 | -120.9 | -141.4 | 60.7 | -116.39 |
| 6.00 | 38.38 | 2970.1 | 2954.8 | 2944.7 | 6.12 | 5.81 | 5.56 | 36.93 | -20.6 | -35.6 | -47.3 | 2.95 | 0.39 | -74.0 | -98.6 | -120.6 | -141.0 | 86.7 | -119.61 |
| 7.00 | 37.52 | 3009.0 | 2992.9 | 2982.8 | 6.03 | 5.94 | 5.66 | 37.12 | -20.1 | -35.9 | -49.4 | 2.86 | 1.60 | -73.1 | -98.6 | -120.4 | -140.6 | 100.0 | -120.60 |
| 8.00 | 35.54 | 3046.1 | 3029.6 | 3019.5 | 6.30 | 6.00 | 5.56 | 37.33 | -20.2 | -38.3 | -47.0 | 2.79 | 0.93 | -73.4 | -97.9 | -120.2 | -140.4 | 148.1 | -124.29 |
| 8.50 | 35.12 | 3064.3 | 3047.4 | 3036.9 | 6.30 | 6.09 | 5.75 | 37.42 | -20.1 | -40.5 | -45.3 | 2.81 | 0.69 | -72.1 | -97.4 | -120.2 | -139.8 | 177.0 | -125.77 |
| 9.00 | 34.31 | 3081.9 | 3064.9 | 3054.3 | 6.36 | 6.11 | 5.83 | 37.52 | -19.9 | -39.2 | -43.8 | 2.81 | 1.71 | -72.0 | -96.9 | -119.5 | -139.8 | 211.6 | -127.19 |
| 9.50 | 33.65 | 3099.4 | 3082.1 | 3071.4 | 6.41 | 6.11 | 5.82 | 37.63 | -19.5 | -38.1 | -43.4 | 2.80 | 1.96 | -71.8 | -96.9 | -119.1 | -139.6 | 302.4 | -130.60 |
| 10.00 | 33.24 | 3116.7 | 3098.9 | 3088.1 | 6.45 | 6.19 | 5.85 | 37.73 | -20.0 | -38.7 | -42.8 | 2.79 | 1.76 | -71.3 | -96.9 | -118.8 | -138.9 | 361.5 | -132.18 |
| 10.50 | 32.53 | 3133.5 | 3115.5 | 3104.5 | 6.46 | 6.24 | 5.92 | 37.84 | -19.8 | -37.8 | -44.6 | 2.76 | 0.63 | -69.4 | -96.5 | -118.5 | -138.9 | 507.5 | -134.42 |
| 11.00 | 31.75 | 3149.9 | 3131.8 | 3120.7 | 6.55 | 6.25 | 5.96 | 37.95 | -19.4 | -36.6 | -43.5 | 2.66 | 1.07 | -68.7 | -95.8 | -117.8 | -138.3 | 606.7 | -136.46 |
| 11.50 | 31.56 | 3166.2 | 3147.7 | 3136.5 | 6.55 | 6.30 | 5.98 | 38.05 | -20.0 | -36.5 | -44.3 | 2.55 | 1.87 | -69.9 | -95.9 | -117.9 | -138.5 | 851.6 | -139.49 |
| 12.00 | 31.16 | 3182.3 | 3163.4 | 3152.1 | 6.57 | 6.33 | 6.01 | 38.13 | -20.6 | -37.1 | -44.6 | 2.40 | 2.24 | -68.3 | -95.3 | -117.5 | -137.6 | 1000.0 | -140.85 |

*at 25°C unless mentioned otherwise

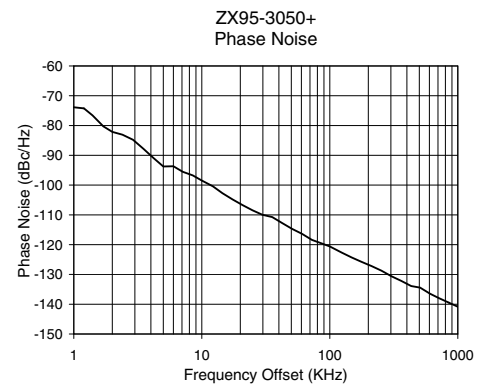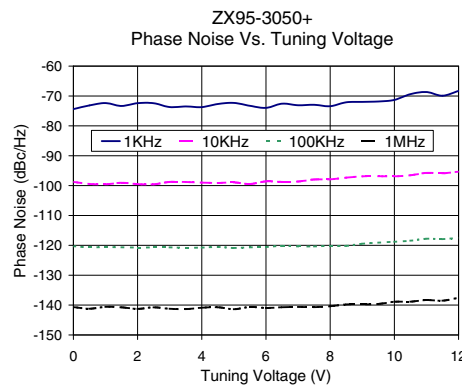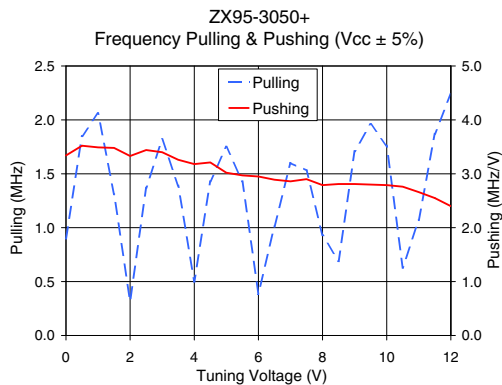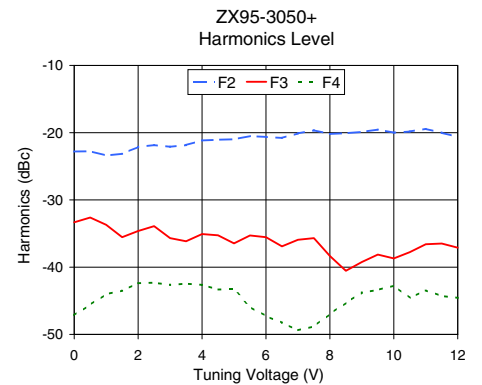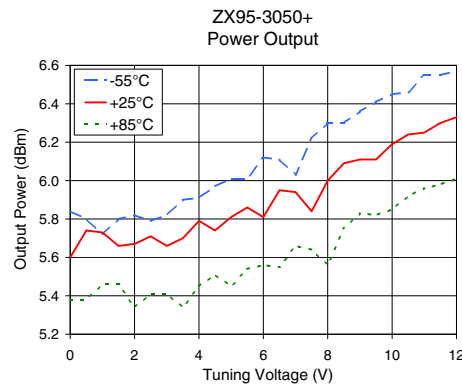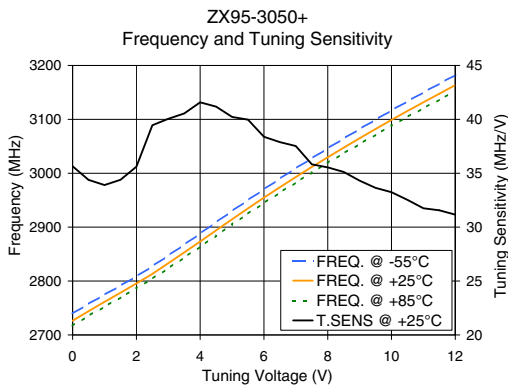

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

