

Coaxial High Power Combiner

ZA2CS-600-10W

2 Way-0° 50Ω 100 to 600 MHz


Maximum Ratings

Operating Temperature	-55°C to 90°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

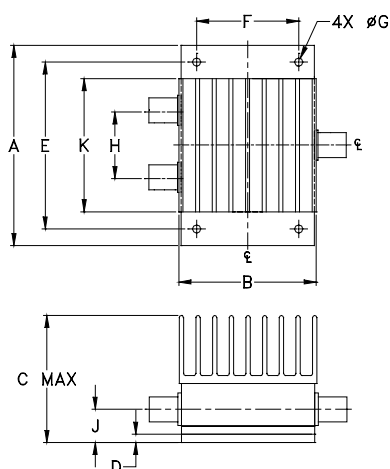

Outline Dimensions (inch/mm)


A	B	C	D	E	F
3.00	2.06	1.92	.100	2.500	1.525
76.20	52.32	48.77	2.54	63.50	38.74
G	H	J	K		wt
.125	1.000	.50	2.00		grams
3.18	25.40	12.70	50.80		330

Features

- high power, up to 10W input power
- wideband, 100 to 600 MHz
- low insertion loss, 0.4 dB typ.
- high isolation, 27 dB typ.

Applications

- VHF/UHF
- communication receivers & transmitters



Generic photo used for illustration purposes only

BNC version shown

CASE STYLE: AW254

Connectors	Model
BNC	ZA2CS-600-10W
N-TYPE	ZA2CS-600-10W-N
SMA	ZA2CS-600-10W-S

High Power Combiner Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		POWER INPUT ¹ (W)	
f_L - f_U	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	as combiner ² Max.	as splitter Max.
100-600	27	15	0.4	1.3	0.4	3.0	0.15	0.5	10	10




1. Over -55°C to +55°C. Derate linearly to 20% of rating at 90°C

2. As a combiner of non-coherent signals, max. power per port is power rating divided by number of ports.

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
100.00	3.26	3.24	0.01	24.75	0.16	1.22	1.36	1.34
122.50	3.24	3.22	0.02	27.48	0.09	1.22	1.28	1.27
145.00	3.20	3.19	0.01	29.39	0.21	1.18	1.23	1.21
178.75	3.23	3.21	0.02	30.09	0.06	1.20	1.23	1.21
220.00	3.22	3.19	0.03	28.98	0.23	1.25	1.17	1.15
280.00	3.29	3.26	0.03	27.29	0.27	1.23	1.14	1.10
320.00	3.29	3.25	0.04	26.82	0.24	1.23	1.10	1.07
350.00	3.36	3.33	0.03	27.00	0.26	1.18	1.10	1.06
380.00	3.35	3.31	0.04	27.39	0.47	1.17	1.09	1.05
420.00	3.37	3.31	0.05	27.90	0.36	1.16	1.07	1.03
480.00	3.38	3.31	0.07	27.96	0.48	1.13	1.06	1.02
520.00	3.42	3.35	0.07	26.97	0.60	1.10	1.06	1.02
550.00	3.41	3.33	0.08	25.72	0.64	1.11	1.05	1.03
580.00	3.50	3.40	0.10	24.34	0.78	1.12	1.06	1.05
600.00	3.50	3.39	0.11	23.37	0.66	1.12	1.07	1.06

1. Total Loss = Insertion Loss + 3dB splitter loss.

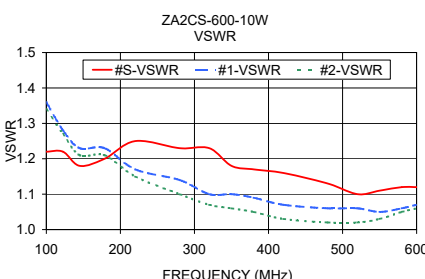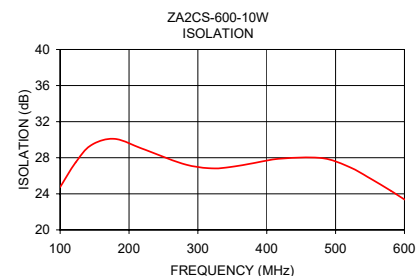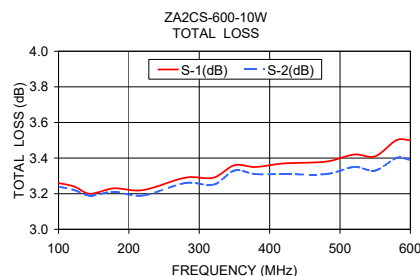

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M151107
ZA2CS-600-10W
HY/TD/CP
200512
Page 1 of 1

2 Way-0° Power Splitter/Combiner

ZA2CS-600-10W

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB)	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
100.0	3.26	3.24	0.01	24.75	0.16	100.0	1.22	1.36	1.34
111.3	3.25	3.23	0.02	26.19	0.13	111.3	1.23	1.32	1.31
122.5	3.24	3.22	0.02	27.48	0.09	122.5	1.22	1.28	1.27
133.8	3.22	3.21	0.01	28.55	0.17	133.8	1.20	1.25	1.23
145.0	3.20	3.19	0.01	29.39	0.21	145.0	1.18	1.23	1.21
156.3	3.17	3.16	0.01	29.88	0.14	156.3	1.16	1.23	1.21
167.5	3.16	3.15	0.01	30.05	0.15	167.5	1.17	1.23	1.21
178.8	3.23	3.21	0.02	30.09	0.06	178.8	1.20	1.23	1.21
190.0	3.27	3.25	0.02	29.97	0.18	190.0	1.23	1.21	1.18
200.0	3.26	3.24	0.02	29.68	0.27	200.0	1.26	1.20	1.17
220.0	3.22	3.19	0.03	28.98	0.23	220.0	1.25	1.17	1.15
240.0	3.21	3.18	0.02	28.25	0.23	240.0	1.19	1.16	1.13
260.0	3.24	3.21	0.03	27.63	0.23	260.0	1.19	1.15	1.12
280.0	3.29	3.26	0.03	27.29	0.27	280.0	1.23	1.14	1.10
300.0	3.28	3.25	0.03	26.96	0.29	300.0	1.25	1.13	1.10
310.0	3.26	3.23	0.03	26.85	0.24	310.0	1.24	1.11	1.08
320.0	3.29	3.25	0.04	26.82	0.24	320.0	1.23	1.10	1.07
330.0	3.30	3.27	0.04	26.85	0.16	330.0	1.21	1.10	1.06
340.0	3.33	3.29	0.03	26.89	0.30	340.0	1.19	1.10	1.06
350.0	3.36	3.33	0.03	27.00	0.26	350.0	1.18	1.10	1.06
360.0	3.37	3.33	0.04	27.09	0.40	360.0	1.17	1.10	1.06
370.0	3.37	3.33	0.03	27.25	0.47	370.0	1.17	1.10	1.06
380.0	3.35	3.31	0.04	27.39	0.47	380.0	1.17	1.09	1.05
390.0	3.34	3.30	0.05	27.54	0.36	390.0	1.18	1.08	1.04
400.0	3.34	3.29	0.05	27.67	0.45	400.0	1.18	1.08	1.04
420.0	3.37	3.31	0.05	27.90	0.36	420.0	1.16	1.07	1.03
440.0	3.39	3.34	0.05	28.11	0.48	440.0	1.13	1.07	1.02
460.0	3.37	3.31	0.06	28.08	0.47	460.0	1.13	1.06	1.02
480.0	3.38	3.31	0.07	27.96	0.48	480.0	1.13	1.06	1.02
500.0	3.39	3.32	0.07	27.58	0.62	500.0	1.12	1.06	1.02
510.0	3.42	3.34	0.07	27.29	0.65	510.0	1.11	1.06	1.02
520.0	3.42	3.35	0.07	26.97	0.60	520.0	1.10	1.06	1.02
530.0	3.44	3.35	0.09	26.60	0.63	530.0	1.10	1.05	1.02
540.0	3.43	3.34	0.09	26.14	0.64	540.0	1.10	1.05	1.02
550.0	3.41	3.33	0.08	25.72	0.64	550.0	1.11	1.05	1.03
560.0	3.41	3.33	0.08	25.28	0.69	560.0	1.12	1.05	1.03
570.0	3.45	3.36	0.09	24.81	0.72	570.0	1.12	1.05	1.04
580.0	3.50	3.40	0.10	24.34	0.78	580.0	1.12	1.06	1.05
590.0	3.50	3.40	0.11	23.86	0.70	590.0	1.12	1.07	1.06
600.0	3.50	3.39	0.11	23.37	0.66	600.0	1.12	1.07	1.06

¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

REV. X2

ZA2CS-600-10W

100627

Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661








The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



2 Way-0° Power Splitter/Combiner

ZA2CS-600-10W

Typical Performance Curves

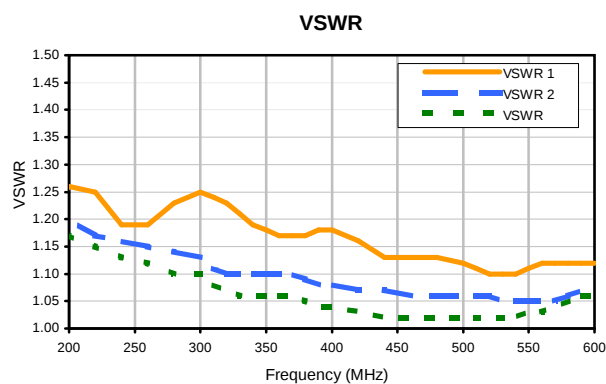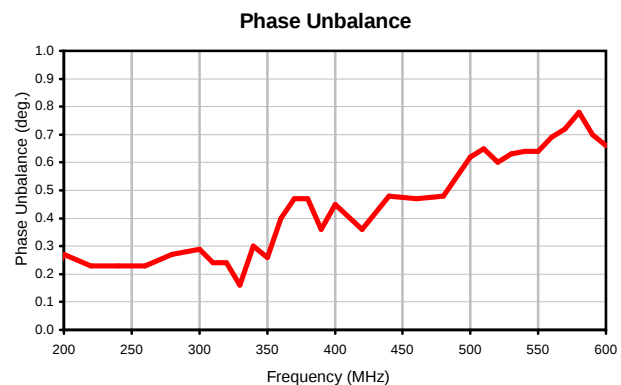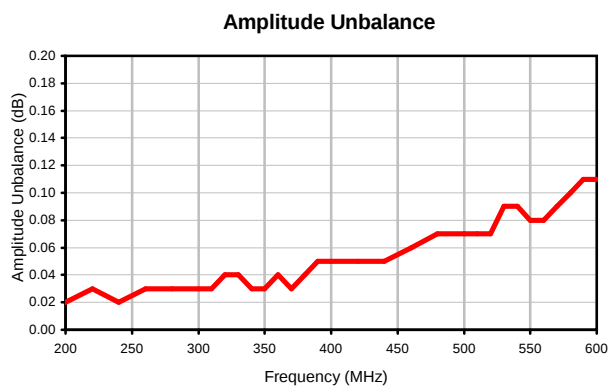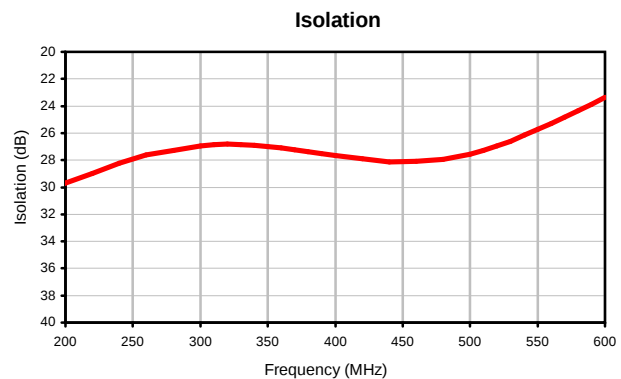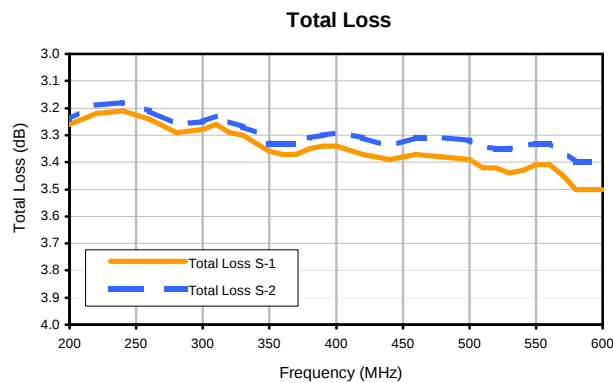

REV. X2
ZA2CS-600-10W
100627
Page 1 of 1



The Design Engineers Search Engine finds the model you need, instantly. For detailed performance specs & shopping online see


Mini-Circuits®

RF/MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Outline Dimensions

AW254

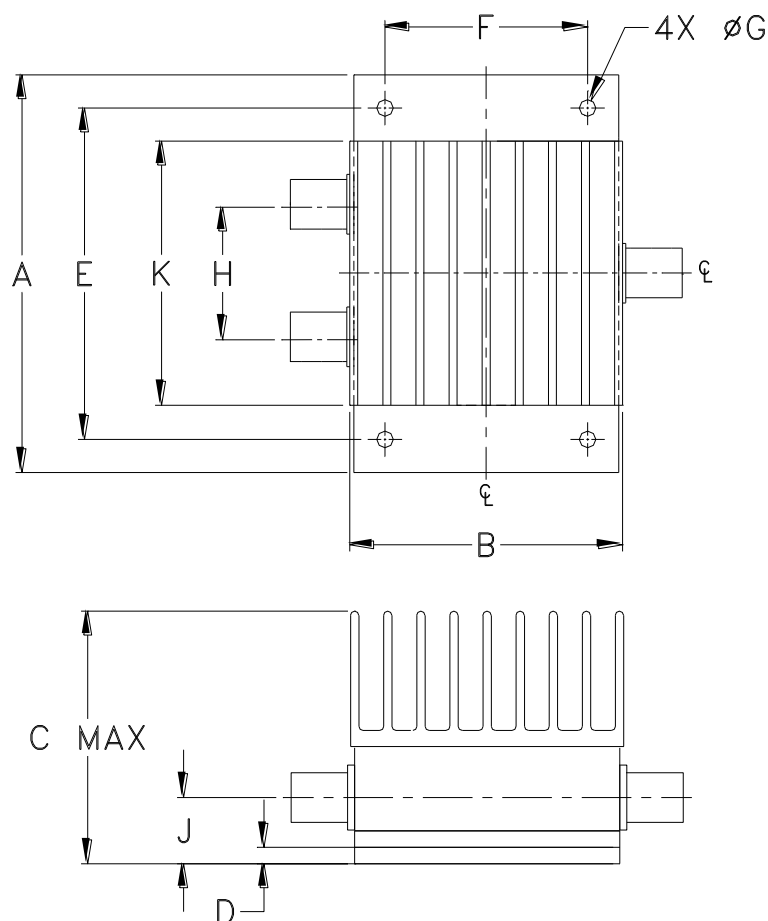

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
AW254	3.00 (76.20)	2.06 (52.32)	1.92 (48.77)	.100 (2.54)	2.500 (63.50)	1.525 (38.74)	.125 (3.18)	1.000 (25.40)	.50 (12.70)	2.00 (50.80)	330

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case Finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Heat sink finish: Black anodize.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 90° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I