Surface Mount

Frequency Mixer

ADE-18W+

Level 7 (LO Power +7 dBm) 1750 to 3500 MHz



Generic photo used for illustration purposes only

CASE STYLE: CD542

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	4
RF	6
IF	3
GROUND	1,2,5


Features

- low conversion loss, 5.4 dB typ.
- good isolation, 33 dB typ.
- low profile package
- aqueous washable
- protected by U.S. Patent 6,133,525


Applications

- PCS
- MMDS
- ISM

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

Demo Board MCL P/N: TB-02
Suggested PCB Layout (PL-051)

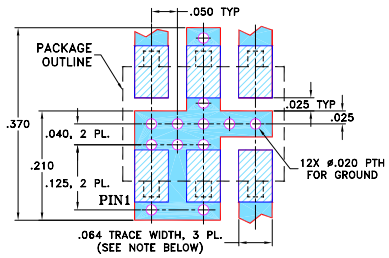

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF			Total Range					
f_L-f_U		$\overline{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
1750-3500	DC-700	5.4	0.30	8.9	33	20	12	7	11

1 dB COMP.: +1 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
1750.00	1780.00	5.42	31.90	20.60	2.84	3.01
1784.78	1814.78	5.43	32.30	20.10	2.58	2.88
1932.61	1962.61	4.79	33.10	16.00	1.77	2.92
2080.44	2110.44	4.68	33.50	14.30	1.75	3.01
2228.26	2258.26	4.92	33.80	13.80	2.16	3.06
2376.09	2406.09	5.19	34.60	14.20	2.46	2.96
2523.91	2553.91	5.23	32.90	14.10	2.49	2.76
2671.74	2701.74	4.79	30.80	13.70	2.52	2.55
2819.57	2849.57	4.97	28.40	15.20	2.49	2.96
2967.39	2997.39	5.53	27.50	16.20	2.40	3.50
3000.00	3030.00	5.69	27.70	16.30	2.40	3.06
3115.21	3145.22	6.58	27.50	17.30	2.84	3.06
3263.04	3293.04	7.28	25.70	17.20	4.03	3.32
3410.87	3440.87	7.07	24.90	17.20	5.49	3.79
3470.00	3500.00	7.01	25.10	17.30	6.26	3.95
3500.00	3530.00	6.96	25.00	16.80	6.26	4.42
3558.70	3588.70	6.93	25.00	16.60	5.85	4.42
3706.52	3736.52	7.74	26.40	15.70	7.00	5.33

Electrical Schematic

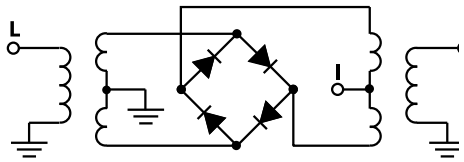


Notes


A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®
www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


ADE-18W+
CONVERSION LOSS
at IF Freq of 30 MHz

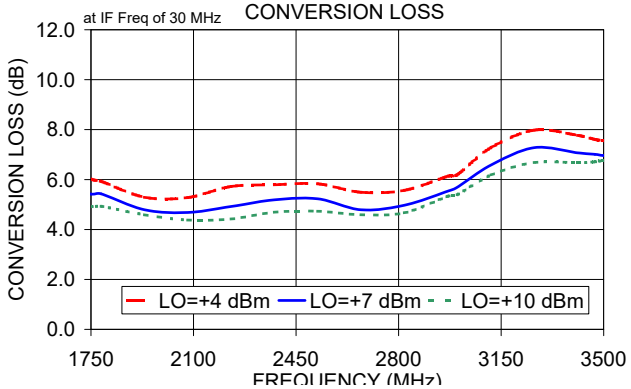


ADE-18W+
L-R ISOLATION

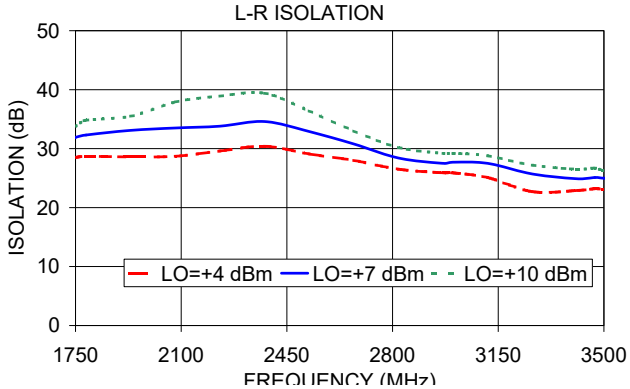


ADE-18W+
L-I ISOLATION

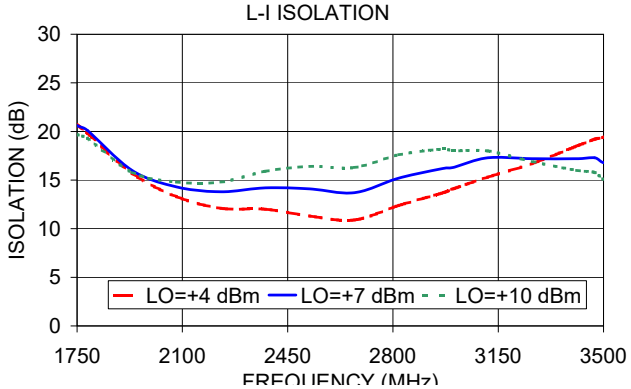


ADE-18W+
RF VSWR

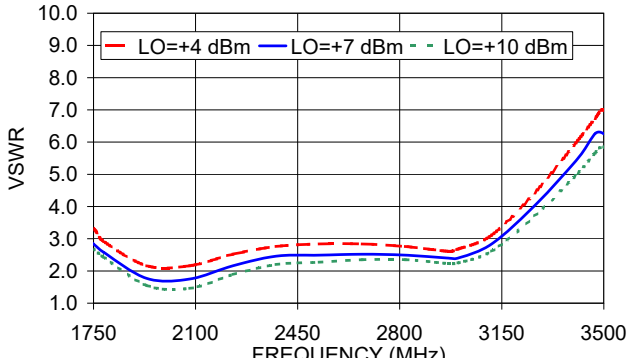

ADE-18W+
LO VSWR

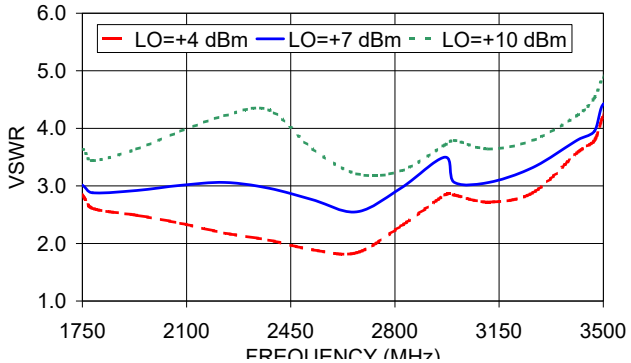

ADE-18W+
IF VSWR

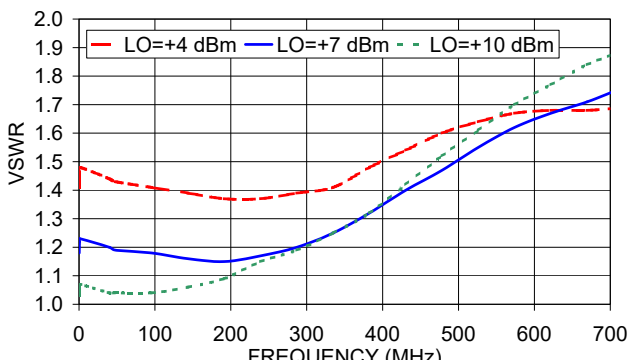

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Frequency Mixer ADE-18W+

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB) @LO (dBm)		
		+4	+7	+10
1200.1	1230.1	15.12	9.84	8.41
1280.4	1310.4	12.99	9.23	7.97
1360.6	1390.6	11.08	8.47	7.54
1440.9	1470.9	9.54	7.52	6.81
1521.2	1551.2	8.58	7.07	6.46
1601.4	1631.4	7.84	6.73	6.17
1681.7	1711.7	7.34	6.41	5.90
1762.0	1792.0	6.94	6.26	5.81
1842.2	1872.2	6.66	6.06	5.69
1922.5	1952.5	6.40	5.85	5.56
2002.8	2032.8	6.29	5.71	5.40
2083.1	2113.1	6.33	5.60	5.27
2163.3	2193.3	6.52	5.68	5.20
2243.6	2273.6	6.62	5.72	5.21
2323.9	2353.9	6.58	5.75	5.25
2404.1	2434.1	6.48	5.62	5.11
2484.4	2514.4	6.32	5.33	4.84
2564.7	2594.7	6.18	5.34	4.88
2644.9	2674.9	6.15	5.39	4.97
2725.2	2755.2	6.30	5.55	5.10
2805.5	2835.5	6.38	5.71	5.28
2885.7	2915.7	6.40	5.83	5.45
2966.0	2996.0	6.50	5.93	5.59
3046.3	3076.3	6.62	6.06	5.76
3126.5	3156.5	6.87	6.31	6.00
3206.8	3236.8	7.15	6.58	6.25
3287.1	3317.1	7.44	6.86	6.52
3347.3	3377.3	7.62	7.05	6.70
3427.5	3457.5	7.67	7.15	6.86
3487.8	3517.8	7.57	7.08	6.86
3568.0	3598.0	7.91	7.12	6.76
3628.2	3658.2	8.54	7.53	6.98
3708.5	3738.5	8.90	7.96	7.40
3768.7	3798.7	9.07	8.12	7.55
3849.0	3879.0	9.46	8.35	7.77
3909.2	3939.2	9.89	8.56	7.91
3989.4	4019.4	10.39	8.61	8.00
4049.6	4079.6	11.08	8.70	8.08
4129.9	4159.9	13.43	9.09	8.17
4190.1	4220.1	16.28	9.85	8.29

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm) @LO (dBm)		
		+4	+7	+10
1200.1	1230.1	2.81	13.86	15.97
1280.4	1310.4	4.53	11.61	13.99
1360.6	1390.6	6.69	10.87	11.06
1440.9	1470.9	9.48	10.79	12.97
1521.2	1551.2	11.72	12.21	13.10
1601.4	1631.4	12.45	11.14	13.03
1681.7	1711.7	13.29	10.96	11.52
1762.0	1792.0	13.06	9.59	9.82
1842.2	1872.2	12.01	10.10	9.45
1922.5	1952.5	10.54	9.43	9.34
2002.8	2032.8	9.67	8.75	8.74
2083.1	2113.1	8.42	9.19	10.06
2163.3	2193.3	9.84	9.30	9.20
2243.6	2273.6	9.21	9.50	9.54
2323.9	2353.9	8.76	8.85	9.03
2404.1	2434.1	8.87	8.73	8.71
2484.4	2514.4	9.63	12.20	14.14
2564.7	2594.7	8.06	10.00	12.53
2644.9	2674.9	8.11	9.47	11.86
2725.2	2755.2	8.69	9.06	10.86
2805.5	2835.5	9.44	9.08	10.82
2885.7	2915.7	12.62	10.21	10.46
2966.0	2996.0	12.24	13.23	11.62
3046.3	3076.3	12.17	14.69	14.48
3126.5	3156.5	12.89	13.53	17.92
3206.8	3236.8	15.00	17.26	19.69
3287.1	3317.1	16.16	17.88	21.36
3347.3	3377.3	15.03	15.33	17.48
3427.5	3457.5	13.57	15.86	17.66
3487.8	3517.8	12.20	15.63	19.06
3568.0	3598.0	15.12	15.71	15.27
3628.2	3658.2	15.04	22.98	17.81
3708.5	3738.5	12.68	16.63	17.68
3768.7	3798.7	12.37	16.70	17.79
3849.0	3879.0	10.26	13.56	17.34
3909.2	3939.2	9.19	13.14	16.23
3989.4	4019.4	8.03	12.18	16.65
4049.6	4079.6	8.67	11.92	16.04
4129.9	4159.9	11.14	12.32	17.29
4190.1	4220.1	2.94	13.29	17.46

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB) @LO (dBm)		
		+4	+7	+10
1200.1	1230.1	-2.39	-0.08	0.03
1280.4	1310.4	-1.53	-0.16	0.01
1360.6	1390.6	-0.59	0.04	0.07
1440.9	1470.9	0.09	0.41	0.31
1521.2	1551.2	0.45	0.54	0.38
1601.4	1631.4	0.68	0.62	0.48
1681.7	1711.7	0.88	0.70	0.58
1762.0	1792.0	1.18	0.84	0.70
1842.2	1872.2	1.48	1.08	0.84
1922.5	1952.5	1.65	1.14	0.95
2002.8	2032.8	1.60	1.12	0.94
2083.1	2113.1	1.39	1.01	0.83
2163.3	2193.3	1.05	0.71	0.59
2243.6	2273.6	0.92	0.57	0.52
2323.9	2353.9	0.85	0.51	0.46
2404.1	2434.1	0.83	0.57	0.47
2484.4	2514.4	1.00	0.74	0.56
2564.7	2594.7	0.98	0.55	0.40
2644.9	2674.9	0.92	0.48	0.35
2725.2	2755.2	0.81	0.41	0.29
2805.5	2835.5	0.72	0.34	0.26
2885.7	2915.7	0.75	0.34	0.23
2966.0	2996.0	0.76	0.36	0.23
3046.3	3076.3	0.69	0.37	0.24
3126.5	3156.5	0.68	0.34	0.23
3206.8	3236.8	0.60	0.27	0.17
3287.1	3317.1	0.52	0.22	0.12
3347.3	3377.3	0.51	0.22	0.12
3427.5	3457.5	0.57	0.24	0.13
3487.8	3517.8	0.65	0.26	0.14
3568.0	3598.0	0.50	0.28	0.20
3628.2	3658.2	0.38	0.20	0.18
3708.5	3738.5	0.49	0.20	0.13
3768.7	3798.7	0.52	0.21	0.14
3849.0	3879.0	0.67	0.23	0.16
3909.2	3939.2	0.92	0.32	0.16
3989.4	4019.4	0.96	0.36	0.16
4049.6	4079.6	0.71	0.45	0.13
4129.9	4159.9	-0.52	0.52	0.16
4190.1	4220.1	-2.45	0.41	0.20

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2625.1MHz (dB)
		@LO (dBm)
		+7
700.0	1925.1	5.45
659.4	1965.7	5.53
618.8	2006.3	5.63
578.2	2046.9	5.81
537.6	2087.5	5.86
497.1	2128.0	5.85
456.5	2168.6	5.88
415.9	2209.2	5.80
375.3	2249.8	5.75
334.7	2290.4	5.70
294.1	2331.0	5.66
253.5	2371.6	5.73
212.9	2412.2	5.67
172.4	2452.7	5.66
131.8	2493.3	5.56
91.2	2533.9	5.49
50.6	2574.5	5.41
10.0	2615.1	5.32
30.3	2655.4	5.38
70.9	2696.0	5.35
111.5	2736.6	5.39
152.1	2777.2	5.46
192.6	2817.7	5.49
212.9	2838.0	5.53
253.5	2878.6	5.58
273.8	2898.9	5.56
314.4	2939.5	5.52
334.7	2959.8	5.50
375.3	3000.4	5.40
395.6	3020.7	5.35
436.2	3061.3	5.31
456.5	3081.6	5.28
497.1	3122.2	5.26
517.4	3142.5	5.26
557.9	3183.0	5.28
578.2	3203.3	5.31
618.8	3243.9	5.38
639.1	3264.2	5.43
679.7	3304.8	5.47
700.0	3325.1	5.44

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1750.1MHz (dB)
		@LO (dBm)
		+7
10.0	1760.1	6.14
27.7	1777.8	6.26
45.4	1795.5	6.31
63.1	1813.2	6.36
80.8	1830.9	6.37
98.5	1848.6	6.43
116.2	1866.3	6.49
133.8	1883.9	6.55
151.5	1901.6	6.59
169.2	1919.3	6.65
186.9	1937.0	6.68
204.6	1954.7	6.70
222.3	1972.4	6.73
240.0	1990.1	6.74
257.7	2007.8	6.76
275.4	2025.5	6.75
293.1	2043.2	6.73
310.8	2060.9	6.73
328.5	2078.6	6.73
346.2	2096.3	6.70
363.8	2113.9	6.68
381.5	2131.6	6.66
399.2	2149.3	6.68
416.9	2167.0	6.69
434.6	2184.7	6.69
452.3	2202.4	6.68
470.0	2220.1	6.66
487.7	2237.8	6.65
505.4	2255.5	6.70
523.1	2273.2	6.74
540.8	2290.9	6.76
558.5	2308.6	6.76
576.2	2326.3	6.79
593.8	2343.9	6.82
611.5	2361.6	6.83
629.2	2379.3	6.84
646.9	2397.0	6.78
664.6	2414.7	6.76
682.3	2432.4	6.76
700.0	2450.1	6.76

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=3500.1MHz (dB)
		@LO (dBm)
		+7
700.0	2800.1	7.97
682.3	2817.8	7.99
664.6	2835.5	8.00
646.9	2853.2	8.03
629.2	2870.9	8.02
611.5	2888.6	8.03
593.8	2906.3	8.03
576.2	2923.9	8.05
558.5	2941.6	8.09
540.8	2959.3	8.11
523.1	2977.0	8.11
505.4	2994.7	8.13
487.7	3012.4	8.14
470.0	3030.1	8.17
452.3	3047.8	8.18
434.6	3065.5	8.17
416.9	3083.2	8.13
399.2	3100.9	8.10
381.5	3118.6	8.09
363.8	3136.3	8.09
346.2	3153.9	8.04
328.5	3171.6	8.01
310.8	3189.3	7.96
293.1	3207.0	7.92
275.4	3224.7	7.91
257.7	3242.4	7.90
240.0	3260.1	7.85
222.3	3277.8	7.78
204.6	3295.5	7.73
186.9	3313.2	7.69
169.2	3330.9	7.67
151.5	3348.6	7.62
133.8	3366.3	7.56
116.2	3383.9	7.48
98.5	3401.6	7.43
80.8	3419.3	7.39
63.1	3437.0	7.36
45.4	3454.7	7.32
27.7	3472.4	7.30
10.0	3490.1	7.23

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB) @LO (dBm)			LO-IF ISOLATION (dB) @LO (dBm)		
	+4	+7	+10	+4	+7	+10
1200.1	25.88	24.69	24.31	18.63	21.80	24.79
1280.4	25.72	24.89	24.55	20.42	24.17	27.49
1360.6	25.76	25.28	24.91	23.22	27.83	33.25
1440.9	26.26	25.90	25.58	26.73	32.63	39.58
1521.2	26.98	26.85	26.54	28.24	29.51	29.98
1601.4	28.02	28.31	27.89	24.83	24.82	24.57
1681.7	29.32	30.15	29.77	20.52	20.96	21.03
1762.0	31.15	32.67	32.39	17.42	17.98	18.46
1842.2	33.91	36.84	35.75	15.04	15.77	16.32
1922.5	37.48	43.16	36.37	13.08	14.09	14.66
2002.8	38.18	52.52	36.75	11.62	12.89	13.75
2083.1	34.74	41.16	36.33	10.30	11.82	12.84
2163.3	31.71	35.18	33.65	9.23	10.85	12.18
2243.6	29.77	32.75	32.77	8.61	10.34	11.73
2323.9	28.23	31.24	32.58	8.07	9.97	11.57
2404.1	27.25	30.50	32.66	7.72	9.70	11.53
2484.4	26.90	30.49	33.15	7.47	9.57	11.58
2564.7	26.16	29.32	31.97	7.29	9.39	11.54
2644.9	25.99	28.84	31.44	7.39	9.52	11.74
2725.2	26.58	29.37	31.89	7.67	9.90	12.25
2805.5	27.05	29.61	31.92	7.98	10.29	12.71
2885.7	27.87	30.08	32.12	8.31	10.67	13.13
2966.0	29.32	31.17	32.73	8.73	11.15	13.64
3046.3	30.76	32.14	33.16	9.24	11.65	14.15
3126.5	32.17	32.78	33.07	9.92	12.31	14.72
3206.8	33.11	33.46	33.19	10.76	13.10	15.23
3287.1	33.04	33.39	33.16	11.58	13.78	15.60
3347.3	32.62	33.05	33.12	12.15	14.14	15.66
3427.5	32.26	32.77	32.92	13.22	14.83	15.72
3487.8	31.71	32.23	32.42	14.12	15.34	15.78
3568.0	30.60	31.33	31.88	15.27	15.87	15.84
3628.2	30.92	31.71	32.26	16.28	16.27	15.72
3708.5	31.12	32.05	32.67	17.74	16.83	15.85
3768.7	31.00	32.08	32.76	19.17	17.34	15.95
3849.0	30.49	31.83	32.62	20.98	18.06	16.09
3909.2	30.30	31.67	32.54	22.41	18.33	16.14
3989.4	29.89	31.29	32.23	23.41	18.68	16.25
4049.6	29.53	30.90	31.89	23.56	19.00	16.39
4129.9	29.07	30.14	31.16	21.93	19.07	16.54
4190.1	28.82	29.59	30.54	20.47	18.83	16.52

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB) @LO (dBm)		
		+4	+7	+10
1200.1	1230.1	14.20	13.45	13.19
1280.4	1310.4	14.42	14.09	13.92
1360.6	1390.6	14.81	14.78	14.75
1440.9	1470.9	15.43	15.49	15.34
1521.2	1551.2	16.22	16.36	16.31
1601.4	1631.4	16.94	17.37	17.40
1681.7	1711.7	17.65	18.25	18.47
1762.0	1792.0	18.22	18.71	19.13
1842.2	1872.2	18.33	18.41	18.25
1922.5	1952.5	17.63	17.01	16.39
2002.8	2032.8	17.15	16.20	15.27
2083.1	2113.1	16.59	15.46	14.66
2163.3	2193.3	16.08	15.25	14.60
2243.6	2273.6	15.19	14.63	14.22
2323.9	2353.9	14.51	14.27	14.04
2404.1	2434.1	14.01	13.95	13.85
2484.4	2514.4	13.73	13.95	14.11
2564.7	2594.7	13.79	13.92	14.17
2644.9	2674.9	14.24	14.34	14.52
2725.2	2755.2	14.72	14.88	15.08
2805.5	2835.5	15.27	15.43	15.64
2885.7	2915.7	15.90	16.14	16.38
2966.0	2996.0	16.50	16.84	17.09
3046.3	3076.3	17.02	17.40	17.70
3126.5	3156.5	17.56	18.00	18.35
3206.8	3236.8	18.17	18.54	18.91
3287.1	3317.1	18.87	19.21	19.51
3347.3	3377.3	19.37	19.77	20.08
3427.5	3457.5	20.18	20.52	20.79
3487.8	3517.8	20.80	21.10	21.38
3568.0	3598.0	21.29	21.50	21.78
3628.2	3658.2	21.65	21.94	22.23
3708.5	3738.5	22.43	22.62	22.91
3768.7	3798.7	23.05	23.23	23.54
3849.0	3879.0	23.68	23.91	24.19
3909.2	3939.2	24.21	24.44	24.69
3989.4	4019.4	24.96	25.33	25.58
4049.6	4079.6	25.51	25.92	26.21
4129.9	4159.9	26.21	26.28	26.71
4190.1	4220.1	26.96	26.69	26.79

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1) @LO (dBm)		
		+4	+7	+10
1200.1	1230.1	9.74	7.22	6.32
1280.4	1310.4	8.77	6.97	6.30
1360.6	1390.6	7.80	6.49	5.95
1440.9	1470.9	6.76	5.68	5.16
1521.2	1551.2	5.79	5.04	4.68
1601.4	1631.4	5.22	4.57	4.26
1681.7	1711.7	4.78	4.22	3.90
1762.0	1792.0	4.25	3.76	3.52
1842.2	1872.2	3.69	3.20	2.93
1922.5	1952.5	3.18	2.67	2.39
2002.8	2032.8	2.91	2.41	2.08
2083.1	2113.1	2.79	2.24	1.89
2163.3	2193.3	2.75	2.23	1.86
2243.6	2273.6	2.54	2.15	1.83
2323.9	2353.9	2.30	2.02	1.77
2404.1	2434.1	2.12	1.85	1.63
2484.4	2514.4	1.93	1.67	1.44
2564.7	2594.7	1.78	1.61	1.47
2644.9	2674.9	1.80	1.66	1.57
2725.2	2755.2	2.00	1.88	1.79
2805.5	2835.5	2.19	2.07	2.00
2885.7	2915.7	2.33	2.23	2.17
2966.0	2996.0	2.53	2.40	2.35
3046.3	3076.3	2.80	2.62	2.52
3126.5	3156.5	3.13	2.89	2.73
3206.8	3236.8	3.52	3.20	2.97
3287.1	3317.1	3.97	3.64	3.42
3347.3	3377.3	4.30	3.95	3.73
3427.5	3457.5	4.66	4.29	4.06
3487.8	3517.8	4.82	4.45	4.18
3568.0	3598.0	5.66	5.06	4.63
3628.2	3658.2	6.26	5.51	4.98
3708.5	3738.5	6.24	5.61	5.10
3768.7	3798.7	6.24	5.65	5.20
3849.0	3879.0	6.49	5.85	5.38
3909.2	3939.2	6.83	6.03	5.51
3989.4	4019.4	7.22	6.07	5.47
4049.6	4079.6	7.66	6.09	5.42
4129.9	4159.9	8.95	6.44	5.51
4190.1	4220.1	10.69	7.11	5.83

LO (MHz)	LO VSWR (:1) @LO (dBm)		
	+4	+7	+10
1200.1	11.38	6.39	5.07
1280.4	9.08	5.28	4.73
1360.6	6.89	4.60	4.56
1440.9	5.31	4.23	4.53
1521.2	4.30	3.84	4.39
1601.4	3.65	3.60	4.29
1681.7	3.25	3.50	4.29
1762.0	3.00	3.46	4.33
1842.2	2.86	3.45	4.36
1922.5	2.77	3.44	4.35
2002.8	2.67	3.38	4.27
2083.1	2.55	3.27	4.11
2163.3	2.43	3.13	3.91
2243.6	2.32	3.00	3.76
2323.9	2.25	2.92	3.70
2404.1	2.13	2.80	3.54
2484.4	2.02	2.62	3.40
2564.7	1.89	2.54	3.26
2644.9	1.92	2.53	3.29
2725.2	1.94	2.56	3.30
2805.5	2.00	2.59	3.30
2885.7	2.07	2.65	3.35
2966.0	2.12	2.67	3.33
3046.3	2.14	2.67	3.30
3126.5	2.25	2.73	3.34
3206.8	2.33	2.75	3.33
3287.1	2.38	2.76	3.29
3347.3	2.48	2.78	3.23
3427.5	2.52	2.78	3.22
3487.8	2.60	2.85	3.29
3568.0	2.81	2.96	3.40
3628.2	2.96	3.07	3.45
3708.5	3.32	3.35	3.72
3768.7	3.67	3.60	3.92
3849.0	4.34	4.01	4.24
3909.2	4.96	4.42	4.55
3989.4	5.81	4.89	4.86
4049.6	6.61	5.28	5.06
4129.9	7.50	5.79	5.30
4190.1	7.90	6.15	5.51

IF (OUT) (MHz)	IF VSWR @LO=3500.1MHz (:1) @LO (dBm)		
	+4	+7	+10
10.0	1.42	1.22	1.14
27.7	1.40	1.21	1.06
45.4	1.35	1.16	1.05
63.1	1.32	1.15	1.05
80.8	1.33	1.14	1.05
98.5	1.35	1.15	1.06
116.2	1.37	1.17	1.09
133.8	1.38	1.19	1.11
151.5	1.38	1.18	1.12
169.2	1.38	1.18	1.13
186.9	1.39	1.20	1.15
204.6	1.41	1.21	1.16
222.3	1.42	1.23	1.19
240.0	1.43	1.25	1.21
257.7	1.44	1.26	1.23
275.4	1.45	1.27	1.24
293.1	1.46	1.29	1.27
310.8	1.47	1.31	1.30
328.5	1.47	1.32	1.32
346.2	1.47	1.33	1.34
363.8	1.46	1.34	1.36
381.5	1.46	1.35	1.38
399.2	1.47	1.37	1.40
416.9	1.47	1.38	1.42
434.6	1.46	1.39	1.45
452.3	1.44	1.39	1.47
470.0	1.43	1.39	1.47
487.7	1.42	1.40	1.49
505.4	1.42	1.41	1.52
523.1	1.42	1.42	1.54
540.8	1.41	1.43	1.55
558.5	1.39	1.42	1.56
576.2	1.39	1.43	1.57
593.8	1.40	1.45	1.59
611.5	1.40	1.46	1.61
629.2	1.39	1.47	1.64
646.9	1.38	1.48	1.65
664.6	1.38	1.48	1.65
682.3	1.38	1.49	1.66
700.0	1.39	1.51	1.69

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+17	28	1	24	19	37	29	46	42	---
1	-	9	+0	26	35	31	34	38	44	42	71	49
2	>100	59	33	43	34	66	40	50	50	56	52	74
3	>100	62	70	53	54	55	72	57	65	61	73	60
4	100	74	77	>81	71	74	71	>81	73	69	78	77
5	98	>81	>81	>81	>81	77	>81	78	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
7	96	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
8	98	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	94	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 2600.1 MHz; -14.00 dBm.**
LO IN: 2630.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.41 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+7	39	13	38	37	53	37	64	54	---
1	-	9	+0	29	34	36	41	53	57	59	>90	64
2	86	49	25	38	27	69	35	53	50	64	56	72
3	>100	56	53	43	38	48	61	50	51	56	62	61
4	>100	58	55	70	46	55	46	80	51	59	61	70
5	>100	70	67	67	72	56	53	57	70	59	67	64
6	>100	85	86	77	72	87	63	74	63	82	65	69
7	>100	85	87	81	82	76	83	65	67	66	82	70
8	>100	>90	88	>90	>90	87	83	90	77	84	78	89
9	>100	>90	>90	>90	>90	90	87	85	>90	75	78	77
10	---	---	>90	>90	>90	>90	>90	>90	>90	>90	>90	88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 2600.1 MHz; -4.00 dBm.**
LO IN: 2630.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.55 dBm


Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com


Frequency Mixer ADE-18W+

Typical Performance Curves


Conversion Loss @ IF=30MHz

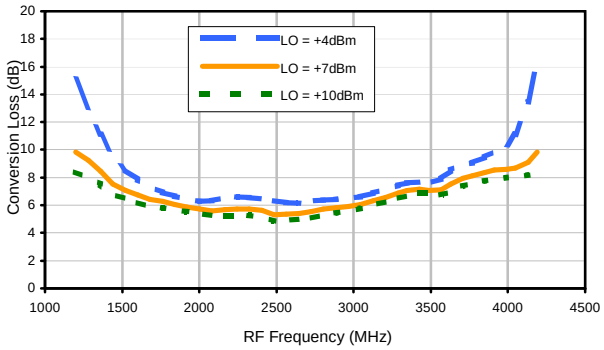


Conversion Loss vs. LO @ RF=2625.1MHz

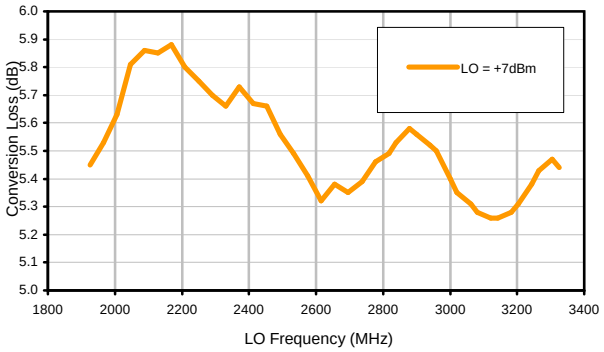


Conversion Loss vs. IF @ RF=2625.1MHz

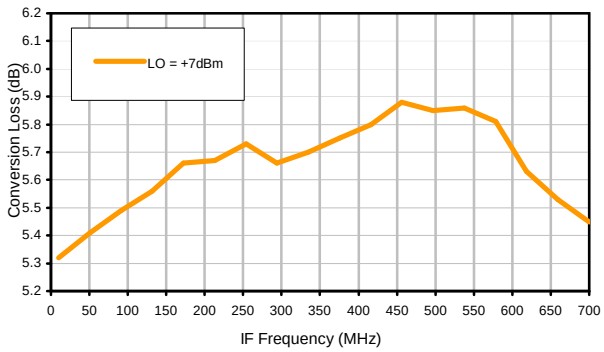


Conversion Loss vs. IF @ RF=1750.1MHz

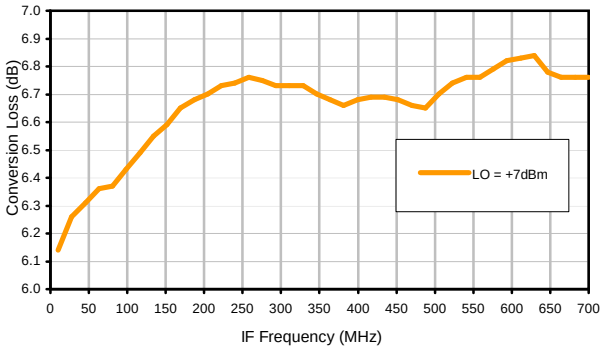


Conversion Loss vs. IF @ RF=3500.1MHz

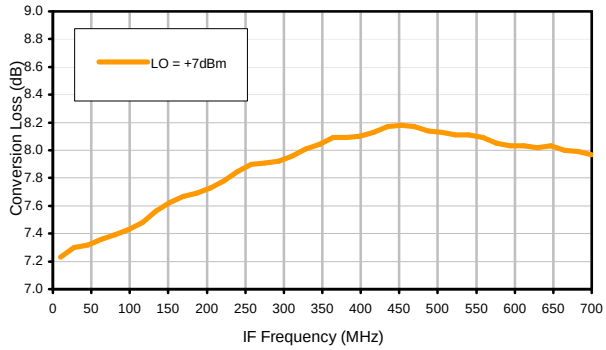

IP3 Input

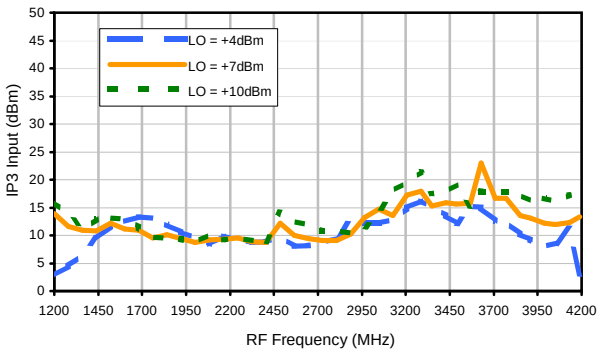


Compression @ RF IN=+1dBm

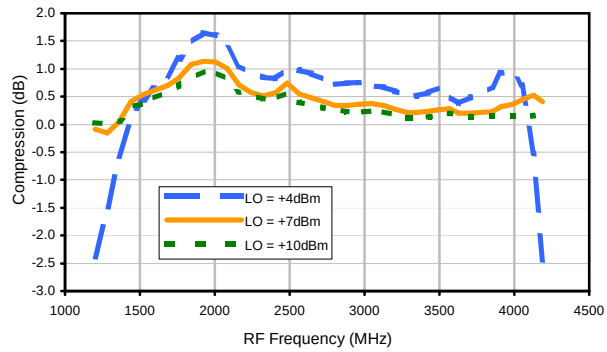


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


LO-RF Isolation

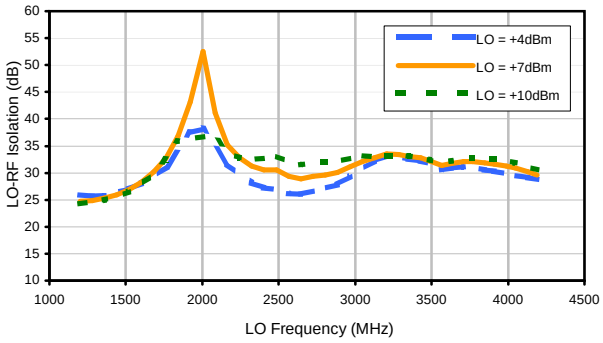


LO-IF Isolation

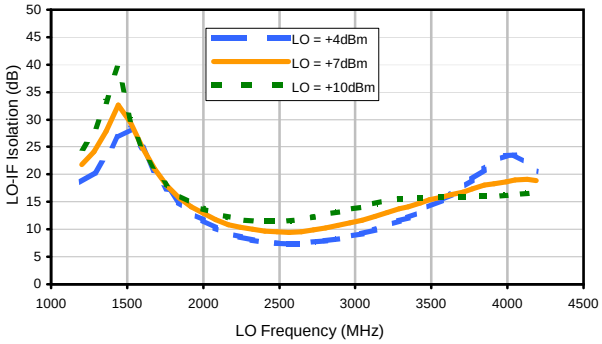


RF-IF Isolation

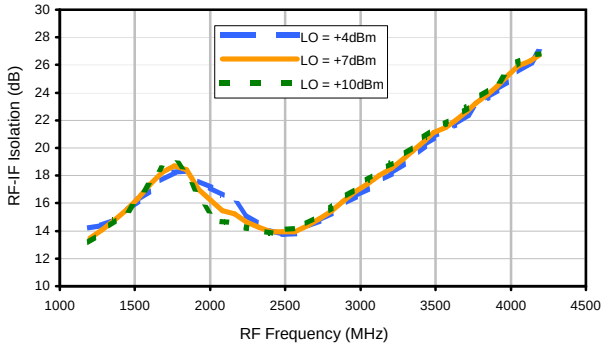


RF VSWR

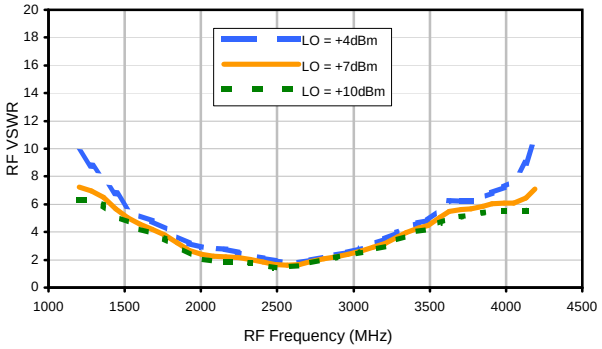

LO VSWR

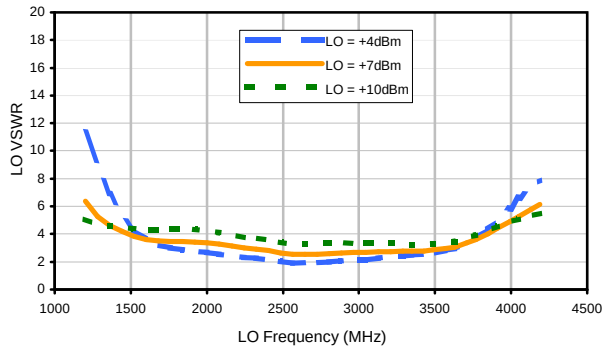

IF VSWR

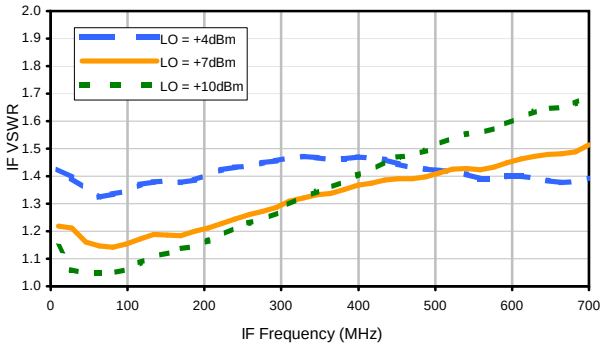

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Harmonics Tables

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+17	28	1	24	19	37	29	46	42	---
1	-	9	+0	26	35	31	34	38	44	42	71	49
2	>100	59	33	43	34	66	40	50	50	56	52	74
3	>100	62	70	53	54	55	72	57	65	61	73	60
4	100	74	77	>81	71	74	71	>81	73	69	78	77
5	98	>81	>81	>81	>81	77	>81	78	>81	>81	>81	>81
6	>100	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
7	96	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
8	98	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
9	94	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
10	---	---	>81	>81	>81	>81	>81	>81	>81	>81	>81	>81
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 2600.1 MHz; -14.00 dBm.**
LO IN: 2630.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.41 dBm

RF HARMONICS ORDER	(-dBm)	(-dBc)										
0	-	-	+7	39	13	38	37	53	37	64	54	---
1	-	9	+0	29	34	36	41	53	57	59	>90	64
2	86	49	25	38	27	69	35	53	50	64	56	72
3	>100	56	53	43	38	48	61	50	51	56	62	61
4	>100	58	55	70	46	55	46	80	51	59	61	70
5	>100	70	67	67	72	56	53	57	70	59	67	64
6	>100	85	86	77	72	87	63	74	63	82	65	69
7	>100	85	87	81	82	76	83	65	67	66	82	70
8	>100	>90	88	>90	>90	87	83	90	77	84	78	89
9	>100	>90	>90	>90	>90	90	87	85	>90	75	78	77
10	---	---	>90	>90	>90	>90	>90	>90	>90	>90	>90	88
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: **RF IN: 2600.1 MHz; -4.00 dBm.**
LO IN: 2630.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -9.55 dBm


Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style CD


CD541
CD542
CD636
CD637

Outline Dimensions

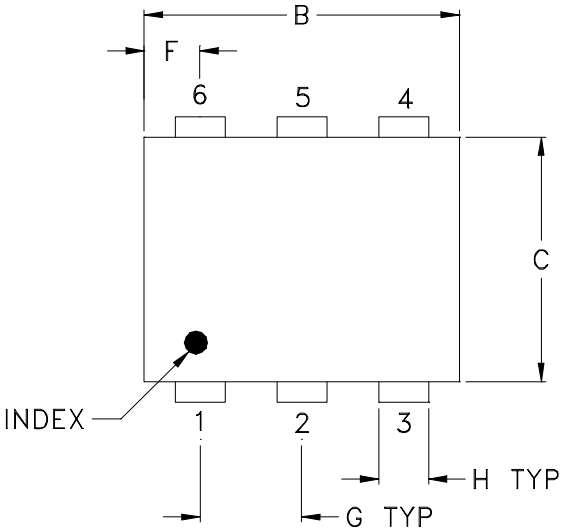

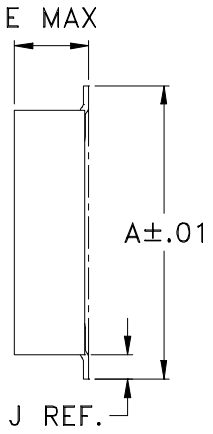

PCB Land Pattern

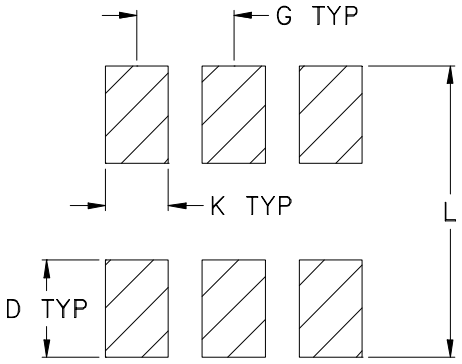

Suggested Layout,
Tolerance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.082 (2.08)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.15
CD542					.112 (2.84)							.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:


1. Case material: Plastic.
2. Termination finish:
   For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Tape & Reel Packaging TR-F34

DEVICE ORIENTATION IN T&R

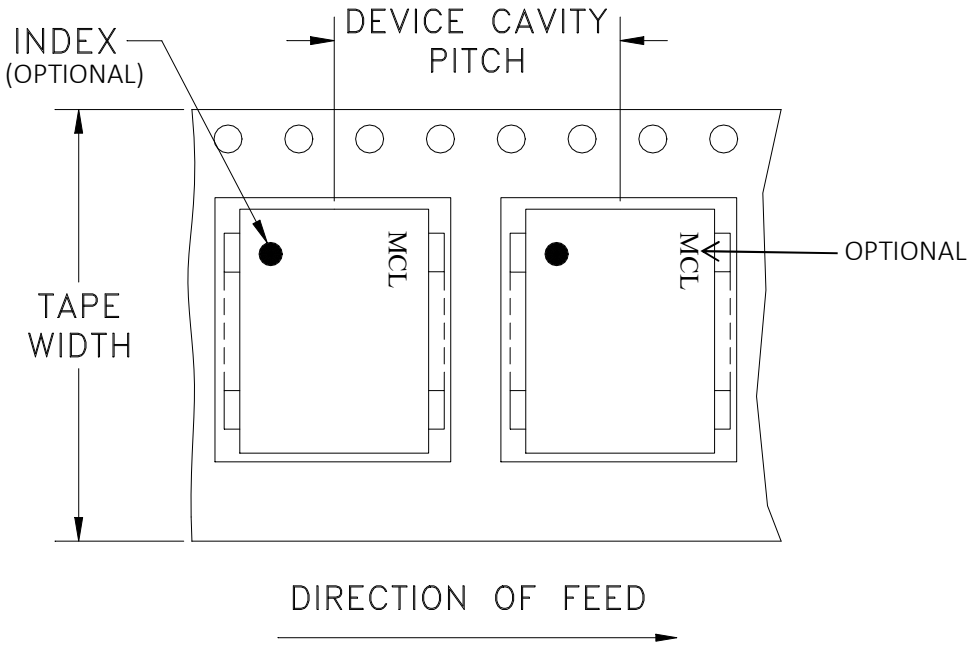

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf


Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

THIRD ANGLE PROJECTION

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/05/02	MMG	DJ
A	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL

SUGGESTED MOUNTING CONFIGURATION FOR CD541/542/636/637 CASE STYLES, "jv", "ju", "jw" PIN CONNECTIONS

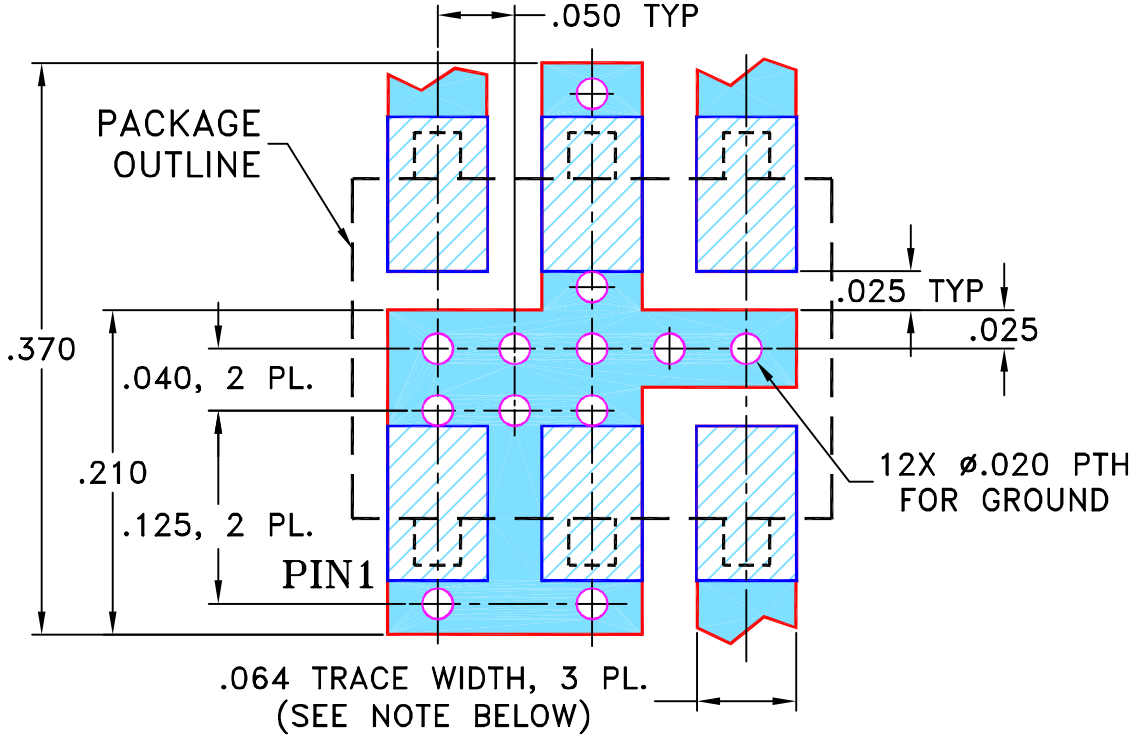

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	MMG	07/17/02
TOLERANCES ON:	CHECKED	WL	08/02/02
2 PL DECIMALS ±	APPROVED	DJ	08/05/02
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235


PL, jv/ju/jw, CD541/542/636/637, ADE, TB-02

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-051	A


FILE:	SCALE:	SHEET:
98PL051	8:1	1 OF 1

Evaluation Board and Circuit

For Pin Connections refer to Data Sheet of the DUT

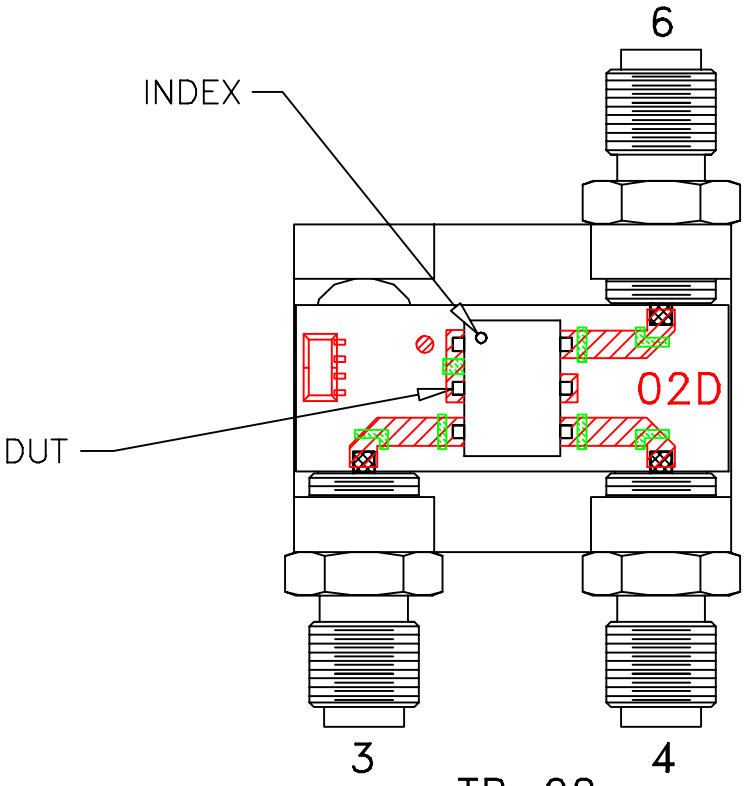

TB-02

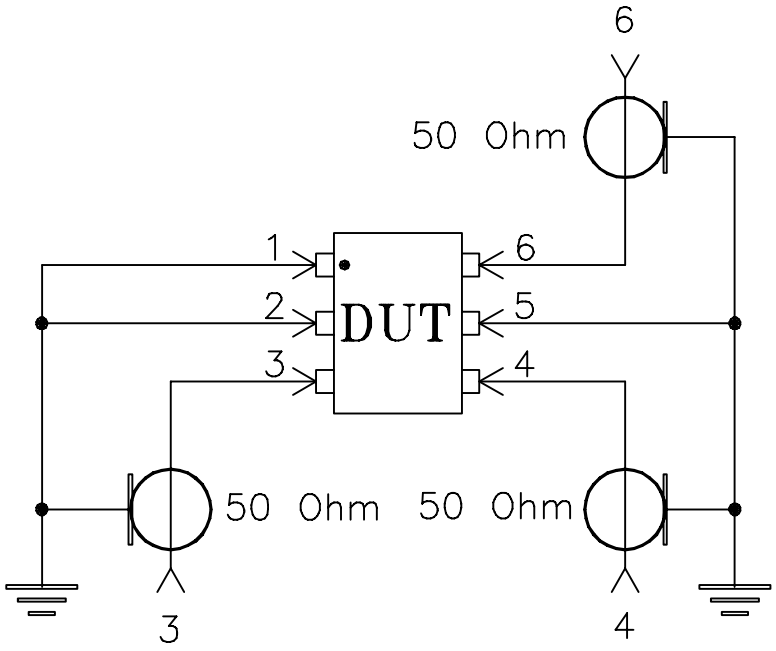

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers RO4350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications ENV02T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.